

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264694

Luminaire Tested: P3AS09R359730DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264694
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R359730DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 426.0 lumens
Efficiency: N/A
Efficacy: 38.4 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264694

CATALOG NUMBER: P3AS09R359730DE010 E3DLP1WMH

Luminous Intensity Polar Plot

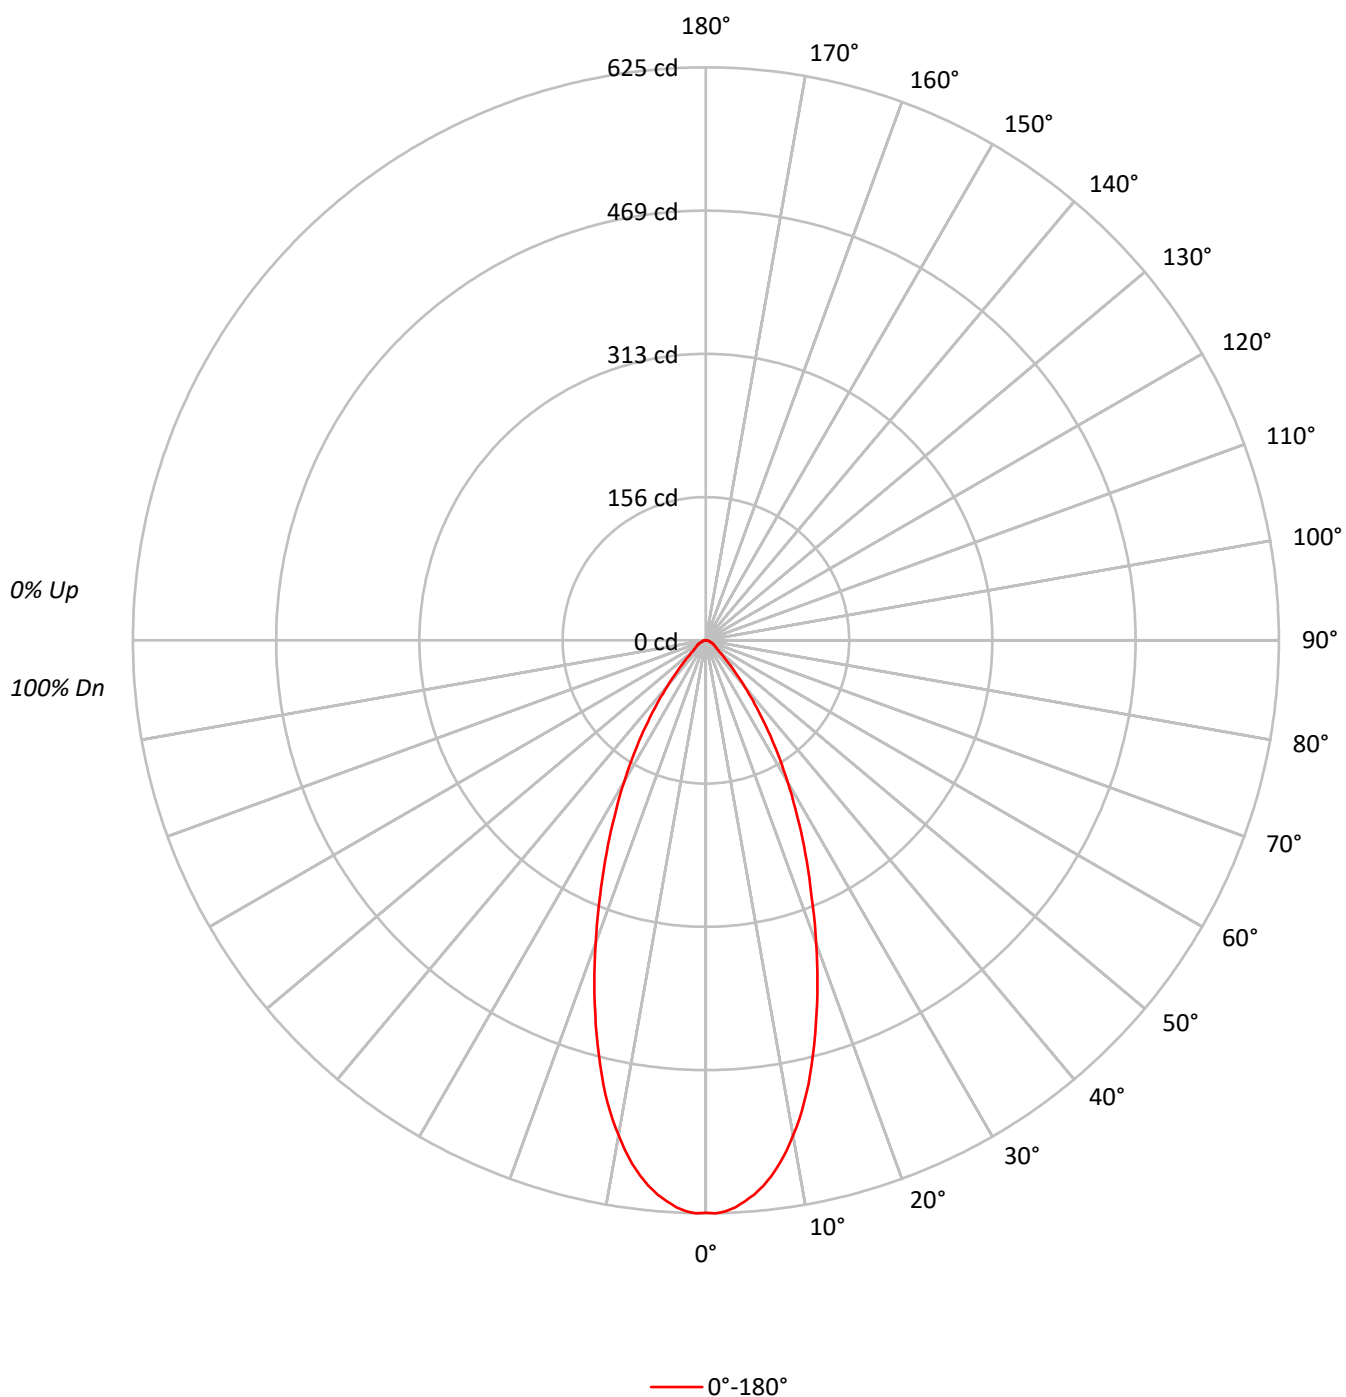

TEST NUMBER: P1264694

CATALOG NUMBER: P3AS09R359730DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	136919
5°	133546
10°	122109
15°	103633
20°	82047
25°	62060
30°	45172
35°	30544
40°	18778
45°	10792
50°	6482
55°	5276
60°	4605
65°	4099
70°	3334
75°	3304
80°	3283
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10792 cd/sqm

TEST NUMBER: P1264694

CATALOG NUMBER: P3AS09R359730DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.1	13.2
10°-20°	125.9	29.5
20°-30°	117.7	27.6
30°-40°	72.0	16.9
40°-50°	28.4	6.7
50°-60°	12.5	2.9
60°-70°	7.8	1.8
70°-80°	4.1	1.0
80°-90°	1.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	299.7	70.3
0°-40°	371.7	87.3
0°-60°	412.6	96.9
0°-90°	426.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	426.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	624	
5°	607	56
15°	456	126
25°	256	118
35°	114	72
45°	35	28
55°	14	13
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1264694

CATALOG NUMBER: P3AS09R359730DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	624.4
1°	625.1
2°	623.1
3°	619.2
4°	613.3
5°	606.7
6°	598.2
7°	588.4
8°	576.6
9°	563.4
10°	548.4
11°	532.6
12°	515.6
13°	497.2
14°	476.9
15°	456.5
17.5°	404.1
20°	351.6
22.5°	301.1
25°	256.5
27.5°	215.1
30°	178.4
32.5°	144.3
35°	114.1
37.5°	87.2
40°	65.6
42.5°	47.2
45°	34.8
47.5°	24.9
50°	19.0
52.5°	15.7
55°	13.8
57.5°	11.8
60°	10.5
62.5°	9.2
65°	7.9
67.5°	6.6
70°	5.2
72.5°	4.6
75°	3.9
77.5°	3.3
80°	2.6
82.5°	2.0
85°	1.3
87.5°	0.7



TEST NUMBER: P1264694
CATALOG NUMBER: P3AS09R359730DE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)