

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264787

Luminaire Tested: P3AS09R559730DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264787
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559730DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 97CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 847.0 lumens
Efficiency: N/A
Efficacy: 76.3 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264787

CATALOG NUMBER: P3AS09R559730DE010 E3D1H

Luminous Intensity Polar Plot

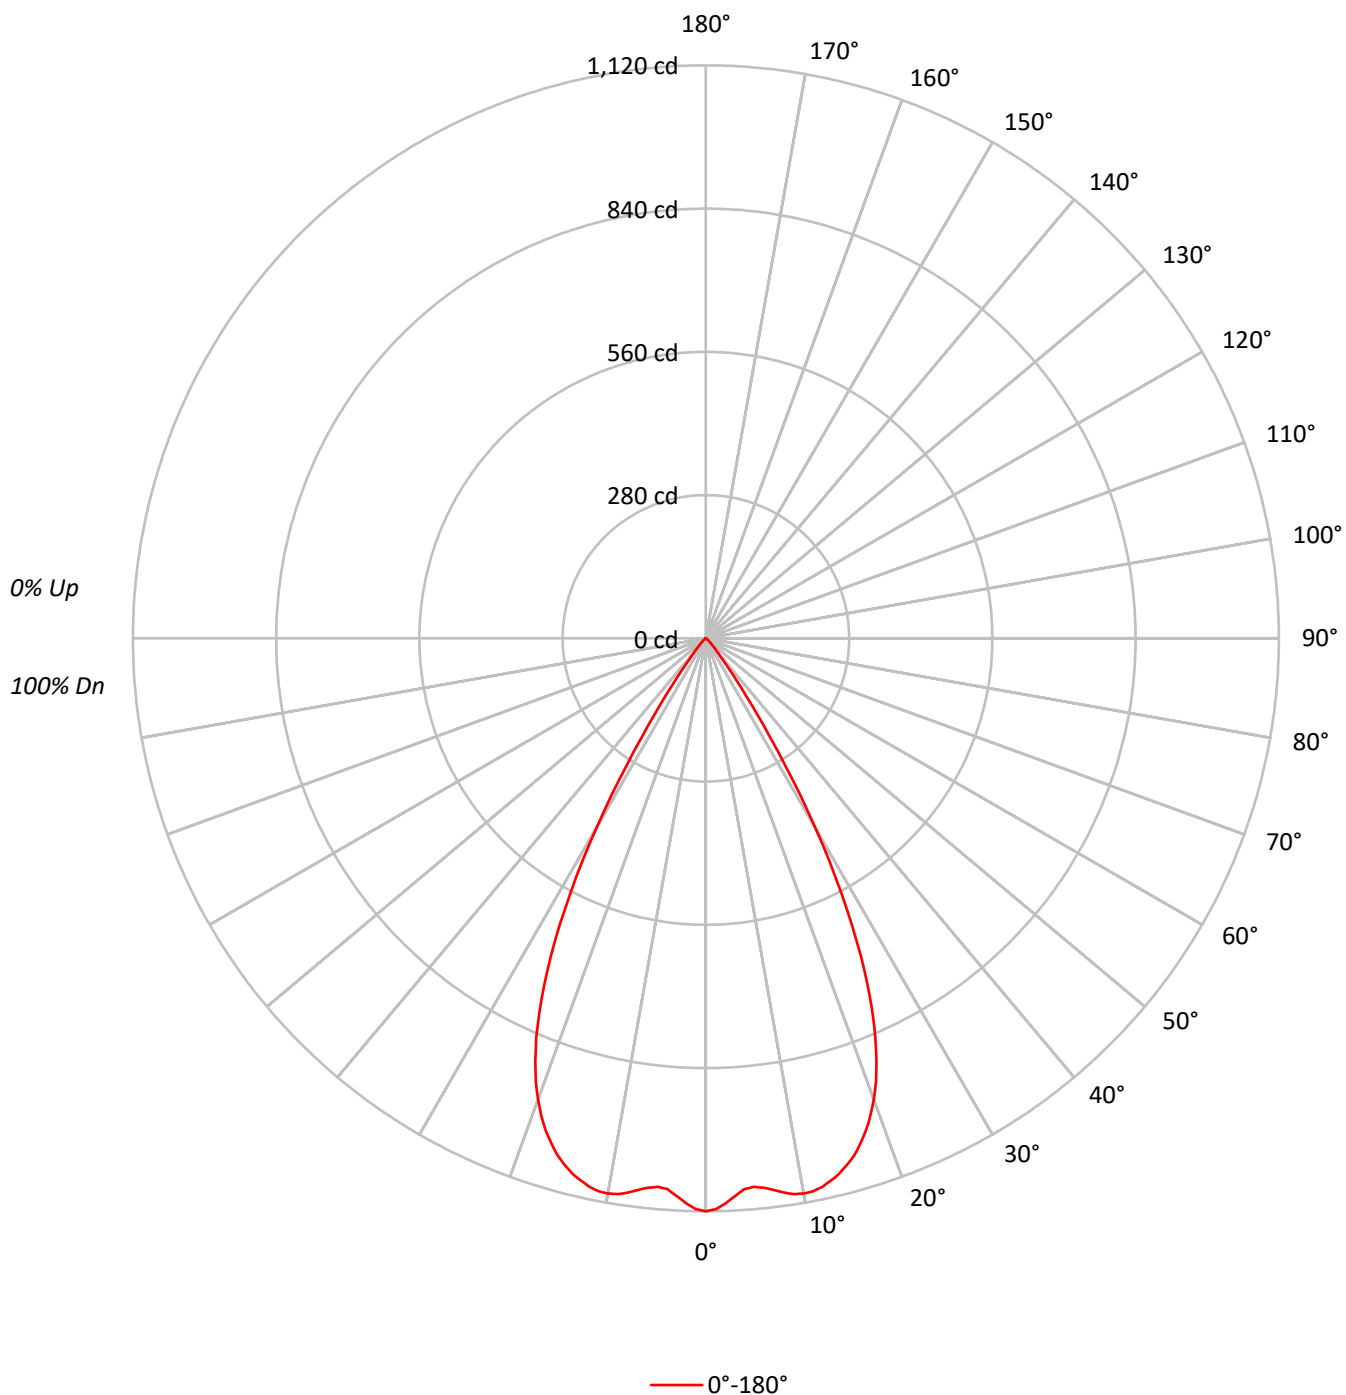

TEST NUMBER: P1264787

CATALOG NUMBER: P3AS09R559730DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91
3	104	98	94	90		102	97	93	90		95	91	88		92	89	87		90	88	86
4	100	93	88	84		98	92	87	84		90	86	83		88	84	82		86	83	81
5	95	88	83	79		94	87	82	78		85	81	78		84	80	77		82	79	76
6	91	83	78	74		90	82	77	74		81	76	73		80	76	73		78	75	72
7	87	79	73	70		86	78	73	69		77	72	69		76	72	69		75	71	68
8	83	75	69	66		82	74	69	66		73	69	65		72	68	65		71	68	65
9	80	71	66	62		79	71	66	62		70	65	62		69	65	62		68	64	61
10	77	68	62	59		76	67	62	59		67	62	59		66	62	59		65	61	58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	245616
5°	236935
10°	245397
15°	241931
20°	223926
25°	181099
30°	108523
35°	36781
40°	10133
45°	4497
50°	1330
55°	229
60°	132
65°	156
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4497 cd/sqm

TEST NUMBER: P1264787

CATALOG NUMBER: P3AS09R559730DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.1	12.3
10°-20°	296.7	35.0
20°-30°	329.8	38.9
30°-40°	102.7	12.1
40°-50°	12.3	1.5
50°-60°	0.9	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	730.7	86.3
0°-40°	833.4	98.4
0°-60°	846.6	100.0
0°-90°	847.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	847.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1120	
5°	1076	104
15°	1066	297
25°	748	330
35°	137	103
45°	14	12
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1264787

CATALOG NUMBER: P3AS09R559730DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1120.1
1°	1115.9
2°	1105.0
3°	1091.5
4°	1079.3
5°	1076.4
6°	1079.6
7°	1086.3
8°	1094.1
9°	1100.2
10°	1102.1
11°	1100.8
12°	1095.7
13°	1087.6
14°	1078.3
15°	1065.7
16°	1051.3
17°	1032.9
18°	1012.3
19°	987.5
20°	959.6
21°	927.7
22°	890.0
23°	848.5
24°	800.9
25°	748.5
26°	690.9
27°	629.7
28°	564.4
29°	497.2
30°	428.6
31°	359.8
32°	292.5
32.5°	262.6
33°	231.7
34°	179.2
35°	137.4
36°	104.6
37°	77.5
37.5°	66.3
38°	57.6
39°	43.8
40°	35.4
42.5°	22.5
45°	14.5

TEST NUMBER: P1264787

CATALOG NUMBER: P3AS09R559730DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
47.5°	8.7
50°	3.9
52.5°	1.3
55°	0.6
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)