

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264884

Luminaire Tested: P3AS09R709730DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264884
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R709730DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 97CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 661.0 lumens
Efficiency: N/A
Efficacy: 59.6 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264884

CATALOG NUMBER: P3AS09R709730DE010 E3DL1WMH

Luminous Intensity Polar Plot

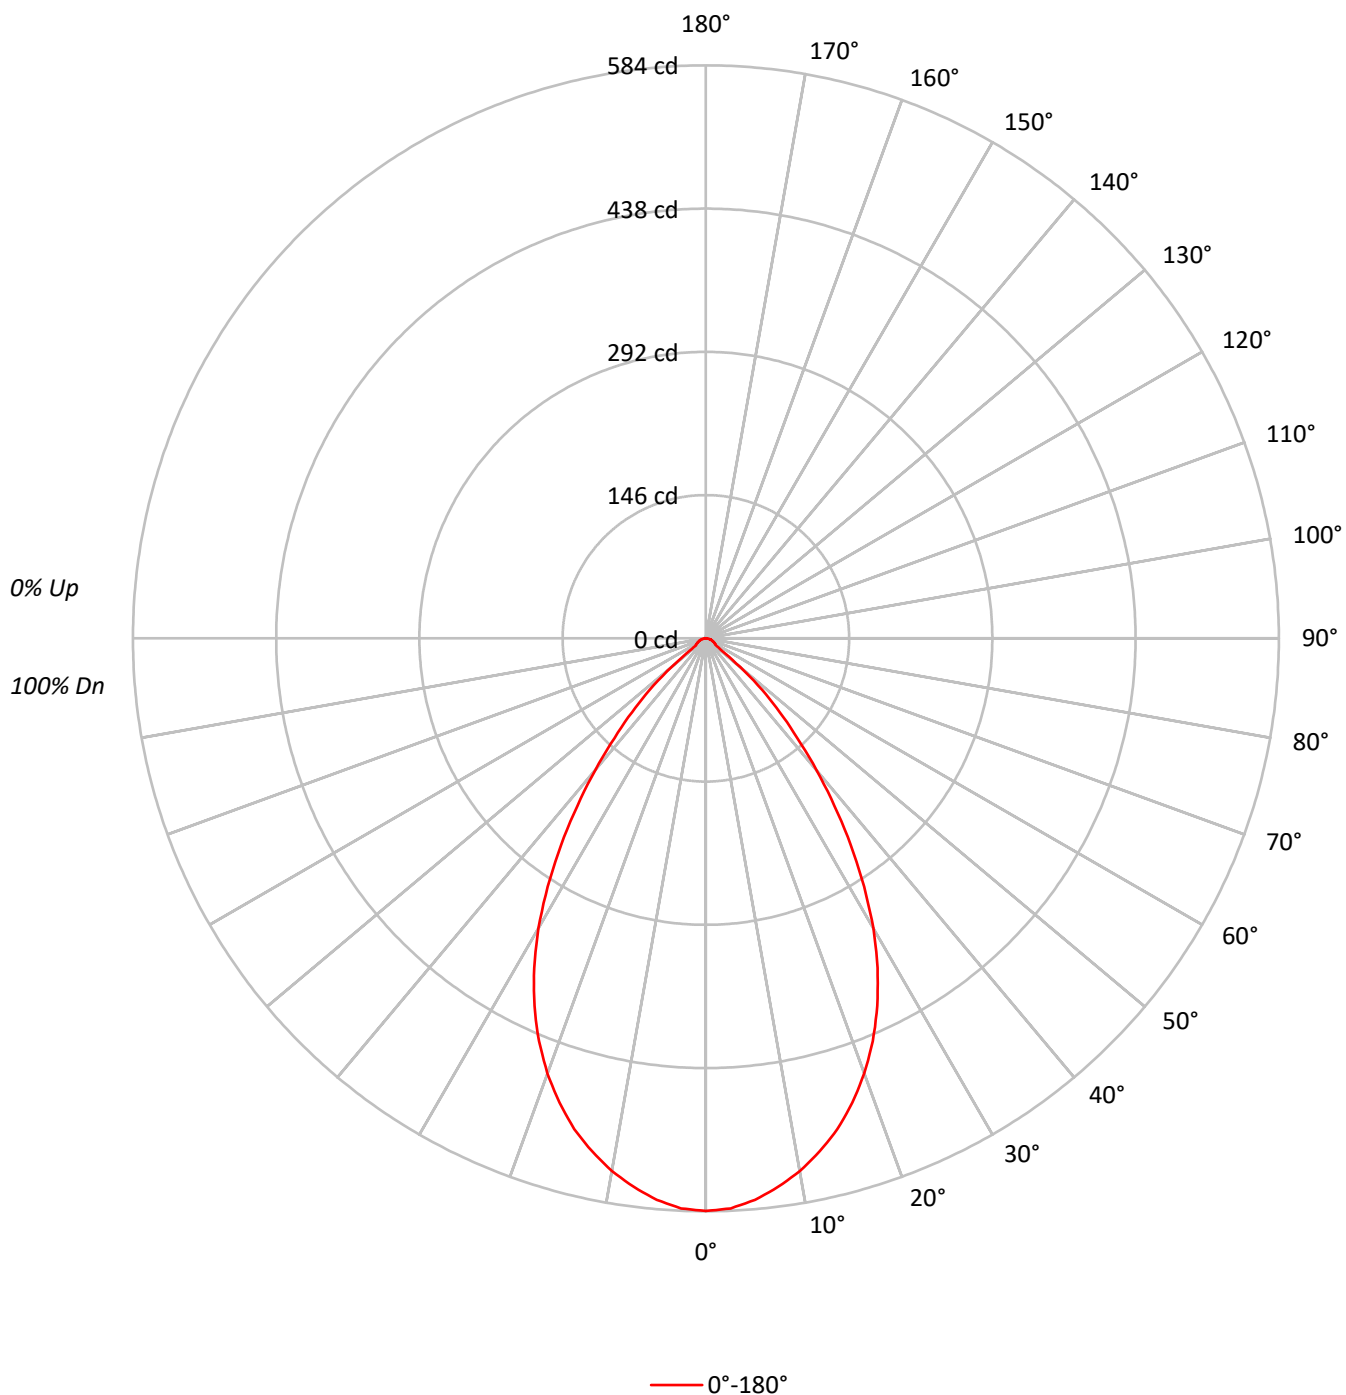

TEST NUMBER: P1264884

CATALOG NUMBER: P3AS09R709730DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	96	93	104	99	95	92	96	92	90		93	90	88		90
3	100	93	88	83	98	92	87	82	89	85	81		86	83	80		84
4	94	86	80	75	93	85	79	75	83	78	74		81	76	73		79
5	89	80	73	69	87	79	73	68	77	72	68		75	71	67		74
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	53	74	64	58	53	63	57	53		62	57	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	49	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	127972
5°	126436
10°	122777
15°	117572
20°	110143
25°	100046
30°	86418
35°	68877
40°	50180
45°	32965
50°	15454
55°	4779
60°	4605
65°	4410
70°	4231
75°	4490
80°	4167
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 32965 cd/sqm

TEST NUMBER: P1264884

CATALOG NUMBER: P3AS09R709730DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.1	8.2
10°-20°	145.0	21.9
20°-30°	188.4	28.5
30°-40°	159.9	24.2
40°-50°	82.4	12.5
50°-60°	15.9	2.4
60°-70°	8.6	1.3
70°-80°	5.3	0.8
80°-90°	1.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	387.4	58.6
0°-40°	547.3	82.8
0°-60°	645.6	97.7
0°-90°	661.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	661.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	584	
5°	574	54
15°	518	145
25°	414	188
35°	257	160
45°	106	82
55°	12	16
65°	8	9
75°	5	5
85°	1	2
90°	0	

TEST NUMBER: P1264884

CATALOG NUMBER: P3AS09R709730DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	583.6
2.5°	581.6
5°	574.4
7.5°	563.9
10°	551.4
12.5°	535.6
15°	517.9
17.5°	496.3
20°	472.0
22.5°	444.4
25°	413.5
27.5°	378.8
30°	341.3
32.5°	300.0
35°	257.3
37.5°	215.3
40°	175.3
42.5°	137.8
45°	106.3
47.5°	78.1
50°	45.3
52.5°	19.7
55°	12.5
57.5°	11.8
60°	10.5
62.5°	9.8
65°	8.5
67.5°	7.9
70°	6.6
72.5°	5.9
75°	5.3
77.5°	3.9
80°	3.3
82.5°	2.0
85°	1.3
87.5°	0.7
90°	0.0

(END OF REPORT)