

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265046

Luminaire Tested: P3AS13R259730DE010 E3PH1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265046
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R259730DE010 E3PH1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 926.0 lumens
Efficiency: N/A
Efficacy: 63.4 lumens/watt
Spacing Criteria (0/90/45): 0.36 / 0.36 / 0.36
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265046

CATALOG NUMBER: P3AS13R259730DE010 E3PH1MW

Luminous Intensity Polar Plot

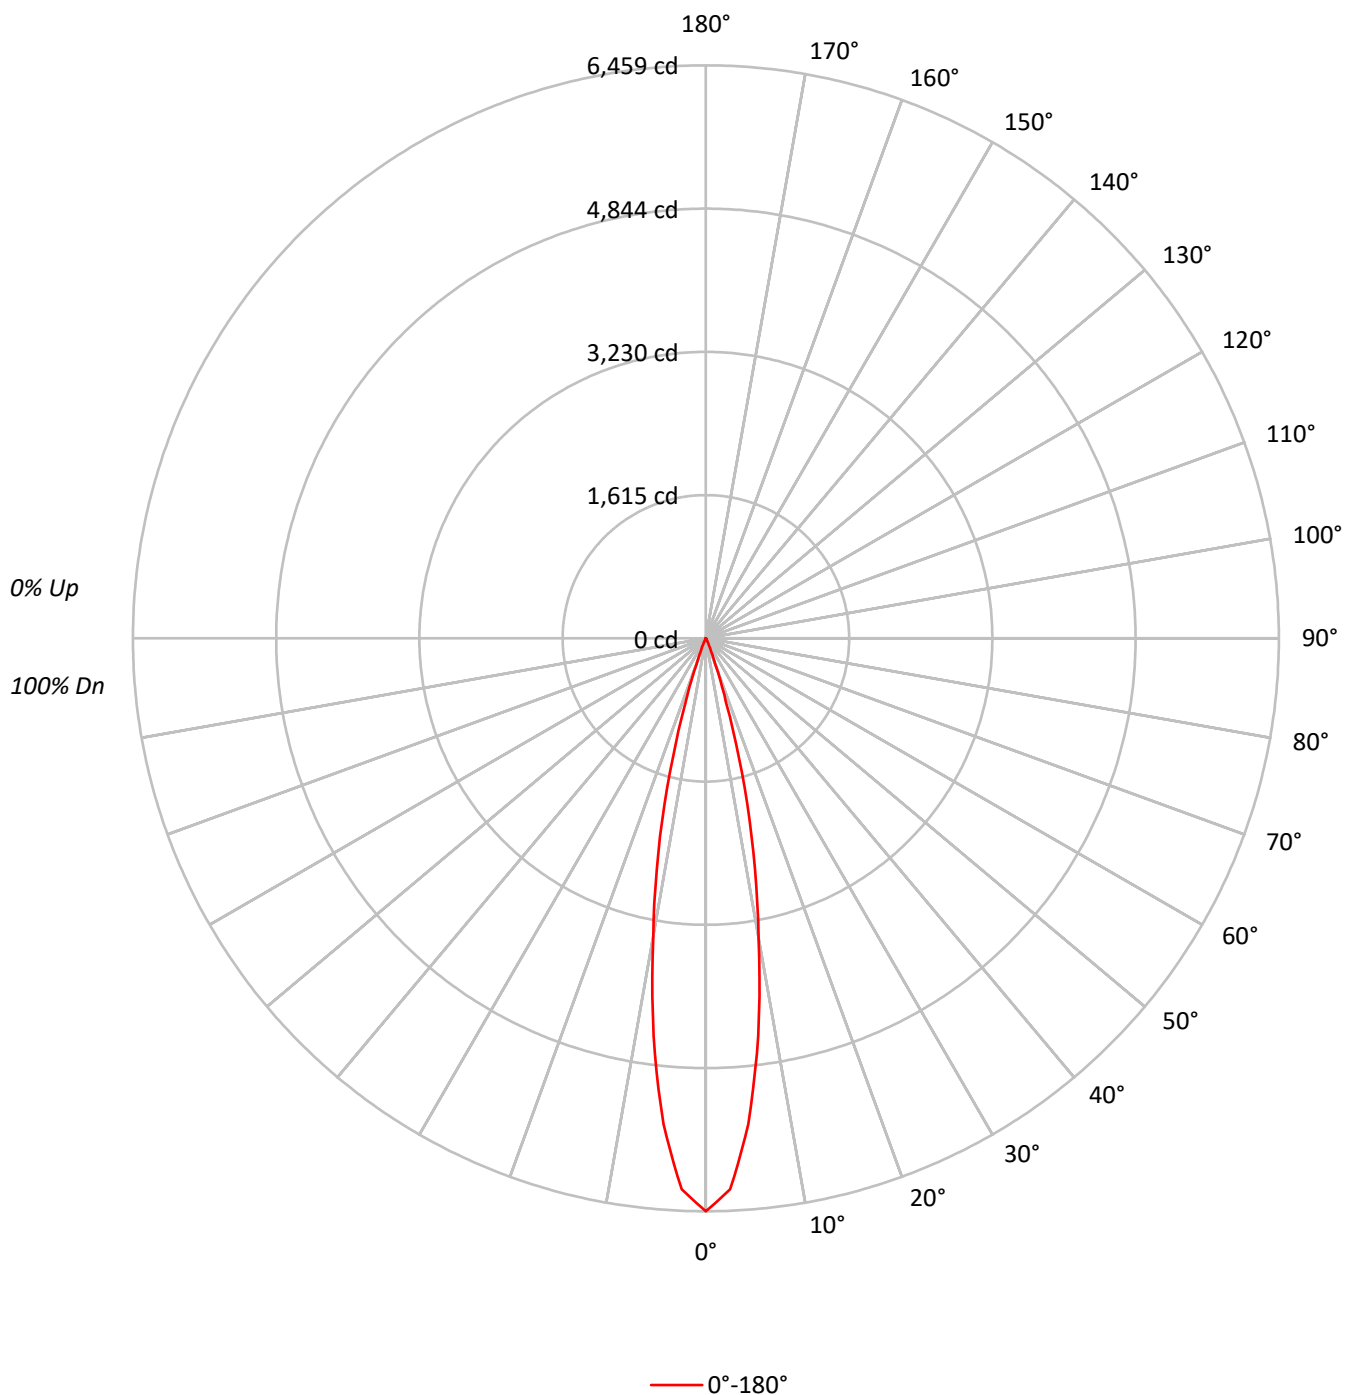



TEST NUMBER: P1265046

CATALOG NUMBER: P3AS13R259730DE010 E3PH1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106		104	103	102		101	100	99	98
2	113	109	107	105	111	108	105	103	105	103	101		102	100	99		99	98	97	96
3	110	106	103	100	108	104	102	99	102	100	98		100	98	96		98	96	95	94
4	107	103	99	97	106	102	99	96	100	97	95		98	96	94		96	95	93	92
5	105	100	96	94	103	99	96	93	97	95	93		96	94	92		95	93	91	90
6	102	97	94	91	101	97	93	91	95	93	91		94	92	90		93	91	89	89
7	100	95	92	89	99	95	91	89	94	91	89		93	90	88		92	89	88	87
8	98	93	90	87	98	93	89	87	92	89	87		91	88	87		90	88	86	85
9	97	91	88	86	96	91	88	85	90	87	85		89	87	85		89	86	85	84
10	95	89	86	84	94	89	86	84	88	86	84		88	85	83		87	85	83	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1416268
5°	1209594
10°	762600
15°	354917
20°	73086
25°	14904
30°	3190
35°	669
40°	372
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 0 cd/sqm

TEST NUMBER: P1265046

CATALOG NUMBER: P3AS13R259730DE010 E3PH1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	457.9	49.5
10°-20°	425.3	45.9
20°-30°	40.2	4.3
30°-40°	2.4	0.3
40°-50°	0.1	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	923.5	99.7
0°-40°	925.9	100.0
0°-60°	926.0	100.0
0°-90°	926.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	926.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6459	
5°	5495	458
15°	1563	425
25°	62	40
35°	2	2
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1265046

CATALOG NUMBER: P3AS13R259730DE010 E3PH1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	6458.7
2.5°	6218.5
5°	5495.2
7.5°	4517.9
10°	3424.9
12.5°	2474.1
15°	1563.4
17.5°	755.9
20°	313.2
22.5°	124.5
25°	61.6
27.5°	28.9
30°	12.6
32.5°	5.0
35°	2.5
37.5°	1.3
40°	1.3
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)