

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265115

Luminaire Tested: P3AS13R409730DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265115
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R409730DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 97CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1220.0 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265115
CATALOG NUMBER: P3AS13R409730DE010 E3D1H

Luminous Intensity Polar Plot

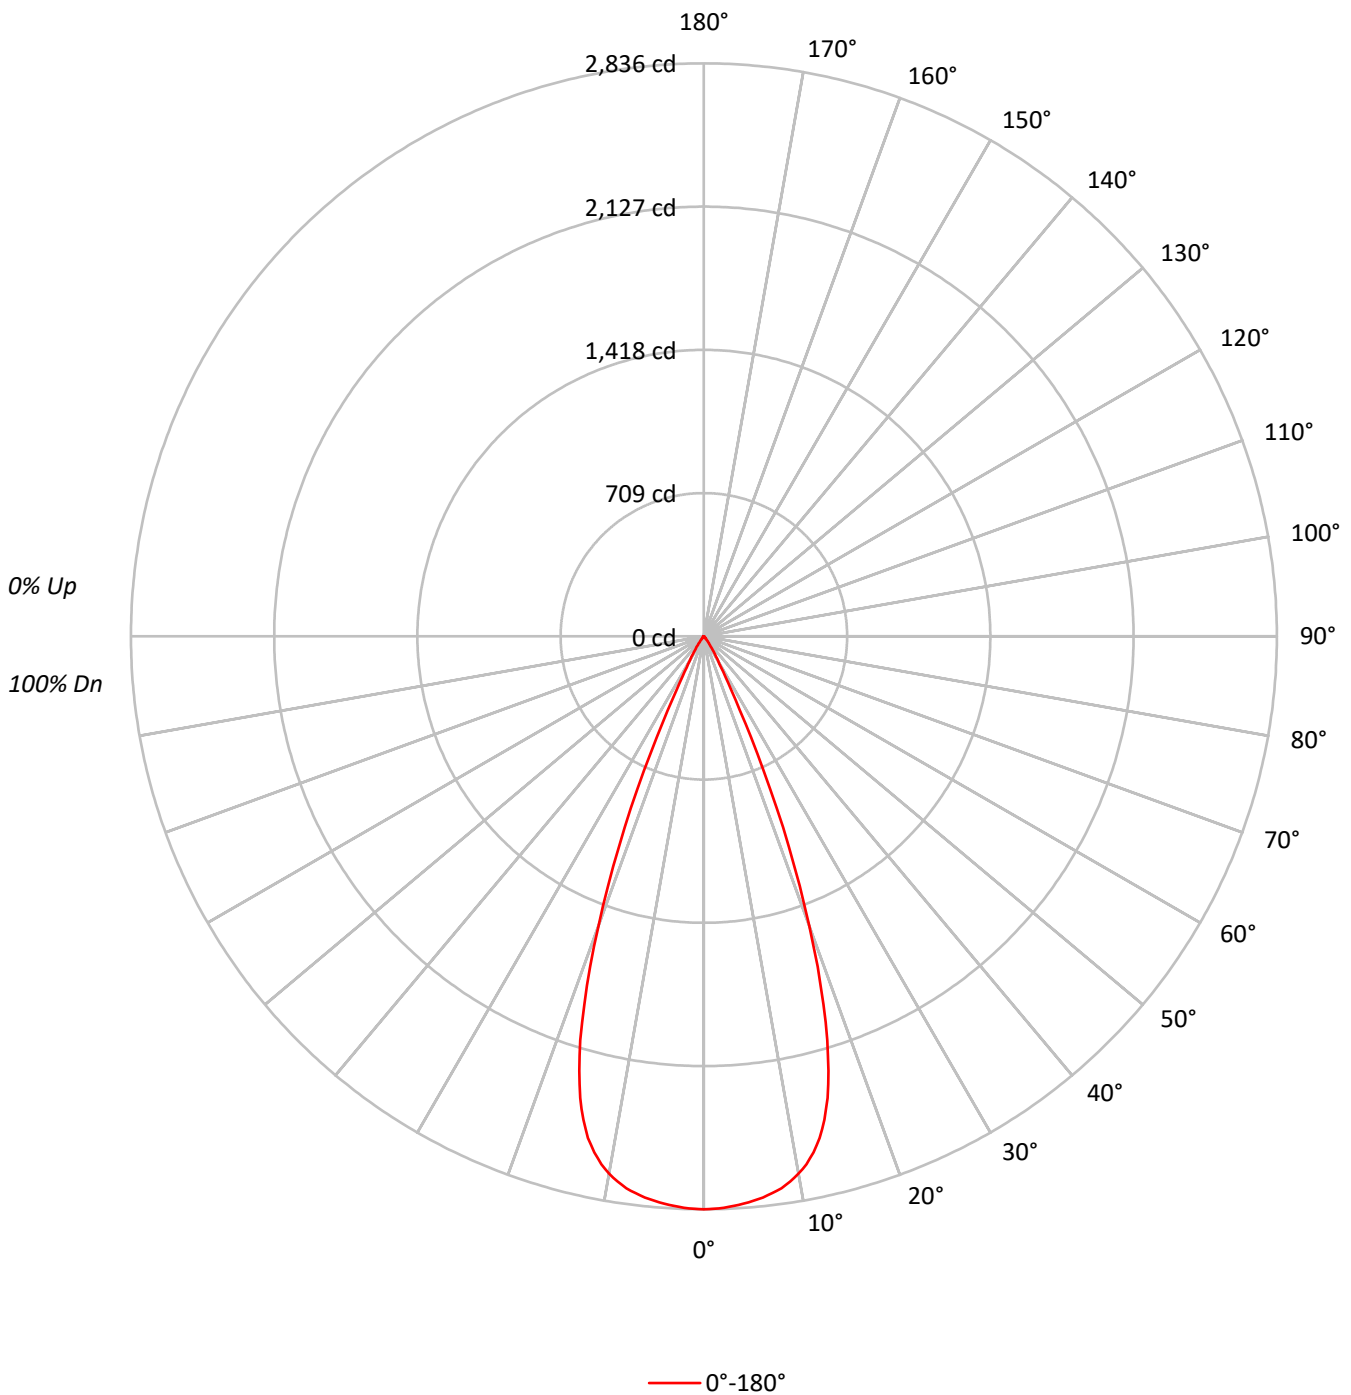



TEST NUMBER: P1265115
 CATALOG NUMBER: P3AS13R409730DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96		
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	92		
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88		
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85		
5	99	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82		
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	79		
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76		
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	79	76	74	73		
9	87	80	75	72	86	79	75	72	78	75	72	78	74	72	77	74	71	70		
10	84	77	72	70	83	77	72	69	76	72	69	75	72	69	74	71	69	68		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	621858
5°	617366
10°	601214
15°	537052
20°	356098
25°	133411
30°	35676
35°	13947
40°	5009
45°	2388
50°	716
55°	344
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2388 cd/sqm



TEST NUMBER: P1265115
 CATALOG NUMBER: P3AS13R409730DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	264.7	21.7
10°-20°	626.8	51.4
20°-30°	284.3	23.3
30°-40°	36.8	3.0
40°-50°	6.4	0.5
50°-60°	0.8	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1175.8	96.4
0°-40°	1212.6	99.4
0°-60°	1219.7	100.0
0°-90°	1220.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1220.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2836	
5°	2805	265
15°	2366	627
25°	551	284
35°	52	37
45°	8	6
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1265115
CATALOG NUMBER: P3AS13R409730DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	2835.9
1°	2834.2
2°	2829.9
3°	2823.5
4°	2815.4
5°	2804.7
6°	2792.4
7°	2777.0
8°	2758.2
9°	2732.6
10°	2700.1
11°	2662.1
12°	2611.3
13°	2548.5
14°	2466.5
15°	2365.7
16°	2237.1
17°	2090.6
18°	1914.7
19°	1728.9
20°	1526.0
21°	1323.1
22°	1123.3
23°	924.2
24°	728.6
25°	551.4
26°	408.3
27°	299.0
28°	224.7
29°	174.7
30°	140.9
31°	116.6
32°	97.4
32.5°	88.8
33°	80.3
34°	65.3
35°	52.1
36°	41.0
37°	32.5
37.5°	29.0
38°	25.6
39°	21.4
40°	17.5
42.5°	11.5
45°	7.7



TEST NUMBER: P1265115
CATALOG NUMBER: P3AS13R409730DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
47.5°	4.7
50°	2.1
52.5°	0.9
55°	0.9
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)