

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265125

Luminaire Tested: P3AS13R409730DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265125
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R409730DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 97CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1015.0 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265125

CATALOG NUMBER: P3AS13R409730DE010 E3DL1WMH

Luminous Intensity Polar Plot

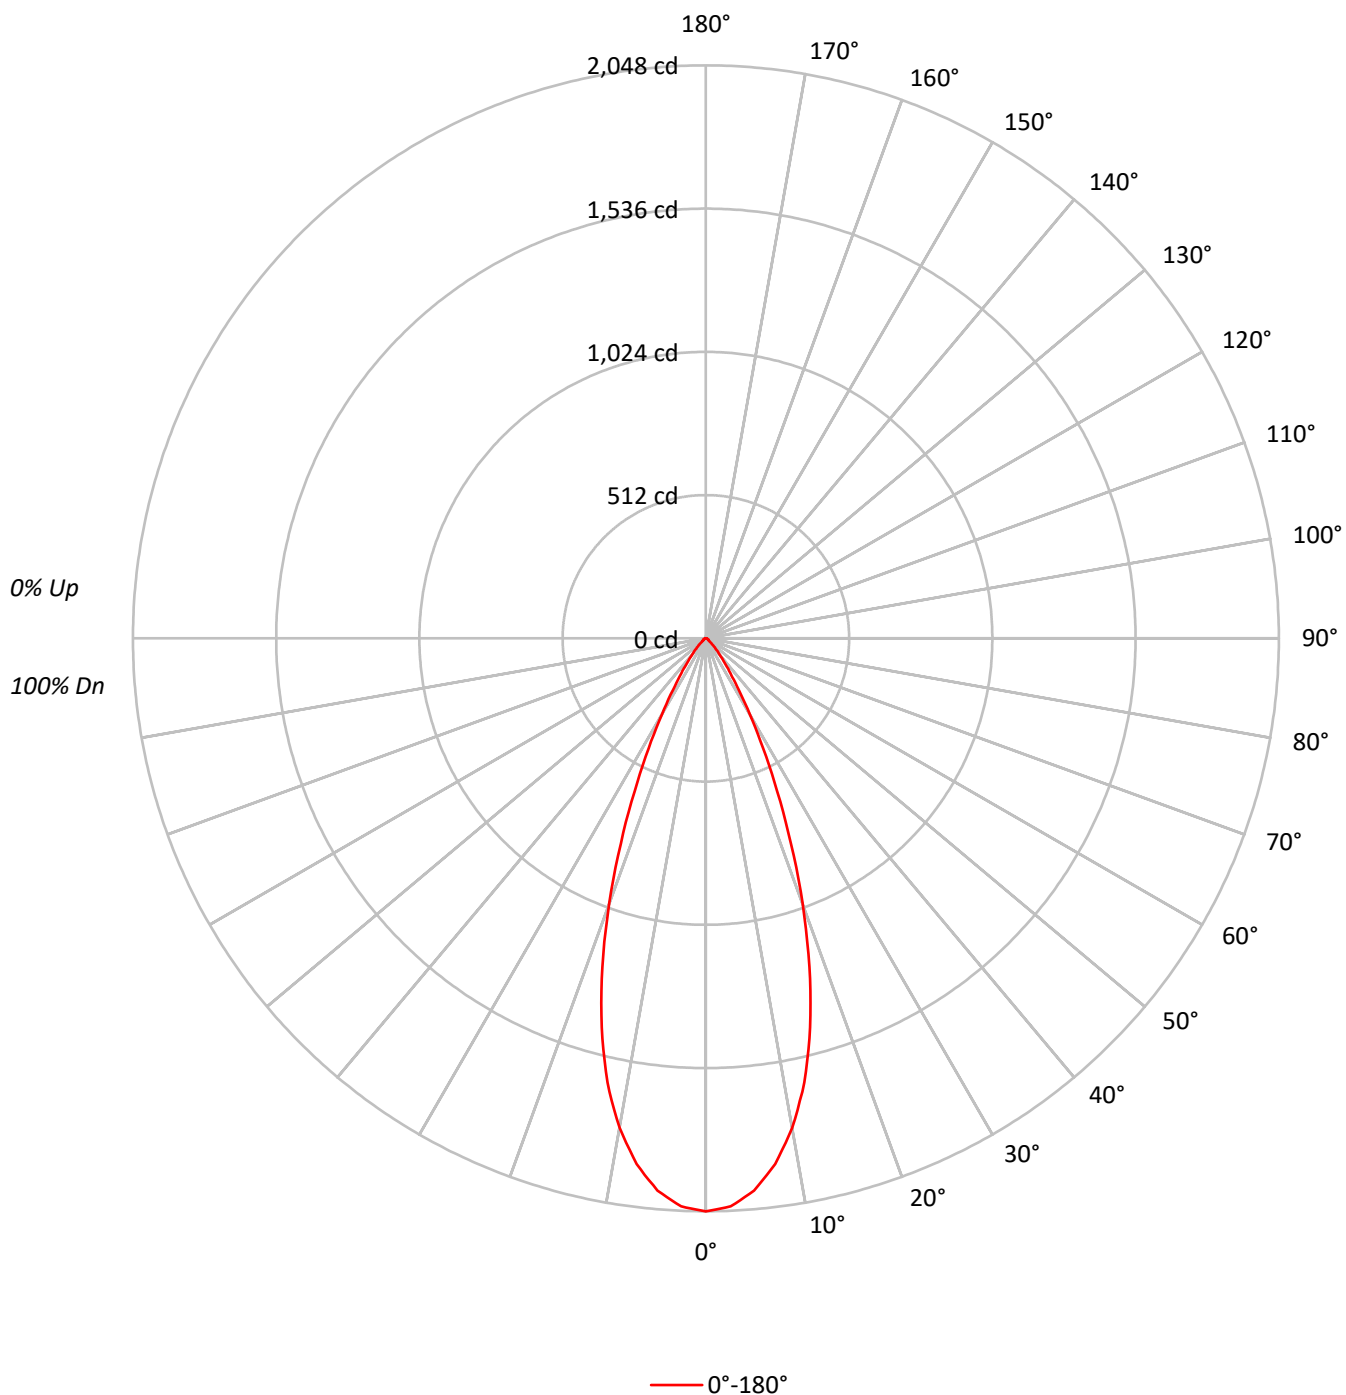

TEST NUMBER: P1265125

CATALOG NUMBER: P3AS13R409730DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	102	97	93	90	95	91	88		92	89	87		90
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86
5	96	88	83	79	94	88	83	79	86	82	78		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	68	84	76	71	67	75	70	67		74	70	67		73
9	82	73	68	64	81	73	68	64	72	67	64		71	67	64		70
10	78	70	65	62	78	70	65	61	69	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	449131
5°	436076
10°	395740
15°	326926
20°	235827
25°	145871
30°	78974
35°	40823
40°	22184
45°	12435
50°	6243
55°	4664
60°	4210
65°	4047
70°	3911
75°	3728
80°	3283
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 12435 cd/sqm

TEST NUMBER: P1265125

CATALOG NUMBER: P3AS13R409730DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.6	18.0
10°-20°	392.1	38.6
20°-30°	279.9	27.6
30°-40°	103.0	10.1
40°-50°	32.4	3.2
50°-60°	11.3	1.1
60°-70°	7.8	0.8
70°-80°	4.6	0.5
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	854.6	84.2
0°-40°	957.6	94.3
0°-60°	1001.4	98.7
0°-90°	1015.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1015.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2048	
5°	1981	183
15°	1440	392
25°	603	280
35°	152	103
45°	40	32
55°	12	11
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1265125

CATALOG NUMBER: P3AS13R409730DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2048.2
2.5°	2032.5
5°	1981.1
7.5°	1895.7
10°	1777.3
12.5°	1626.5
15°	1440.1
17.5°	1231.0
20°	1010.6
22.5°	793.7
25°	602.9
27.5°	442.6
30°	311.9
32.5°	218.7
35°	152.5
37.5°	108.0
40°	77.5
42.5°	55.8
45°	40.1
47.5°	27.0
50°	18.3
52.5°	13.1
55°	12.2
57.5°	11.3
60°	9.6
62.5°	8.7
65°	7.8
67.5°	7.0
70°	6.1
72.5°	5.2
75°	4.4
77.5°	3.5
80°	2.6
82.5°	1.7
85°	0.9
87.5°	0.9
90°	0.0

(END OF REPORT)