

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265153

Luminaire Tested: P3AS13R459730DE010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265153
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R459730DE010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 97CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 756.0 lumens
Efficiency: N/A
Efficacy: 51.8 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265153

CATALOG NUMBER: P3AS13R459730DE010 E3DLD1LI

Luminous Intensity Polar Plot

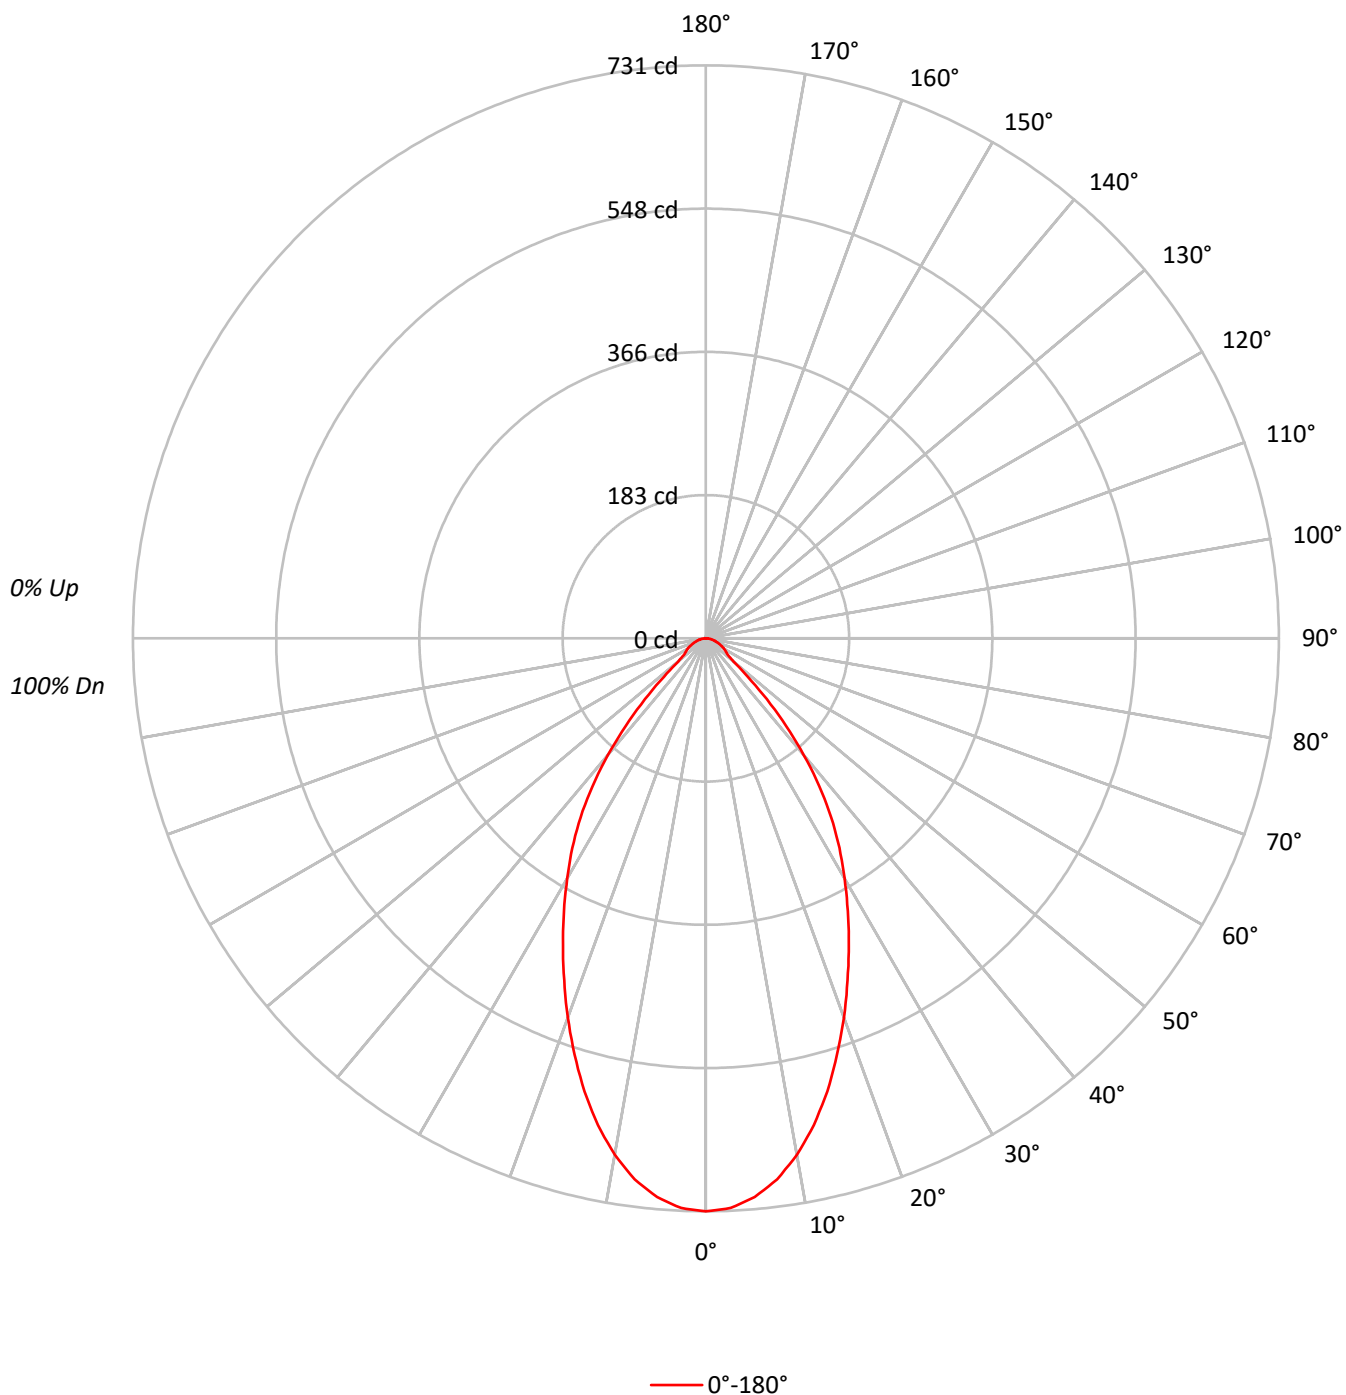

TEST NUMBER: P1265153

CATALOG NUMBER: P3AS13R459730DE010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83		
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75		
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69		
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63		
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58		
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54		
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50		
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47		
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	160294
5°	157451
10°	148984
15°	135869
20°	120154
25°	104353
30°	89558
35°	74633
40°	55618
45°	34050
50°	15761
55°	12310
60°	11841
65°	10844
70°	10066
75°	9574
80°	8840
85°	6542

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 34050 cd/sqm

TEST NUMBER: P1265153

CATALOG NUMBER: P3AS13R459730DE010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.8	8.8
10°-20°	166.6	22.0
20°-30°	198.0	26.2
30°-40°	172.0	22.8
40°-50°	86.3	11.4
50°-60°	29.9	4.0
60°-70°	21.0	2.8
70°-80°	11.7	1.6
80°-90°	3.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	431.5	57.1
0°-40°	603.5	79.8
0°-60°	719.7	95.2
0°-90°	756.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	756.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	731	
5°	715	67
15°	598	167
25°	431	198
35°	279	172
45°	110	86
55°	32	30
65°	21	21
75°	11	12
85°	3	4
90°	0	

TEST NUMBER: P1265153

CATALOG NUMBER: P3AS13R459730DE010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	731.0
2.5°	727.5
5°	715.3
7.5°	696.1
10°	669.1
12.5°	636.0
15°	598.5
17.5°	556.7
20°	514.9
22.5°	472.2
25°	431.3
27.5°	392.1
30°	353.7
32.5°	317.1
35°	278.8
37.5°	237.9
40°	194.3
42.5°	151.6
45°	109.8
47.5°	72.3
50°	46.2
52.5°	35.7
55°	32.2
57.5°	29.6
60°	27.0
62.5°	24.4
65°	20.9
67.5°	18.3
70°	15.7
72.5°	13.1
75°	11.3
77.5°	8.7
80°	7.0
82.5°	5.2
85°	2.6
87.5°	1.7
90°	0.0

(END OF REPORT)