

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265251

Luminaire Tested: P3AS13R659730DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265251
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R659730DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R65 optic, 3000K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1078.0 lumens
Efficiency: N/A
Efficacy: 73.8 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265251

CATALOG NUMBER: P3AS13R659730DE010 E3CB1MMS

Luminous Intensity Polar Plot

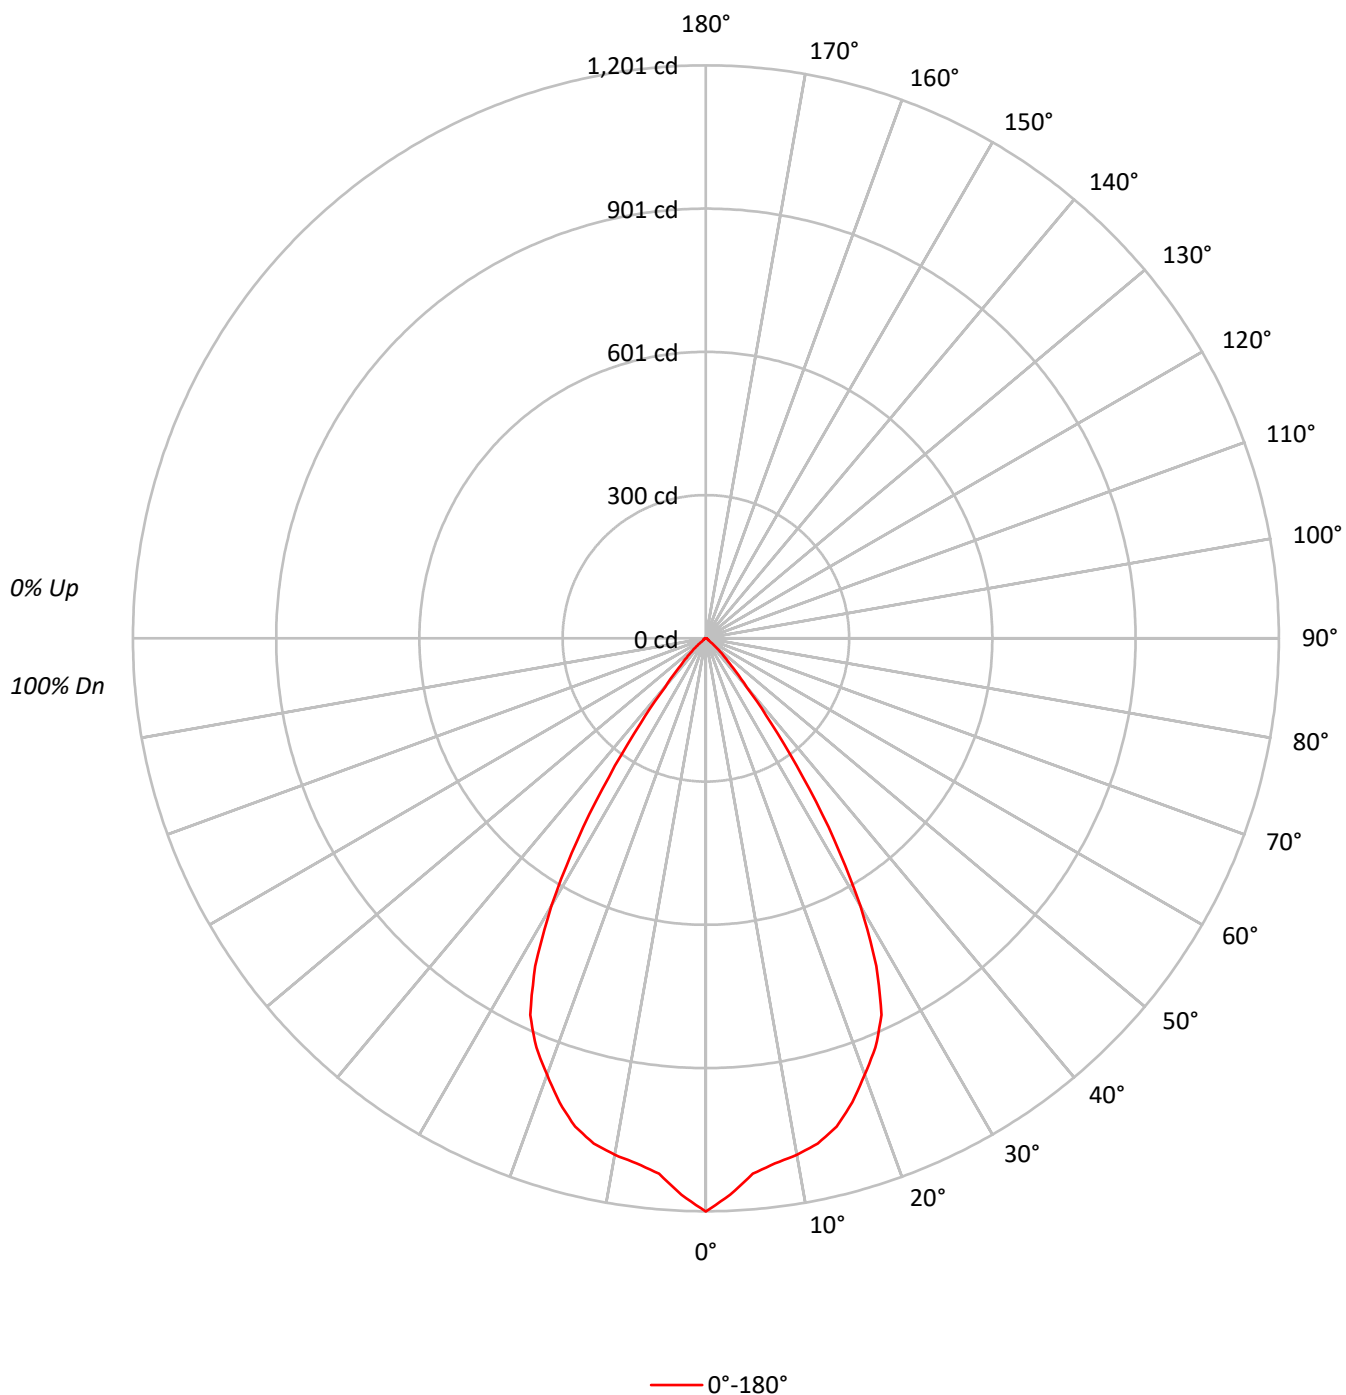

TEST NUMBER: P1265251

CATALOG NUMBER: P3AS13R659730DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	103	96	91	87	101	95	90	87	92	88	85		90	87	84		88
4	97	90	84	80	96	89	84	80	87	82	79		85	81	78		83
5	93	84	78	74	91	83	78	74	82	77	73		80	76	73		78
6	88	79	73	69	86	78	73	69	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	69	64	60	68	63	60		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		60	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	263444
5°	247941
10°	244796
15°	240478
20°	227053
25°	210738
30°	163797
35°	94763
40°	38186
45°	17583
50°	6857
55°	2676
60°	2281
65°	2283
70°	2244
75°	2203
80°	2147
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 17583 cd/sqm

TEST NUMBER: P1265251

CATALOG NUMBER: P3AS13R659730DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.1	9.9
10°-20°	295.8	27.4
20°-30°	387.2	35.9
30°-40°	224.3	20.8
40°-50°	48.0	4.5
50°-60°	7.8	0.7
60°-70°	4.3	0.4
70°-80°	2.5	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	790.1	73.3
0°-40°	1014.4	94.1
0°-60°	1070.3	99.3
0°-90°	1078.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1078.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1201	
5°	1126	107
15°	1059	296
25°	871	387
35°	354	224
45°	57	48
55°	7	8
65°	4	4
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1265251

CATALOG NUMBER: P3AS13R659730DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1201.4
2.5°	1167.4
5°	1126.4
7.5°	1109.8
10°	1099.4
12.5°	1084.6
15°	1059.3
17.5°	1020.0
20°	973.0
22.5°	928.5
25°	871.0
27.5°	774.2
30°	646.9
32.5°	501.3
35°	354.0
37.5°	224.1
40°	133.4
42.5°	83.7
45°	56.7
47.5°	36.6
50°	20.1
52.5°	9.6
55°	7.0
57.5°	6.1
60°	5.2
62.5°	5.2
65°	4.4
67.5°	3.5
70°	3.5
72.5°	2.6
75°	2.6
77.5°	1.7
80°	1.7
82.5°	0.9
85°	0.9
87.5°	0.9
90°	0.0

(END OF REPORT)