

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265379

Luminaire Tested: P3AS17R259730DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265379
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R259730DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 453.9 lumens
Efficiency: N/A
Efficacy: 21.4 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265379

CATALOG NUMBER: P3AS17R259730DE010 E3DLD1GPH

Luminous Intensity Polar Plot

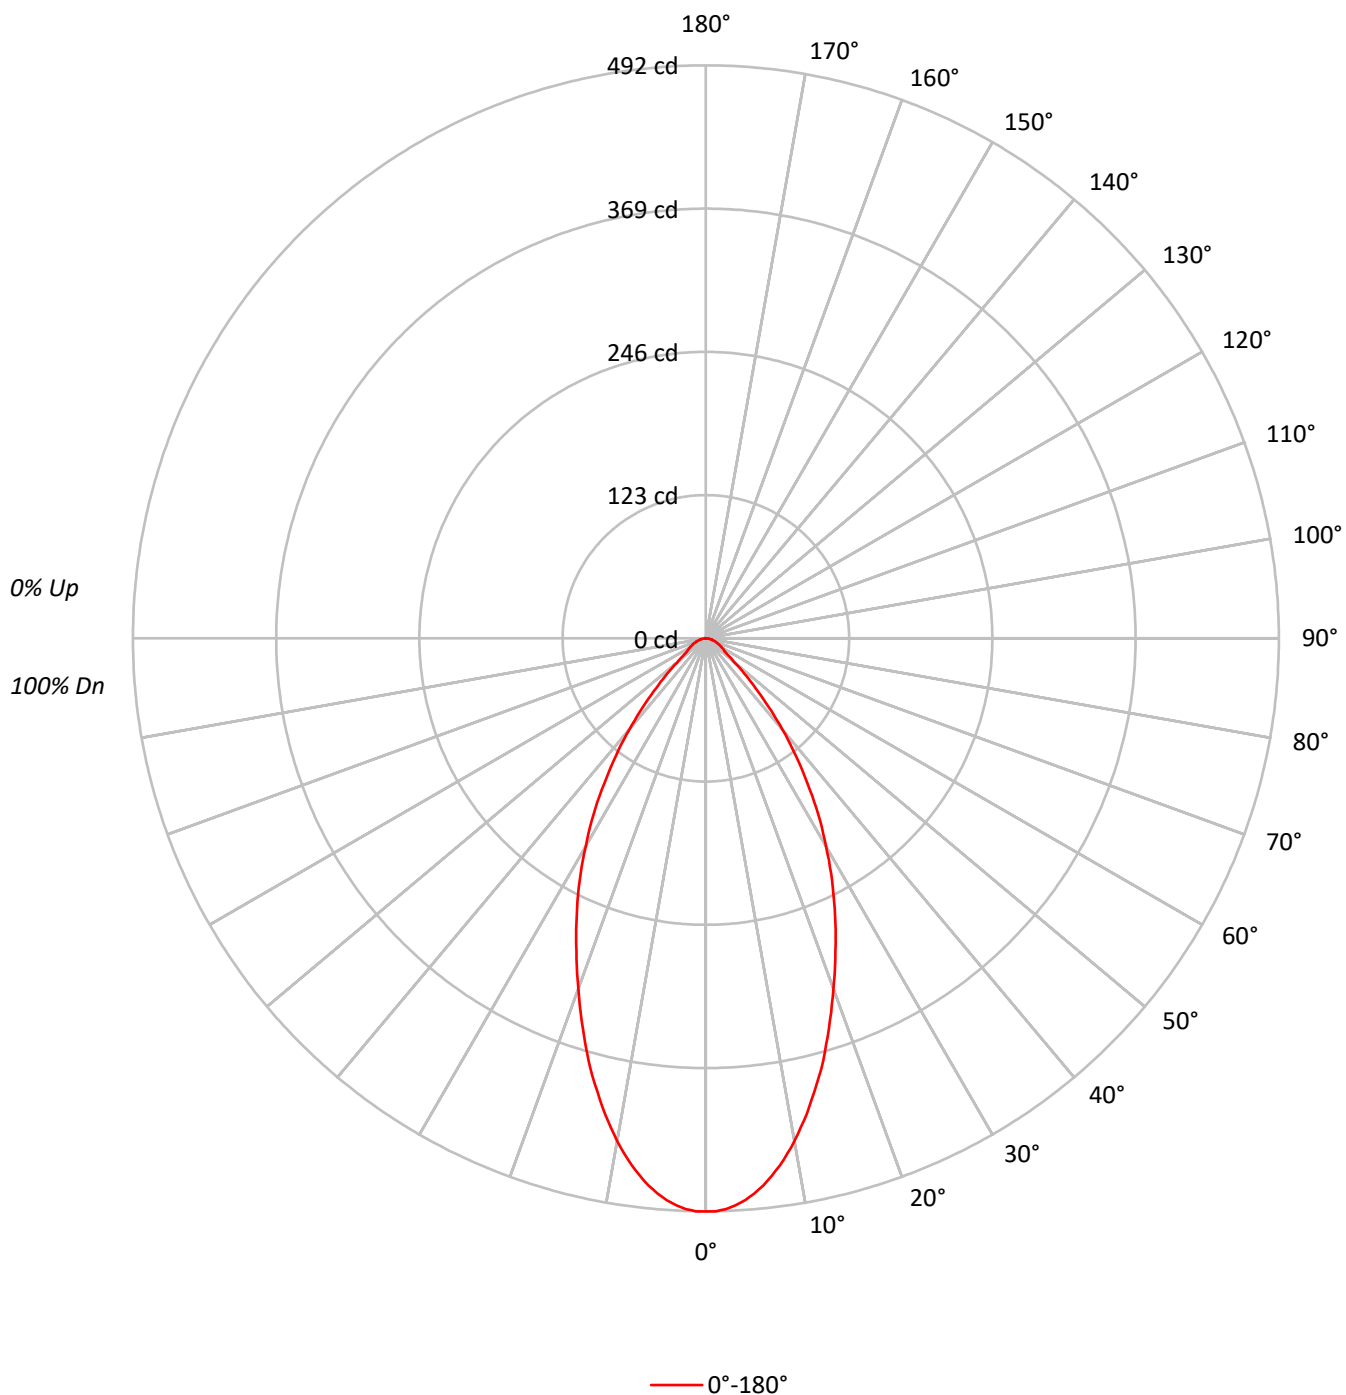

TEST NUMBER: P1265379

CATALOG NUMBER: P3AS17R259730DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	107908
5°	105327
10°	97593
15°	86924
20°	74696
25°	63488
30°	52261
35°	40716
40°	29312
45°	18607
50°	10985
55°	7570
60°	6929
65°	6434
70°	5770
75°	5253
80°	5051
85°	4277

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18607 cd/sqm

TEST NUMBER: P1265379

CATALOG NUMBER: P3AS17R259730DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.4	9.8
10°-20°	106.3	23.4
20°-30°	120.1	26.5
30°-40°	95.0	20.9
40°-50°	48.0	10.6
50°-60°	19.2	4.2
60°-70°	12.3	2.7
70°-80°	6.8	1.5
80°-90°	1.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	270.8	59.6
0°-40°	365.8	80.6
0°-60°	433.0	95.4
0°-90°	453.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	453.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	492	
5°	478	44
15°	383	106
25°	262	120
35°	152	95
45°	60	48
55°	20	19
65°	12	12
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1265379

CATALOG NUMBER: P3AS17R259730DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	492.1
1°	492.1
2°	490.4
3°	487.5
4°	483.6
5°	478.5
6°	472.3
7°	464.9
8°	457.0
9°	447.9
10°	438.3
11°	427.6
12°	417.4
13°	405.5
14°	394.2
15°	382.9
17.5°	351.2
20°	320.1
22.5°	290.7
25°	262.4
27.5°	234.7
30°	206.4
32.5°	179.9
35°	152.1
37.5°	126.7
40°	102.4
42.5°	79.7
45°	60.0
47.5°	44.7
50°	32.2
52.5°	24.3
55°	19.8
57.5°	18.1
60°	15.8
62.5°	14.1
65°	12.4
67.5°	10.7
70°	9.0
72.5°	7.9
75°	6.2
77.5°	5.1
80°	4.0
82.5°	2.8
85°	1.7
87.5°	0.6



TEST NUMBER: P1265379

CATALOG NUMBER: P3AS17R259730DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)