

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265407

Luminaire Tested: P3AS17R309730DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265407
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309730DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 97CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1222.0 lumens
Efficiency: N/A
Efficacy: 57.6 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265407
CATALOG NUMBER: P3AS17R309730DE010 E3DL1LI

Luminous Intensity Polar Plot

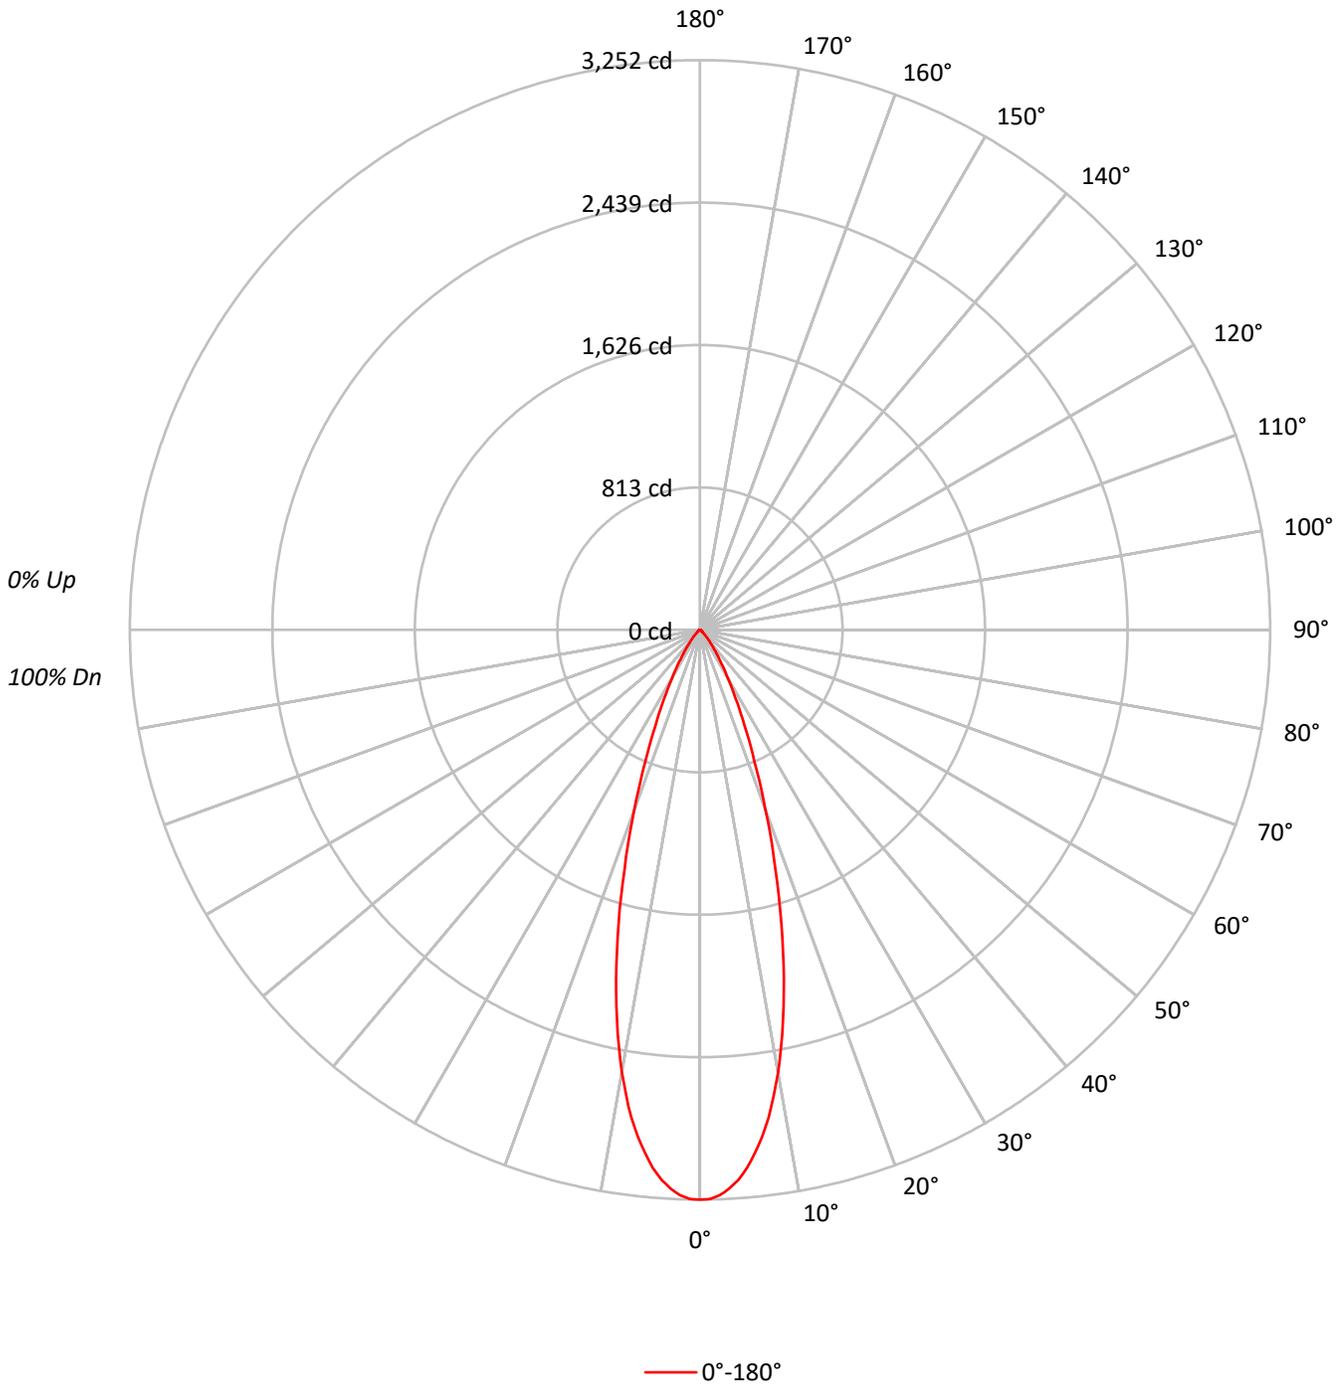



TEST NUMBER: P1265407
 CATALOG NUMBER: P3AS17R309730DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| RCR | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 99 | 98 | 97 | 100 |
| 1 | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 95 | 95 | 93 | 92 | 95 |
| 2 | 110 | 105 | 102 | 99 | 107 | 104 | 101 | 98 | 101 | 98 | 96 | 98 | 96 | 94 | 95 | 93 | 92 | 90 | 91 | 89 | 87 | 90 |
| 3 | 105 | 100 | 96 | 92 | 103 | 98 | 95 | 91 | 96 | 93 | 90 | 94 | 91 | 89 | 91 | 89 | 87 | 86 | 88 | 85 | 83 | 86 |
| 4 | 101 | 95 | 90 | 87 | 99 | 94 | 89 | 86 | 92 | 88 | 85 | 90 | 87 | 84 | 88 | 85 | 83 | 82 | 85 | 82 | 79 | 82 |
| 5 | 97 | 90 | 85 | 82 | 96 | 89 | 85 | 81 | 88 | 84 | 81 | 86 | 83 | 80 | 85 | 82 | 79 | 78 | 85 | 82 | 79 | 78 |
| 6 | 94 | 86 | 81 | 78 | 92 | 85 | 81 | 77 | 84 | 80 | 77 | 83 | 79 | 76 | 81 | 78 | 76 | 75 | 81 | 78 | 76 | 75 |
| 7 | 90 | 82 | 77 | 74 | 89 | 82 | 77 | 74 | 81 | 76 | 73 | 80 | 76 | 73 | 79 | 75 | 73 | 71 | 79 | 75 | 73 | 71 |
| 8 | 87 | 79 | 74 | 71 | 86 | 79 | 74 | 71 | 78 | 73 | 70 | 77 | 73 | 70 | 76 | 72 | 70 | 69 | 76 | 72 | 70 | 69 |
| 9 | 84 | 76 | 71 | 68 | 83 | 75 | 71 | 68 | 75 | 70 | 67 | 74 | 70 | 67 | 73 | 70 | 67 | 66 | 73 | 70 | 67 | 66 |
| 10 | 81 | 73 | 68 | 65 | 80 | 73 | 68 | 65 | 72 | 68 | 65 | 71 | 67 | 65 | 71 | 67 | 65 | 63 | 71 | 67 | 65 | 63 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 713079 |
| 5° | 678691 |
| 10° | 570887 |
| 15° | 411694 |
| 20° | 255382 |
| 25° | 145242 |
| 30° | 80671 |
| 35° | 43875 |
| 40° | 23129 |
| 45° | 12528 |
| 50° | 6686 |
| 55° | 4396 |
| 60° | 4035 |
| 65° | 4203 |
| 70° | 3719 |
| 75° | 2965 |
| 80° | 2904 |
| 85° | 3019 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12528 cd/sqm



TEST NUMBER: P1265407
 CATALOG NUMBER: P3AS17R309730DE010 E3DL1LI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 277.6 | 22.7 |
| 10°-20° | 493.5 | 40.4 |
| 20°-30° | 285.2 | 23.3 |
| 30°-40° | 108.2 | 8.9 |
| 40°-50° | 33.2 | 2.7 |
| 50°-60° | 11.2 | 0.9 |
| 60°-70° | 7.6 | 0.6 |
| 70°-80° | 4.1 | 0.3 |
| 80°-90° | 1.3 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1056.4 | 86.4 |
| 0°-40° | 1164.7 | 95.3 |
| 0°-60° | 1209.1 | 98.9 |
| 0°-90° | 1222.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1222.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 3252 | |
| 5° | 3083 | 278 |
| 15° | 1814 | 494 |
| 25° | 600 | 285 |
| 35° | 164 | 108 |
| 45° | 40 | 33 |
| 55° | 12 | 11 |
| 65° | 8 | 8 |
| 75° | 4 | 4 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1265407
CATALOG NUMBER: P3AS17R309730DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 3251.9 |
| 1° | 3249.6 |
| 2° | 3229.9 |
| 3° | 3193.0 |
| 4° | 3146.8 |
| 5° | 3083.3 |
| 6° | 3002.5 |
| 7° | 2912.5 |
| 8° | 2812.1 |
| 9° | 2692.0 |
| 10° | 2563.9 |
| 11° | 2425.3 |
| 12° | 2278.7 |
| 13° | 2125.2 |
| 14° | 1969.4 |
| 15° | 1813.5 |
| 17.5° | 1430.3 |
| 20° | 1094.4 |
| 22.5° | 811.5 |
| 25° | 600.3 |
| 27.5° | 436.4 |
| 30° | 318.6 |
| 32.5° | 229.7 |
| 35° | 163.9 |
| 37.5° | 114.3 |
| 40° | 80.8 |
| 42.5° | 56.6 |
| 45° | 40.4 |
| 47.5° | 27.7 |
| 50° | 19.6 |
| 52.5° | 13.9 |
| 55° | 11.5 |
| 57.5° | 10.4 |
| 60° | 9.2 |
| 62.5° | 8.1 |
| 65° | 8.1 |
| 67.5° | 6.9 |
| 70° | 5.8 |
| 72.5° | 4.6 |
| 75° | 3.5 |
| 77.5° | 3.5 |
| 80° | 2.3 |
| 82.5° | 2.3 |
| 85° | 1.2 |
| 87.5° | 0.0 |



TEST NUMBER: P1265407
CATALOG NUMBER: P3AS17R309730DE010 E3DL1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)