

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1265536

Luminaire Tested: P3AS17R509730DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1265536
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R509730DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R50 optic, 3000K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 852.0 lumens
Efficiency: N/A
Efficacy: 40.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1265536

CATALOG NUMBER: P3AS17R509730DE010 E3DLP1WMH

Luminous Intensity Polar Plot

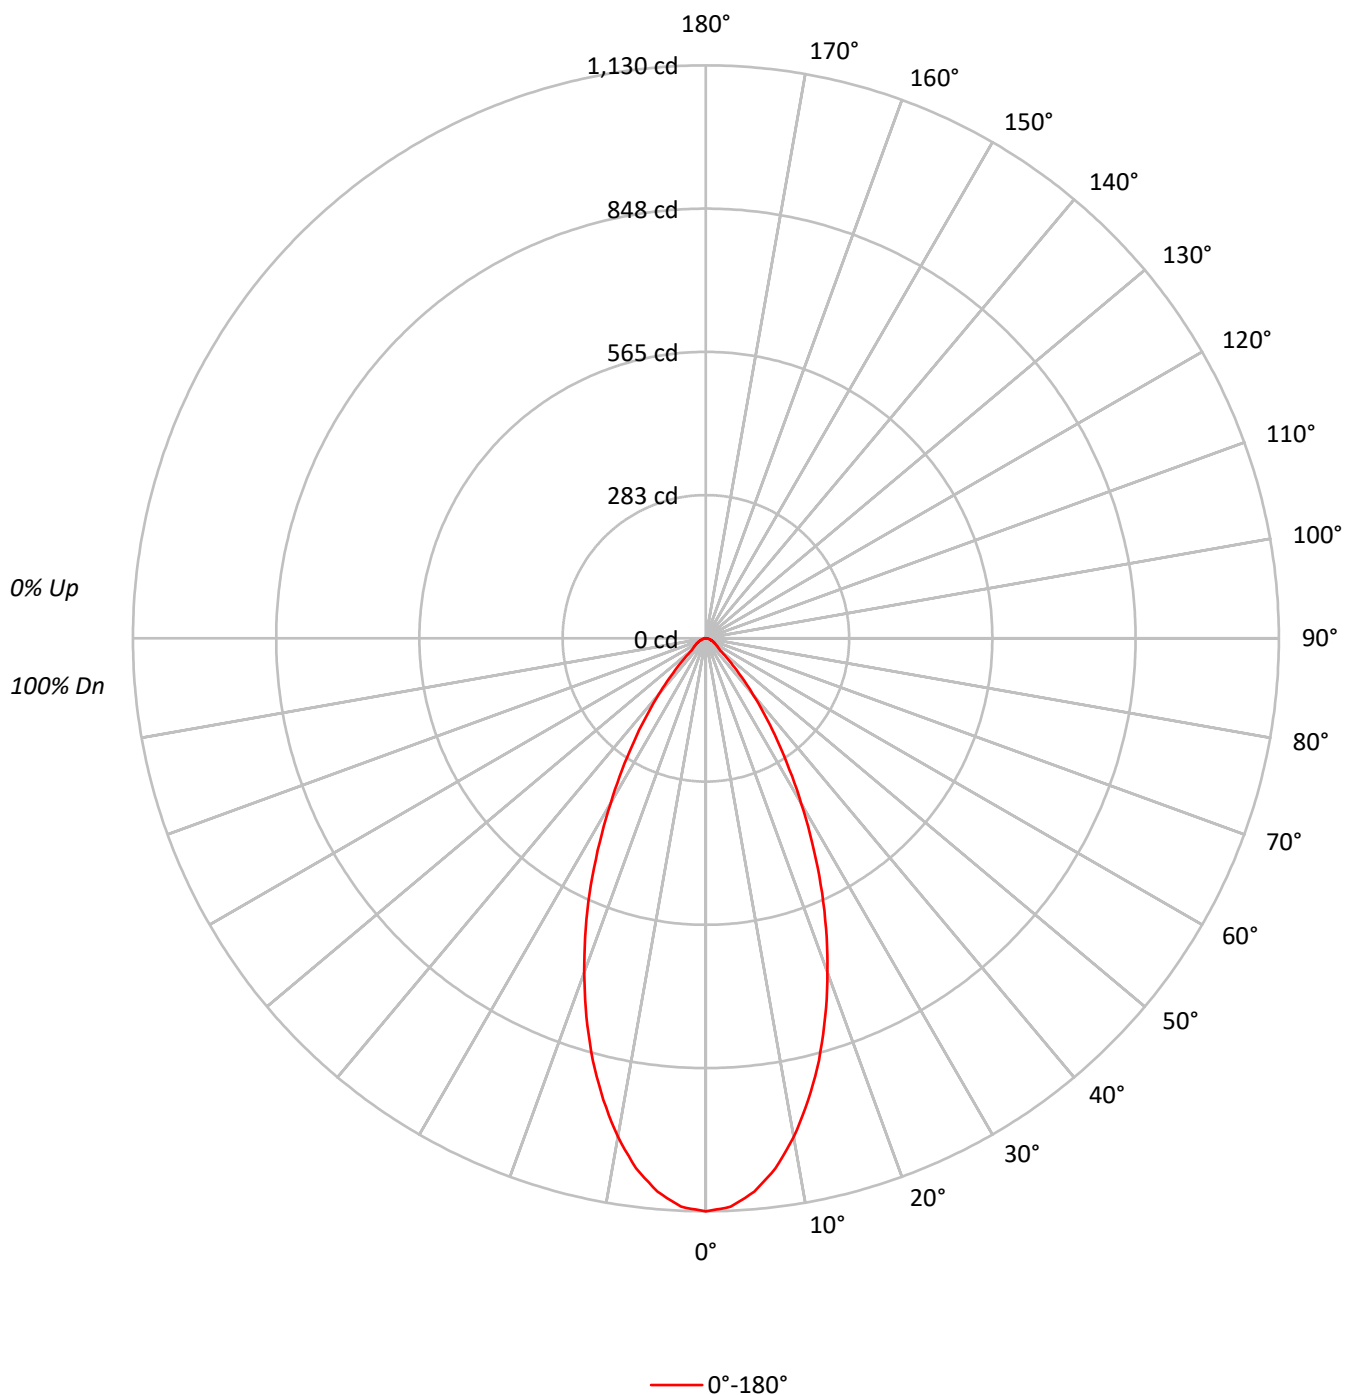



TEST NUMBER: P1265536

CATALOG NUMBER: P3AS17R509730DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		85
3	101	95	89	85	99	93	88	85	91	87	83		88	85	82		79
4	96	88	82	78	94	87	82	78	85	80	77		83	79	76		73
5	91	83	76	72	90	82	76	72	80	75	71		78	74	70		68
6	87	77	71	67	85	77	71	67	75	70	66		74	69	66		64
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		60
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		56
9	75	65	59	55	74	64	59	55	63	58	55		63	58	54		53
10	71	61	56	52	70	61	55	52	60	55	51		59	55	51		50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	247809
5°	241140
10°	222352
15°	195552
20°	163604
25°	129733
30°	95179
35°	65451
40°	41592
45°	23258
50°	12588
55°	10590
60°	9122
65°	8354
70°	7373
75°	6863
80°	5809
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23258 cd/sqm

TEST NUMBER: P1265536

CATALOG NUMBER: P3AS17R509730DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.5	11.9
10°-20°	238.6	28.0
20°-30°	244.0	28.6
30°-40°	154.7	18.2
40°-50°	61.6	7.2
50°-60°	25.0	2.9
60°-70°	16.0	1.9
70°-80°	8.2	1.0
80°-90°	2.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	584.1	68.6
0°-40°	738.8	86.7
0°-60°	825.3	96.9
0°-90°	852.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	852.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1130	
5°	1096	101
15°	861	239
25°	536	244
35°	244	155
45°	75	62
55°	28	25
65°	16	16
75°	8	8
85°	2	3
90°	0	

TEST NUMBER: P1265536

CATALOG NUMBER: P3AS17R509730DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1130.1
2.5°	1122.0
5°	1095.5
7.5°	1054.0
10°	998.6
12.5°	932.9
15°	861.4
17.5°	783.0
20°	701.1
22.5°	619.2
25°	536.2
27.5°	453.2
30°	375.9
32.5°	306.7
35°	244.5
37.5°	191.4
40°	145.3
42.5°	107.2
45°	75.0
47.5°	50.7
50°	36.9
52.5°	31.1
55°	27.7
57.5°	24.2
60°	20.8
62.5°	18.5
65°	16.1
67.5°	13.8
70°	11.5
72.5°	9.2
75°	8.1
77.5°	5.8
80°	4.6
82.5°	3.5
85°	2.3
87.5°	1.2
90°	0.0

(END OF REPORT)