

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266130

Luminaire Tested: P3AS02R129735DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266130
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R129735DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R12 optic, 3500K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 178.0 lumens
Efficiency: N/A
Efficacy: 48.1 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266130

CATALOG NUMBER: P3AS02R129735DE010 E3DLD1WMH

Luminous Intensity Polar Plot

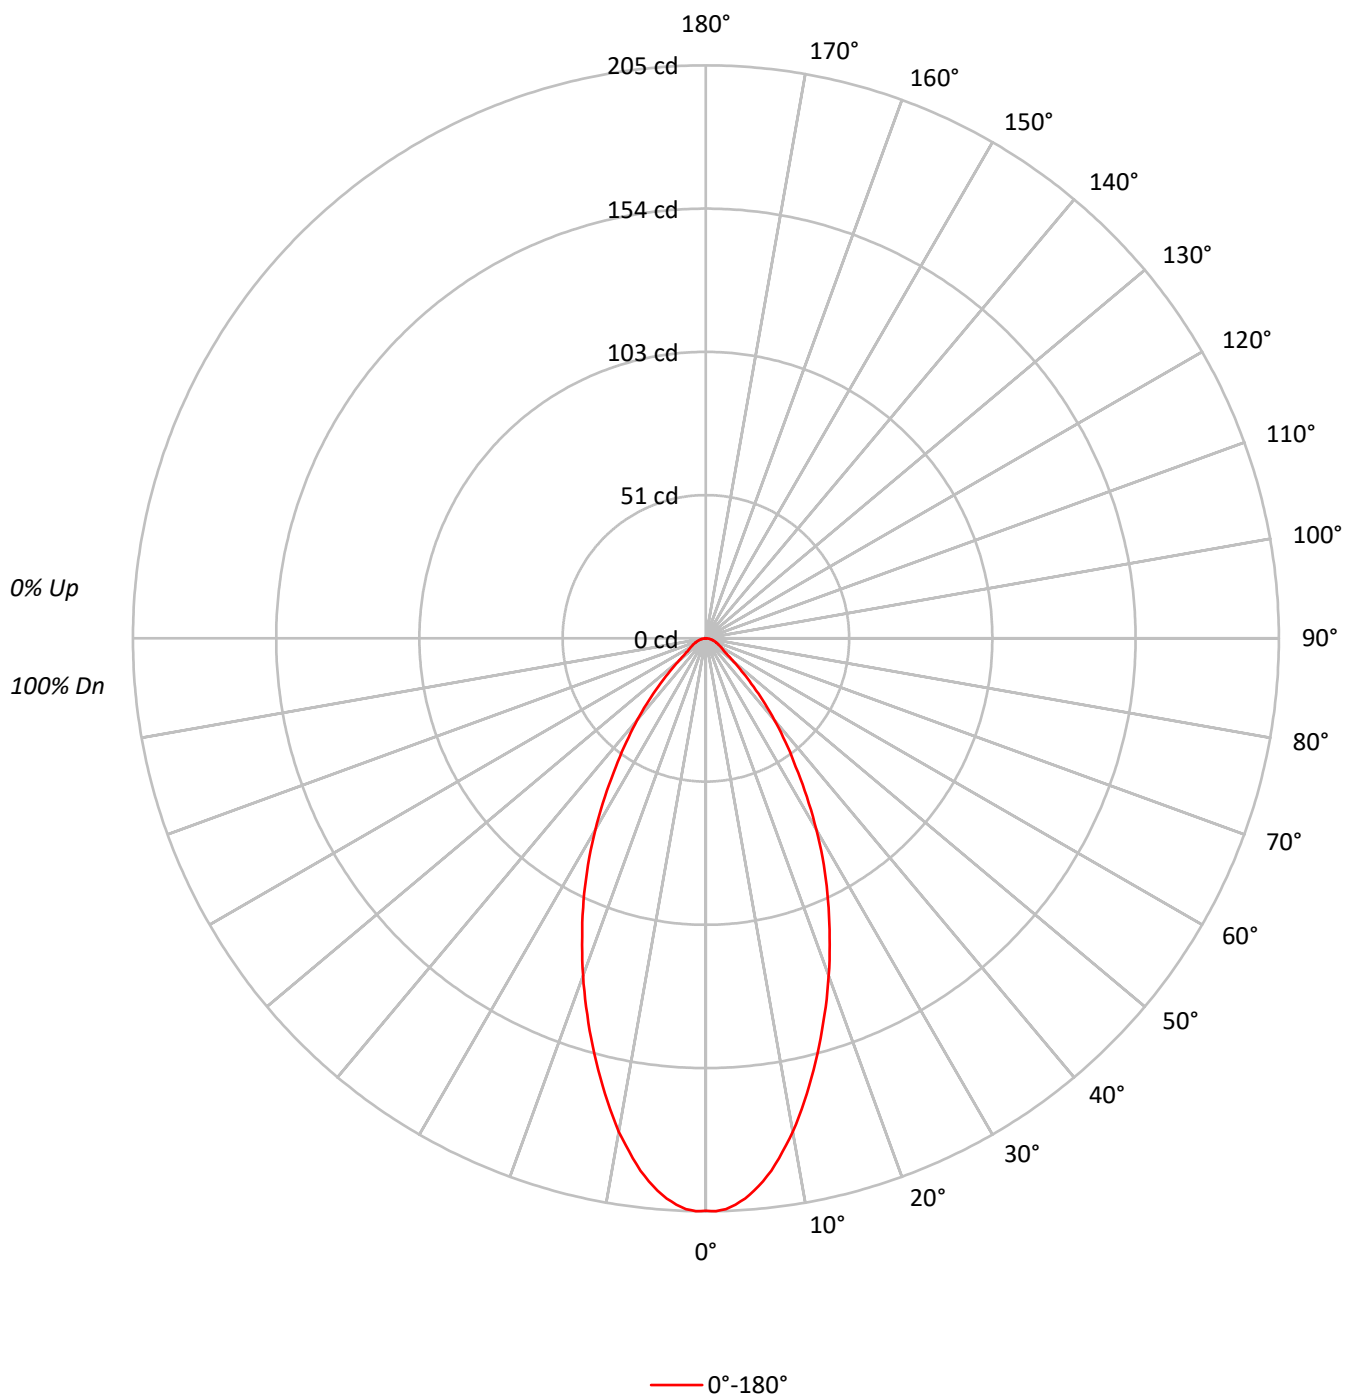

TEST NUMBER: P1266130

CATALOG NUMBER: P3AS02R129735DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	69	63	58	78	69	63	58	67	62	58		66	61	57		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	44909
5°	43671
10°	39924
15°	34960
20°	29986
25°	25042
30°	20028
35°	15018
40°	10906
45°	7133
50°	4469
55°	3020
60°	2675
65°	2439
70°	2308
75°	2118
80°	2020
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7133 cd/sqm

TEST NUMBER: P1266130

CATALOG NUMBER: P3AS02R129735DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	18.3	10.3
10°-20°	42.9	24.1
20°-30°	47.3	26.6
30°-40°	35.4	19.9
40°-50°	18.4	10.3
50°-60°	7.6	4.3
60°-70°	4.7	2.6
70°-80°	2.6	1.5
80°-90°	0.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	108.5	61.0
0°-40°	143.9	80.9
0°-60°	169.9	95.4
0°-90°	178.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	178.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	205	
5°	198	18
15°	154	43
25°	104	47
35°	56	35
45°	23	18
55°	8	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1266130

CATALOG NUMBER: P3AS02R129735DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	204.8
1°	205.0
2°	204.3
3°	202.9
4°	200.9
5°	198.4
6°	195.3
7°	191.9
8°	187.8
9°	183.6
10°	179.3
12.5°	166.9
15°	154.0
17.5°	141.2
20°	128.5
22.5°	115.7
25°	103.5
27.5°	91.3
30°	79.1
32.5°	67.2
35°	56.1
37.5°	46.7
40°	38.1
42.5°	30.2
45°	23.0
47.5°	17.4
50°	13.1
52.5°	9.7
55°	7.9
57.5°	7.0
60°	6.1
62.5°	5.4
65°	4.7
67.5°	4.1
70°	3.6
72.5°	2.9
75°	2.5
77.5°	2.0
80°	1.6
82.5°	1.1
85°	0.7
87.5°	0.2
90°	0.0

(END OF REPORT)