

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266133

Luminaire Tested: P3AS02R129735DE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266133
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R129735DE010 E3DLP1MW
Description: 3in Adjustable LED luminaire with, R12 optic, 3500K CCT AND, 97CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 139.0 lumens
Efficiency: N/A
Efficacy: 37.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266133
CATALOG NUMBER: P3AS02R129735DE010 E3DLP1MW

Luminous Intensity Polar Plot

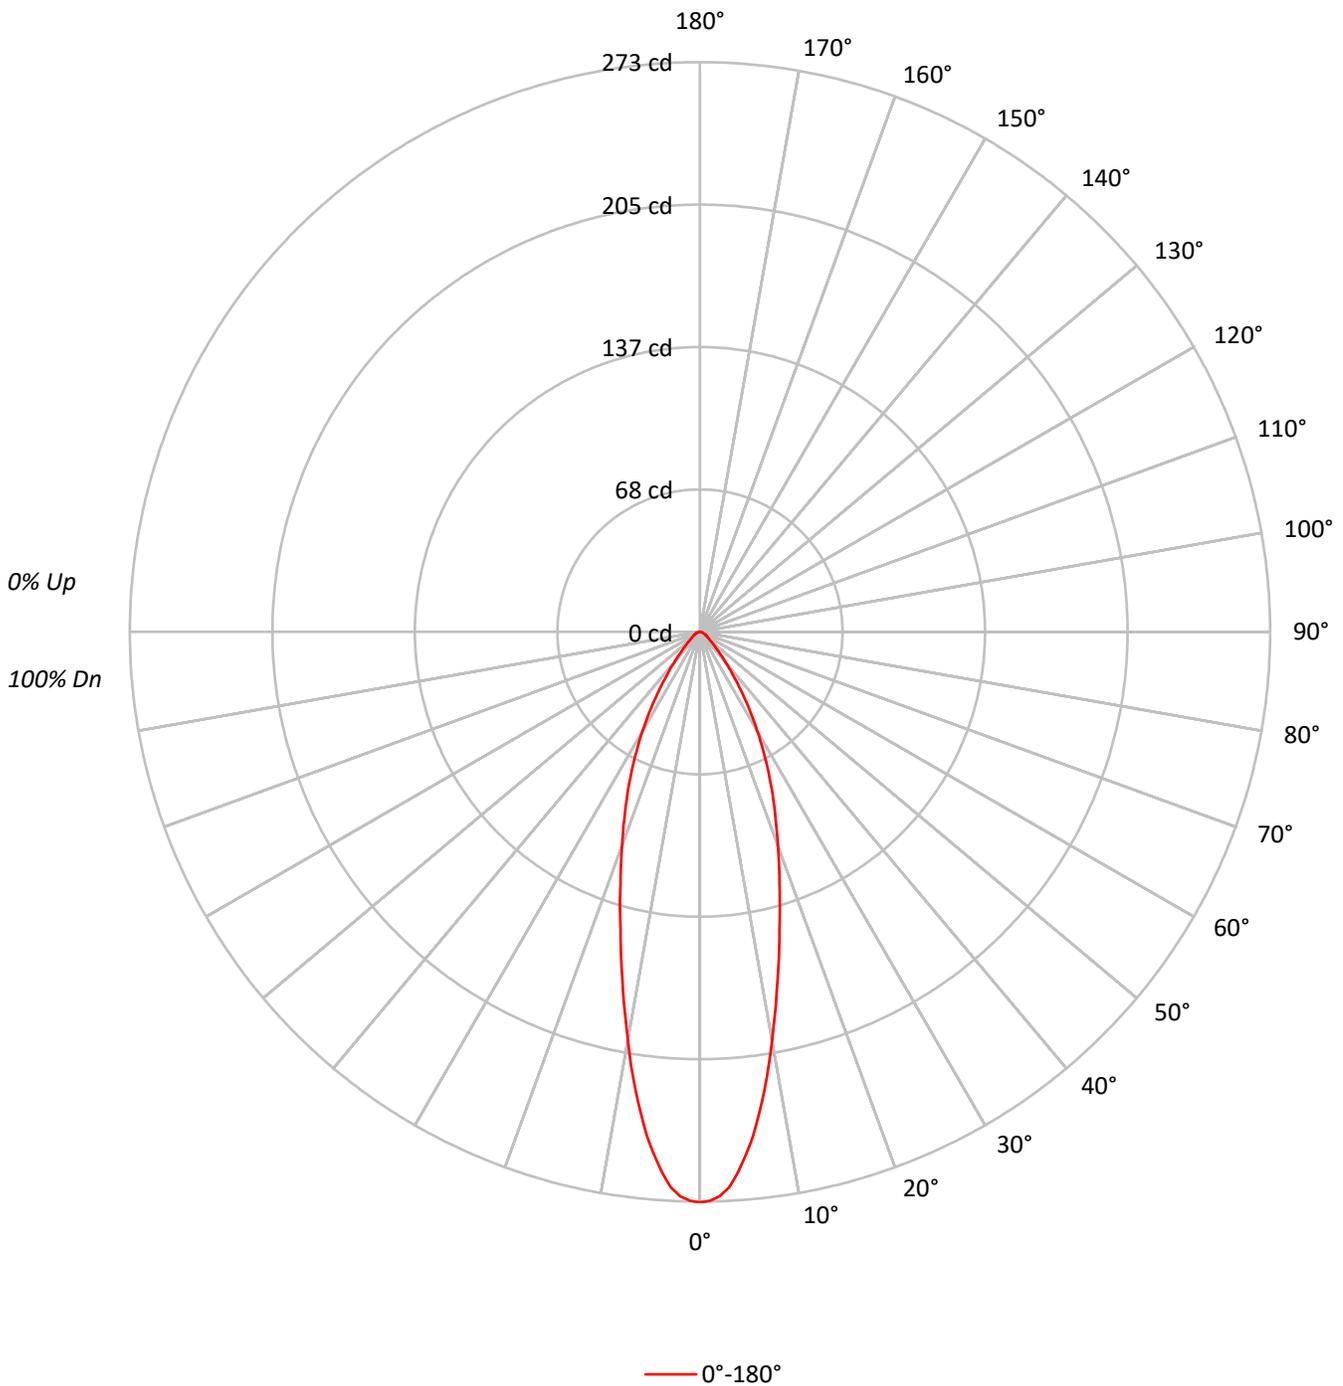



TEST NUMBER: P1266133
 CATALOG NUMBER: P3AS02R129735DE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86	86	86	86
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80	80	80	80
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75	75	75	75
5	93	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66	66	66	66
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62	62	62	62
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59	59	59	59
9	77	68	62	58	76	67	62	58	66	61	58	65	61	57	64	60	57	56	56	56	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	59929
5°	55404
10°	44221
15°	33417
20°	25436
25°	19380
30°	13901
35°	9075
40°	5553
45°	3349
50°	2217
55°	1720
60°	1491
65°	1297
70°	1154
75°	1186
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3349 cd/sqm



TEST NUMBER: P1266133
 CATALOG NUMBER: P3AS02R129735DE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.3	16.0
10°-20°	41.1	29.6
20°-30°	36.6	26.3
30°-40°	21.7	15.6
40°-50°	8.9	6.4
50°-60°	4.2	3.0
60°-70°	2.5	1.8
70°-80°	1.4	1.0
80°-90°	0.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	100.0	72.0
0°-40°	121.7	87.6
0°-60°	134.8	96.9
0°-90°	139.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	139.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	273	
5°	252	22
15°	147	41
25°	80	37
35°	34	22
45°	11	9
55°	4	4
65°	2	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1266133
CATALOG NUMBER: P3AS02R129735DE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	273.3
1°	272.7
2°	270.6
3°	266.6
4°	259.8
5°	251.7
6°	242.9
7°	232.5
8°	221.7
9°	210.6
10°	198.6
12.5°	171.3
15°	147.2
17.5°	126.4
20°	109.0
22.5°	93.7
25°	80.1
27.5°	67.0
30°	54.9
32.5°	43.8
35°	33.9
37.5°	26.0
40°	19.4
42.5°	14.4
45°	10.8
47.5°	8.4
50°	6.5
52.5°	5.4
55°	4.5
57.5°	3.8
60°	3.4
62.5°	2.9
65°	2.5
67.5°	2.3
70°	1.8
72.5°	1.6
75°	1.4
77.5°	0.9
80°	0.7
82.5°	0.5
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)