

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266355

Luminaire Tested: P3AS02R509735DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266355
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R509735DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R50 optic, 3500K CCT AND, 97CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 255.0 lumens
Efficiency: N/A
Efficacy: 70.8 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266355

CATALOG NUMBER: P3AS02R509735DE010 E3DL1LI

Luminous Intensity Polar Plot

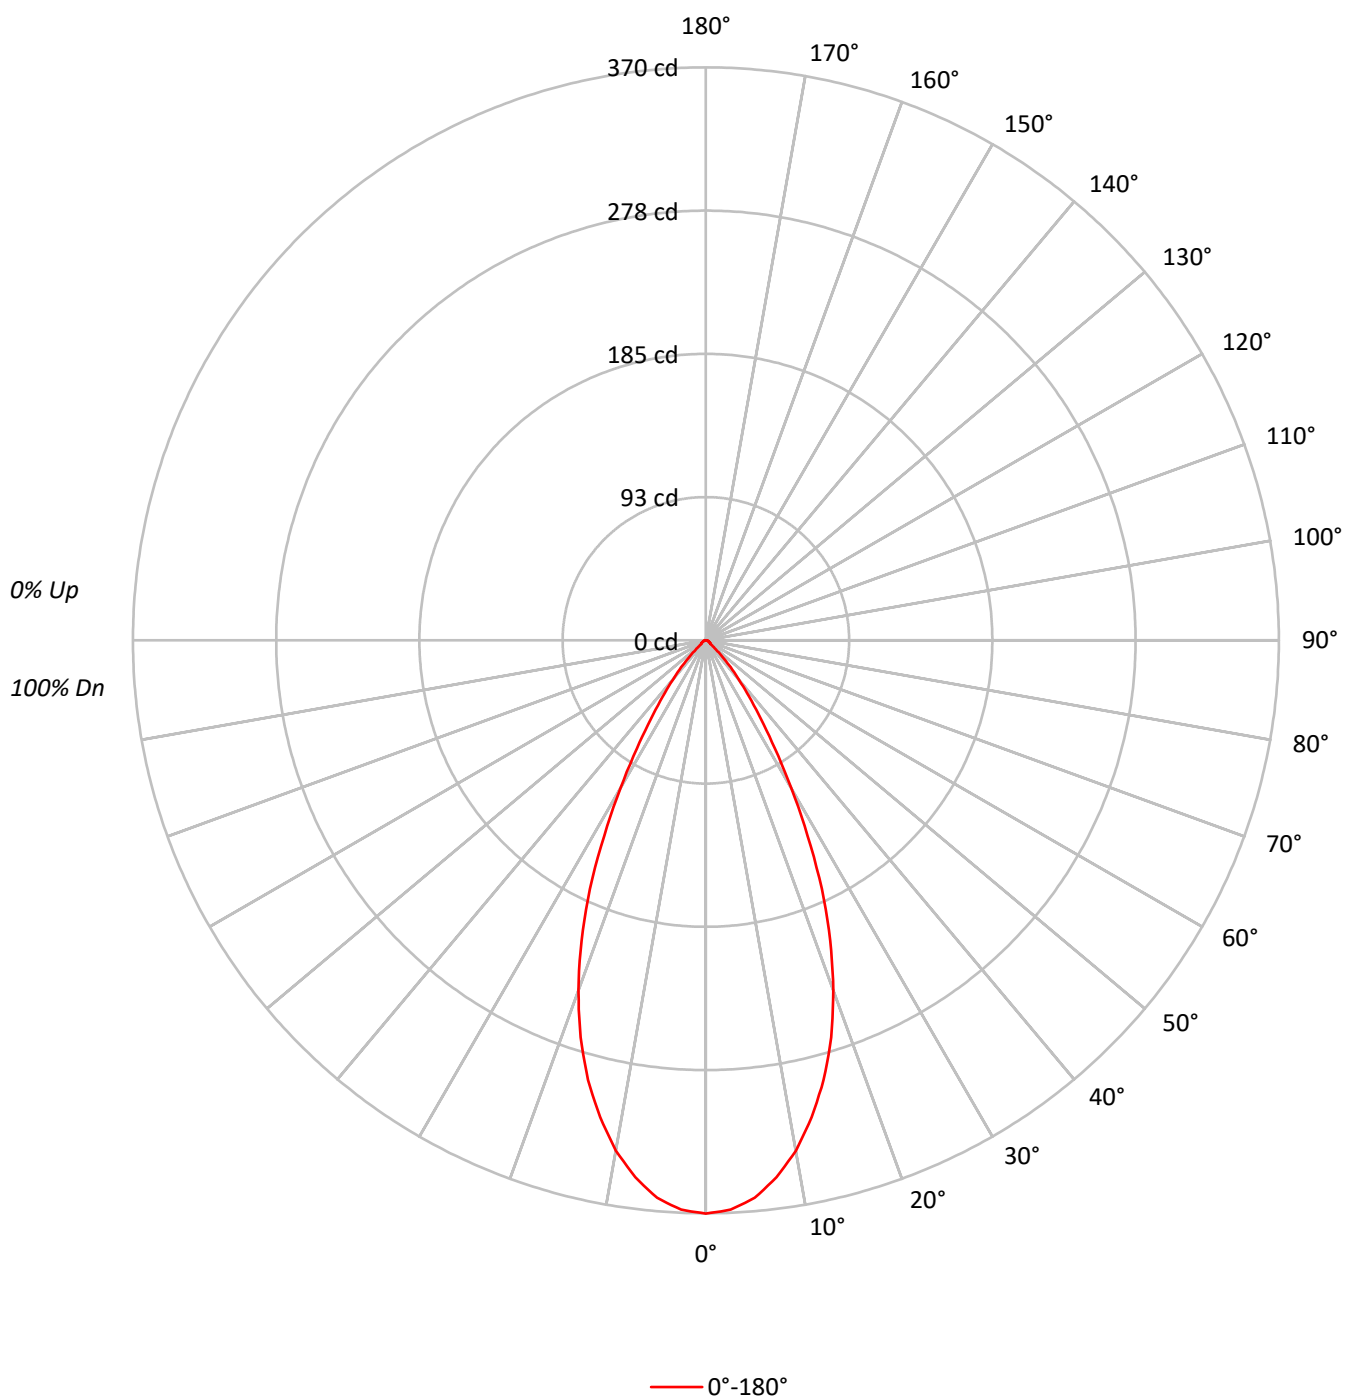

TEST NUMBER: P1266355

CATALOG NUMBER: P3AS02R509735DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	102	98	95		98	95	93		95	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	84		88	85	83
4	98	91	85	81		96	90	85	81		87	83	80		85	82	79		84	80	78
5	93	85	80	75		92	84	79	75		83	78	74		81	77	74		79	76	73
6	89	80	75	71		88	80	74	70		78	73	70		77	73	69		75	72	69
7	85	76	70	66		84	75	70	66		74	69	66		73	69	65		72	68	65
8	81	72	66	62		80	71	66	62		70	65	62		69	65	62		68	64	61
9	78	68	63	59		76	68	62	59		67	62	59		66	62	58		65	61	58
10	74	65	59	56		73	65	59	56		64	59	55		63	58	55		62	58	55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	81178
5°	79551
10°	74503
15°	66697
20°	56145
25°	42849
30°	27852
35°	16517
40°	9532
45°	4776
50°	1774
55°	1376
60°	1272
65°	1193
70°	1154
75°	1186
80°	1137
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4776 cd/sqm

TEST NUMBER: P1266355

CATALOG NUMBER: P3AS02R509735DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.6	13.2
10°-20°	81.3	31.9
20°-30°	79.7	31.3
30°-40°	40.2	15.8
40°-50°	12.7	5.0
50°-60°	3.3	1.3
60°-70°	2.3	0.9
70°-80°	1.4	0.6
80°-90°	0.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	194.6	76.3
0°-40°	234.8	92.1
0°-60°	250.8	98.3
0°-90°	255.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	255.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	370	
5°	361	34
15°	294	81
25°	177	80
35°	62	40
45°	15	13
55°	4	3
65°	2	2
75°	1	1
85°	0	1
90°	0	

TEST NUMBER: P1266355

CATALOG NUMBER: P3AS02R509735DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	370.2
2.5°	368.0
5°	361.4
7.5°	349.6
10°	334.6
12.5°	315.4
15°	293.8
17.5°	268.9
20°	240.6
22.5°	209.9
25°	177.1
27.5°	142.2
30°	110.0
32.5°	82.8
35°	61.7
37.5°	45.6
40°	33.3
42.5°	23.6
45°	15.4
47.5°	8.8
50°	5.2
52.5°	3.9
55°	3.6
57.5°	3.2
60°	2.9
62.5°	2.7
65°	2.3
67.5°	2.0
70°	1.8
72.5°	1.6
75°	1.4
77.5°	1.1
80°	0.9
82.5°	0.7
85°	0.5
87.5°	0.2
90°	0.0

(END OF REPORT)