

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266549

Luminaire Tested: P3AS05R159735DE010 E3CB1MB

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1266549  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R159735DE010 E3CB1MB  
Description: 3in Adjustable LED luminaire with, R15 optic, 3500K CCT AND, 97CRI , E3CB1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 590.0 lumens  
Efficiency: N/A  
Efficacy: 81.9 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1266549  
CATALOG NUMBER: P3AS05R159735DE010 E3CB1MB

### Luminous Intensity Polar Plot

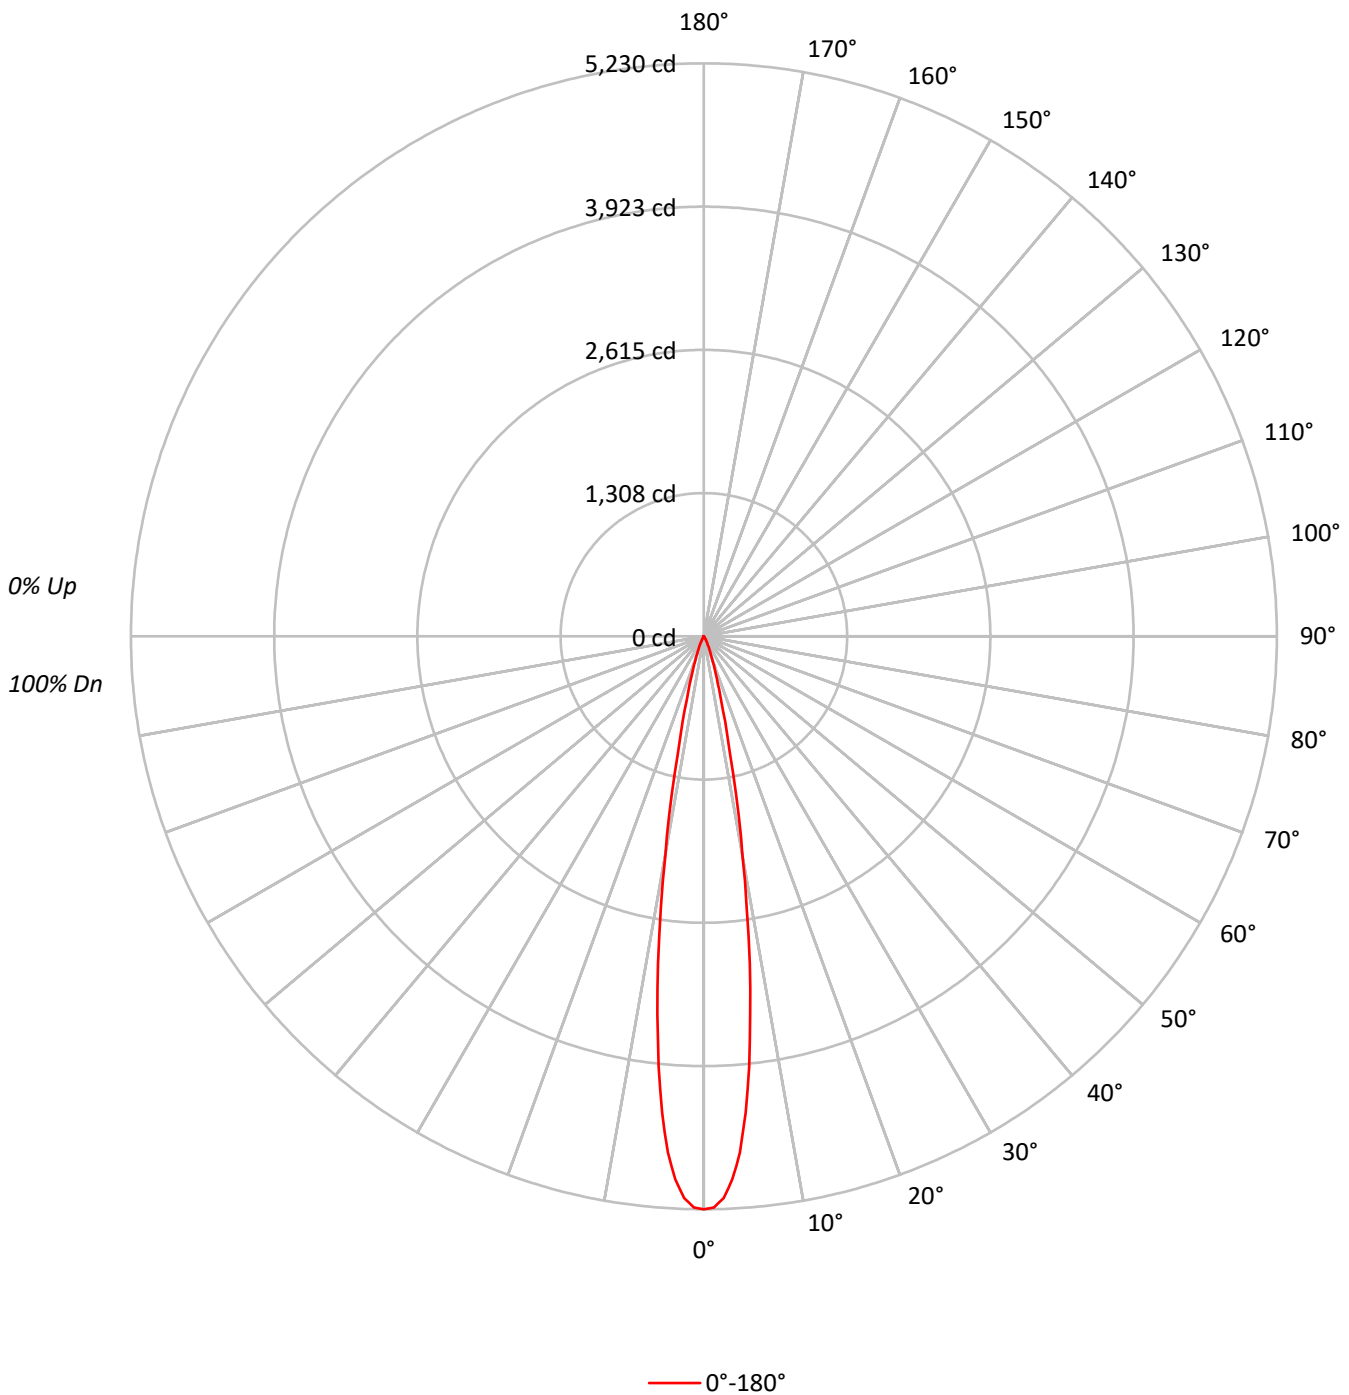



TEST NUMBER: P1266549  
 CATALOG NUMBER: P3AS05R159735DE010 E3CB1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98	98	98	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	97	95	94	94	94	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91	91	91	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89	89	89	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88	88	88	88
8	99	94	90	88	98	93	90	88	92	90	88	92	89	87	91	89	87	86	86	86	86
9	97	92	89	87	97	92	89	86	91	88	86	90	88	86	90	87	86	85	85	85	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84	84	84	84

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1146816
5°	961147
10°	452742
15°	136505
20°	50498
25°	19646
30°	7318
35°	2249
40°	802
45°	434
50°	307
55°	344
60°	395
65°	259
70°	321
75°	424
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 434 cd/sqm



TEST NUMBER: P1266549  
 CATALOG NUMBER: P3AS05R159735DE010 E3CB1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	337.6	57.2
10°-20°	200.7	34.0
20°-30°	42.2	7.1
30°-40°	6.8	1.2
40°-50°	1.2	0.2
50°-60°	0.8	0.1
60°-70°	0.5	0.1
70°-80°	0.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	580.4	98.4
0°-40°	587.2	99.5
0°-60°	589.2	99.9
0°-90°	590.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	590.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5230	
5°	4366	338
15°	601	201
25°	81	42
35°	8	7
45°	1	1
55°	1	1
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1266549  
CATALOG NUMBER: P3AS05R159735DE010 E3CB1MB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5229.9
1°	5213.6
2°	5130.6
3°	4964.5
4°	4721.0
5°	4366.5
6°	3950.0
7°	3473.7
8°	3018.9
9°	2503.9
10°	2033.3
12.5°	1097.1
15°	601.3
17.5°	352.2
20°	216.4
22.5°	132.5
25°	81.2
27.5°	49.0
30°	28.9
32.5°	16.3
35°	8.4
37.5°	4.7
40°	2.8
42.5°	1.9
45°	1.4
47.5°	0.9
50°	0.9
52.5°	0.9
55°	0.9
57.5°	0.9
60°	0.9
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)