

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266847

Luminaire Tested: P3AS05R659735DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266847
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659735DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 97CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 556.0 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266847

CATALOG NUMBER: P3AS05R659735DE010 E3D1LI

Luminous Intensity Polar Plot

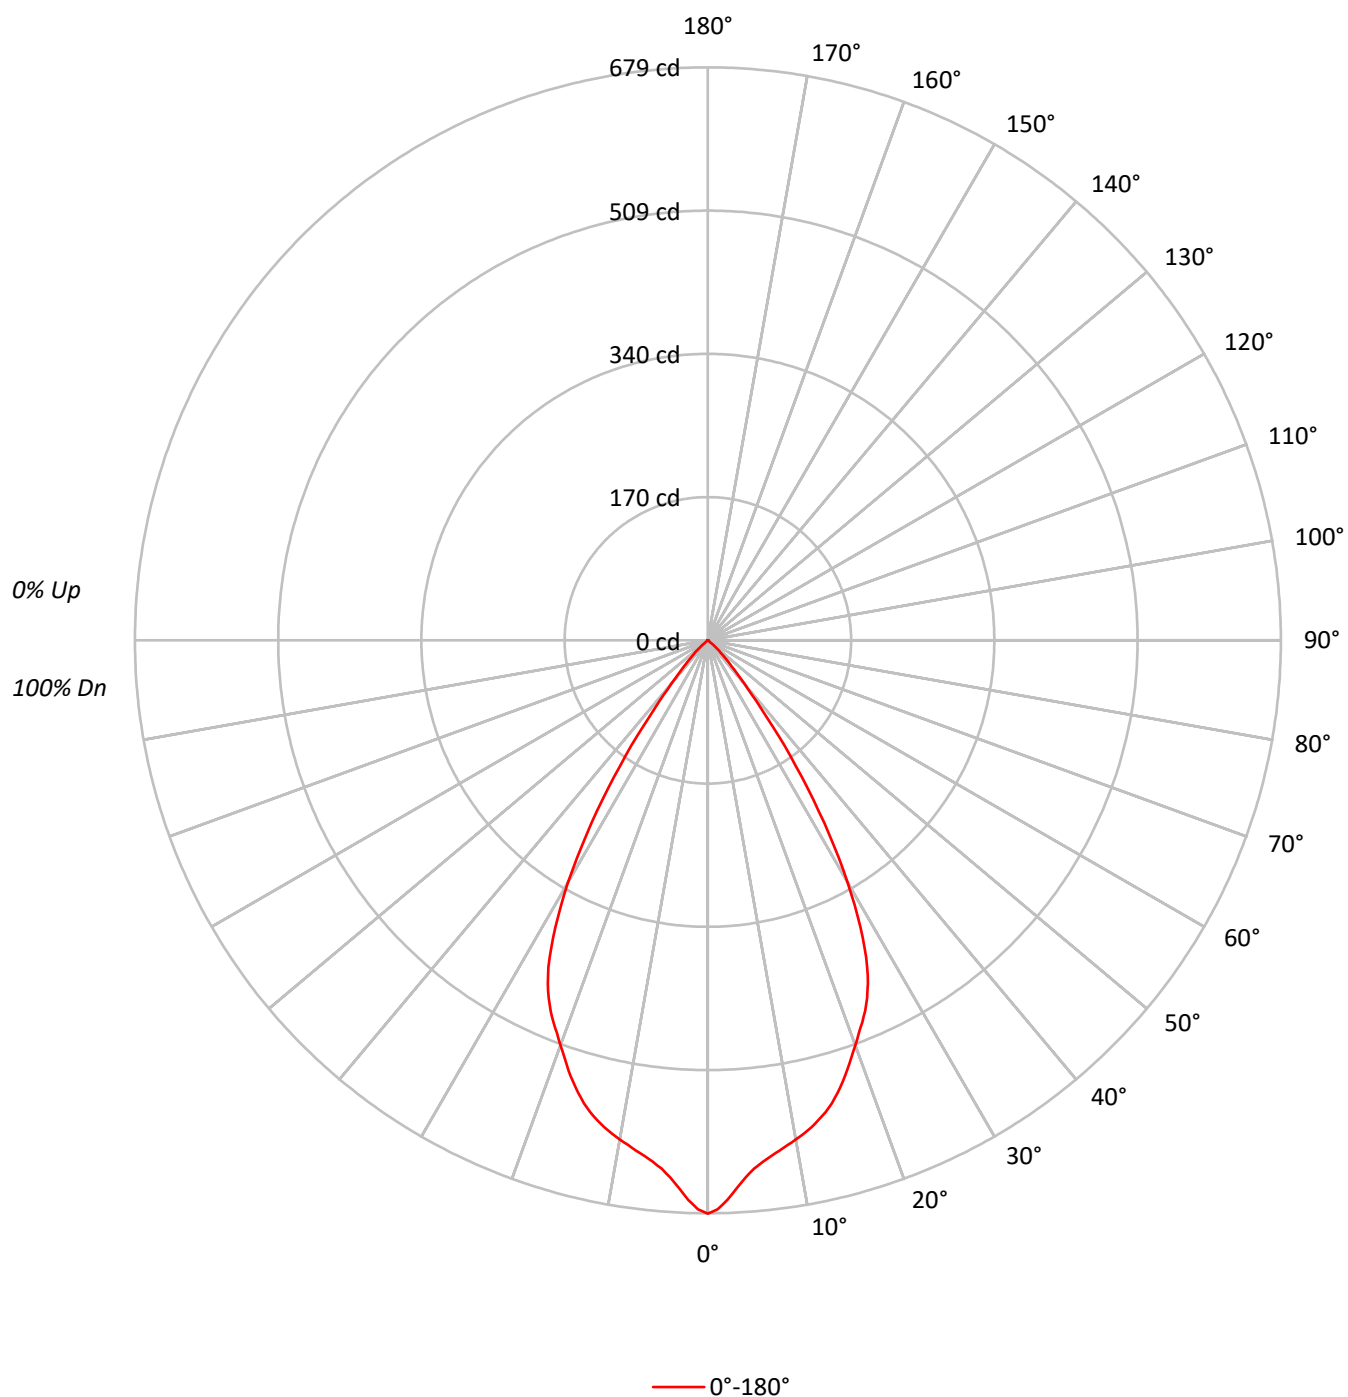

TEST NUMBER: P1266847

CATALOG NUMBER: P3AS05R659735DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	148979
5°	138344
10°	133776
15°	128922
20°	119197
25°	108587
30°	83912
35°	48640
40°	19293
45°	8218
50°	1944
55°	268
60°	219
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8218 cd/sqm

TEST NUMBER: P1266847

CATALOG NUMBER: P3AS05R659735DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.3	10.7
10°-20°	158.2	28.5
20°-30°	200.3	36.0
30°-40°	114.1	20.5
40°-50°	22.6	4.1
50°-60°	1.2	0.2
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	417.8	75.1
0°-40°	531.8	95.7
0°-60°	555.7	99.9
0°-90°	556.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	556.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	679	
5°	628	59
15°	568	158
25°	449	200
35°	182	114
45°	26	23
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1266847

CATALOG NUMBER: P3AS05R659735DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	679.4
1°	674.4
2°	663.4
3°	650.6
4°	638.1
5°	628.5
6°	621.4
7°	615.7
8°	610.6
9°	605.6
10°	600.8
11°	595.5
12°	590.1
13°	583.4
14°	576.4
15°	567.9
16°	557.8
17°	546.9
18°	535.0
19°	522.4
20°	510.8
21°	498.9
22°	488.1
23°	476.9
24°	463.9
25°	448.8
26°	430.8
27°	409.1
28°	384.6
29°	358.6
30°	331.4
31°	301.4
32°	271.7
32.5°	256.4
33°	241.6
34°	211.4
35°	181.7
36°	154.3
37°	127.1
37.5°	113.1
38°	101.9
39°	82.5
40°	67.4
42.5°	41.6
45°	26.5



TEST NUMBER: P1266847

CATALOG NUMBER: P3AS05R659735DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	15.5
50°	5.7
52.5°	1.1
55°	0.7
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)