

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266950

Luminaire Tested: P3AS09R159735DE010 E3DLP1GPH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1266950  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R159735DE010 E3DLP1GPH  
Description: 3in Adjustable LED luminaire with, R15 optic, 3500K CCT AND, 97CRI , E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 206.0 lumens  
Efficiency: N/A  
Efficacy: 18.6 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1266950

CATALOG NUMBER: P3AS09R159735DE010 E3DLP1GPH

### Luminous Intensity Polar Plot

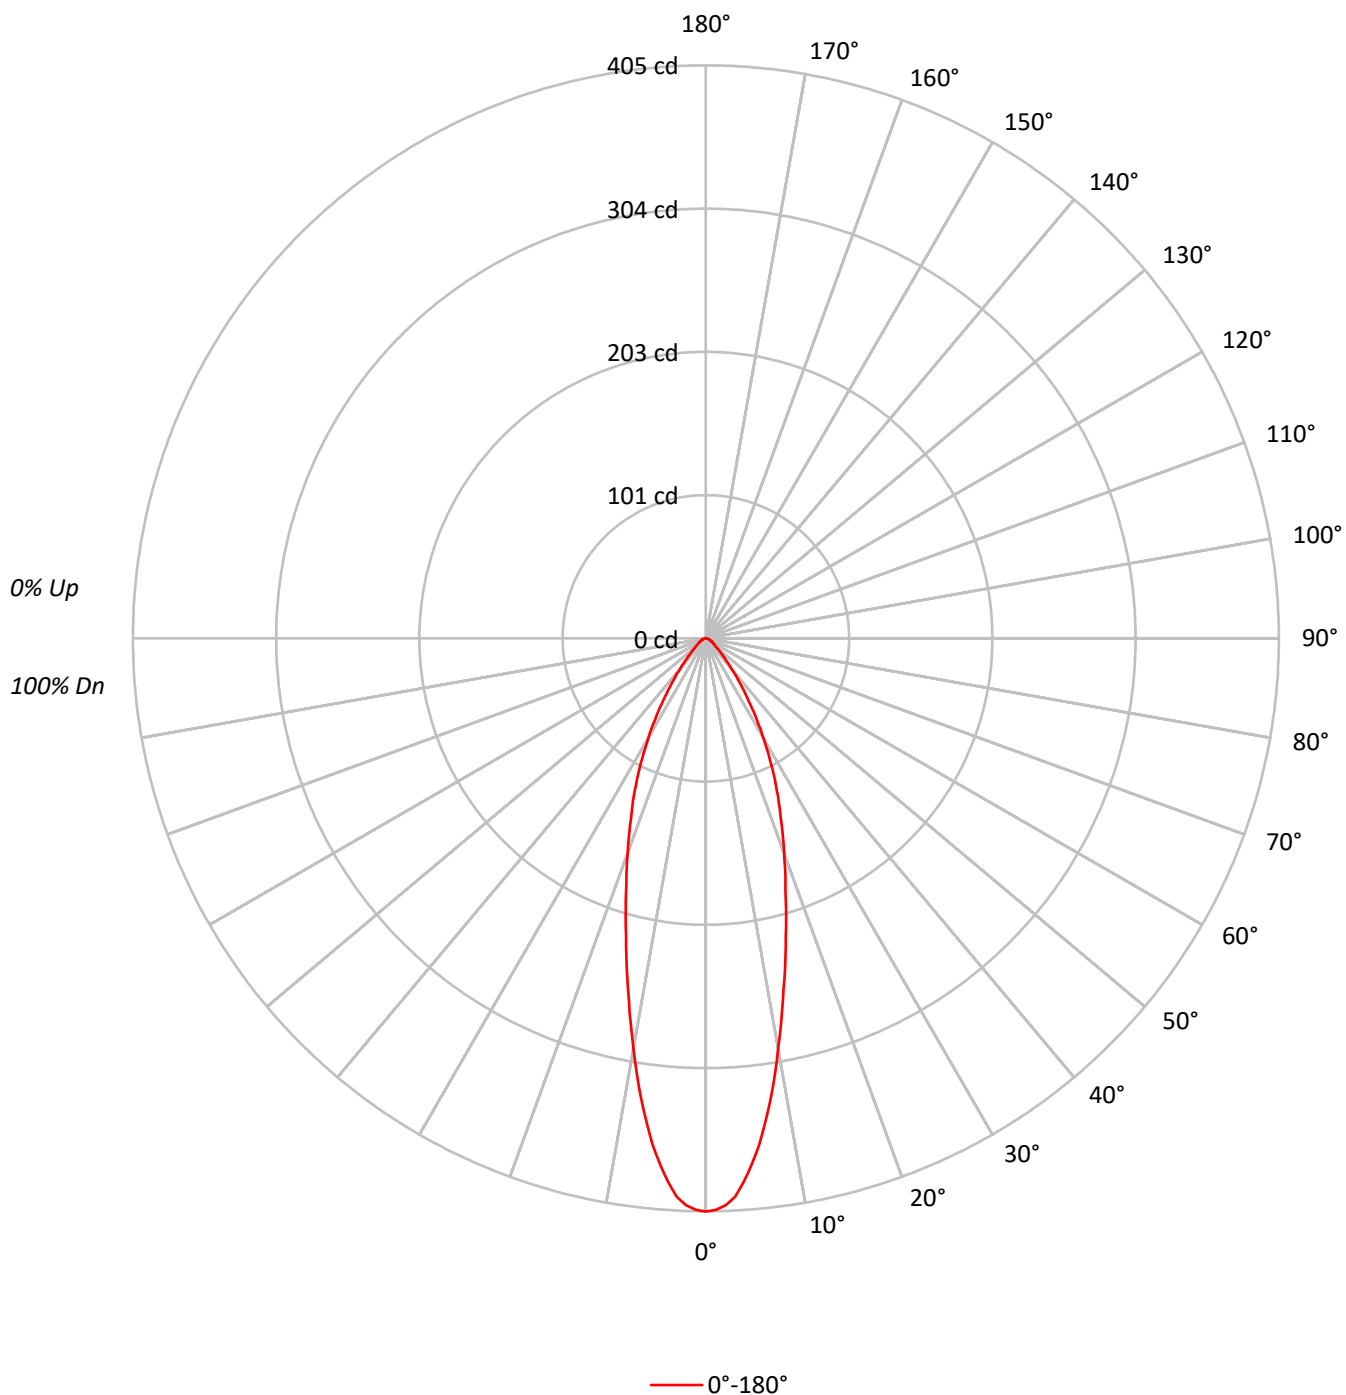

TEST NUMBER: P1266950

CATALOG NUMBER: P3AS09R159735DE010 E3DLP1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 30  |     |     |  |     | 10  |     |  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 113 | 110 | 108 | 106 |  | 111 | 108 | 106 | 104 |  | 104 | 102 | 101 |  | 100 | 99  | 98  |  | 97  | 96  | 95  |
| 2   | 108 | 103 | 98  | 95  |  | 105 | 101 | 97  | 94  |  | 98  | 95  | 92  |  | 95  | 92  | 90  |  | 92  | 90  | 88  |
| 3   | 102 | 96  | 91  | 87  |  | 100 | 94  | 90  | 86  |  | 92  | 88  | 85  |  | 89  | 86  | 83  |  | 87  | 84  | 82  |
| 4   | 97  | 90  | 84  | 80  |  | 95  | 88  | 83  | 79  |  | 86  | 82  | 78  |  | 84  | 81  | 78  |  | 82  | 79  | 77  |
| 5   | 93  | 84  | 78  | 74  |  | 91  | 83  | 78  | 74  |  | 81  | 77  | 73  |  | 80  | 76  | 73  |  | 78  | 75  | 72  |
| 6   | 88  | 79  | 73  | 69  |  | 87  | 79  | 73  | 69  |  | 77  | 72  | 69  |  | 76  | 71  | 68  |  | 74  | 71  | 68  |
| 7   | 84  | 75  | 69  | 65  |  | 83  | 74  | 69  | 65  |  | 73  | 68  | 64  |  | 72  | 67  | 64  |  | 71  | 67  | 64  |
| 8   | 80  | 71  | 65  | 61  |  | 79  | 71  | 65  | 61  |  | 69  | 64  | 61  |  | 68  | 64  | 61  |  | 68  | 63  | 60  |
| 9   | 77  | 68  | 62  | 58  |  | 76  | 67  | 62  | 58  |  | 66  | 61  | 58  |  | 65  | 61  | 57  |  | 64  | 60  | 57  |
| 10  | 74  | 64  | 59  | 55  |  | 73  | 64  | 59  | 55  |  | 63  | 58  | 55  |  | 62  | 58  | 55  |  | 62  | 57  | 54  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 88831 |
| 5°  | 82104 |
| 10° | 65552 |
| 15° | 49512 |
| 20° | 37710 |
| 25° | 28744 |
| 30° | 20585 |
| 35° | 13438 |
| 40° | 8244  |
| 45° | 4993  |
| 50° | 3309  |
| 55° | 2561  |
| 60° | 2193  |
| 65° | 1920  |
| 70° | 1731  |
| 75° | 1694  |
| 80° | 1263  |
| 85° | 755   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 4993 cd/sqm

TEST NUMBER: P1266950

CATALOG NUMBER: P3AS09R159735DE010 E3DLP1GPH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 33.0   | 16.0      |
| 10°-20°   | 61.0   | 29.6      |
| 20°-30°   | 54.3   | 26.4      |
| 30°-40°   | 32.1   | 15.6      |
| 40°-50°   | 13.2   | 6.4       |
| 50°-60°   | 6.2    | 3.0       |
| 60°-70°   | 3.7    | 1.8       |
| 70°-80°   | 2.0    | 1.0       |
| 80°-90°   | 0.5    | 0.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 148.3  | 72.0      |
| 0°-40°    | 180.4  | 87.6      |
| 0°-60°    | 199.8  | 97.0      |
| 0°-90°    | 206.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 206.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 405 |      |
| 5°  | 373 | 33   |
| 15° | 218 | 61   |
| 25° | 119 | 54   |
| 35° | 50  | 32   |
| 45° | 16  | 13   |
| 55° | 7   | 6    |
| 65° | 4   | 4    |
| 75° | 2   | 2    |
| 85° | 0   | 0    |
| 90° | 0   |      |

TEST NUMBER: P1266950

CATALOG NUMBER: P3AS09R159735DE010 E3DLP1GPH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 405.1 |
| 1°    | 404.1 |
| 2°    | 401.1 |
| 3°    | 395.1 |
| 4°    | 385.0 |
| 5°    | 373.0 |
| 6°    | 359.9 |
| 7°    | 344.6 |
| 8°    | 328.5 |
| 9°    | 312.1 |
| 10°   | 294.4 |
| 12.5° | 253.9 |
| 15°   | 218.1 |
| 17.5° | 187.3 |
| 20°   | 161.6 |
| 22.5° | 138.8 |
| 25°   | 118.8 |
| 27.5° | 99.4  |
| 30°   | 81.3  |
| 32.5° | 64.9  |
| 35°   | 50.2  |
| 37.5° | 38.5  |
| 40°   | 28.8  |
| 42.5° | 21.4  |
| 45°   | 16.1  |
| 47.5° | 12.4  |
| 50°   | 9.7   |
| 52.5° | 8.0   |
| 55°   | 6.7   |
| 57.5° | 5.7   |
| 60°   | 5.0   |
| 62.5° | 4.3   |
| 65°   | 3.7   |
| 67.5° | 3.3   |
| 70°   | 2.7   |
| 72.5° | 2.3   |
| 75°   | 2.0   |
| 77.5° | 1.3   |
| 80°   | 1.0   |
| 82.5° | 0.7   |
| 85°   | 0.3   |
| 87.5° | 0.3   |
| 90°   | 0.0   |

(END OF REPORT)