

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1266962

Luminaire Tested: P3AS09R209735DE010 E3CD1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1266962
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R209735DE010 E3CD1MB
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 97CRI , E3CD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 861.1 lumens
Efficiency: N/A
Efficacy: 77.6 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1266962

CATALOG NUMBER: P3AS09R209735DE010 E3CD1MB

Luminous Intensity Polar Plot

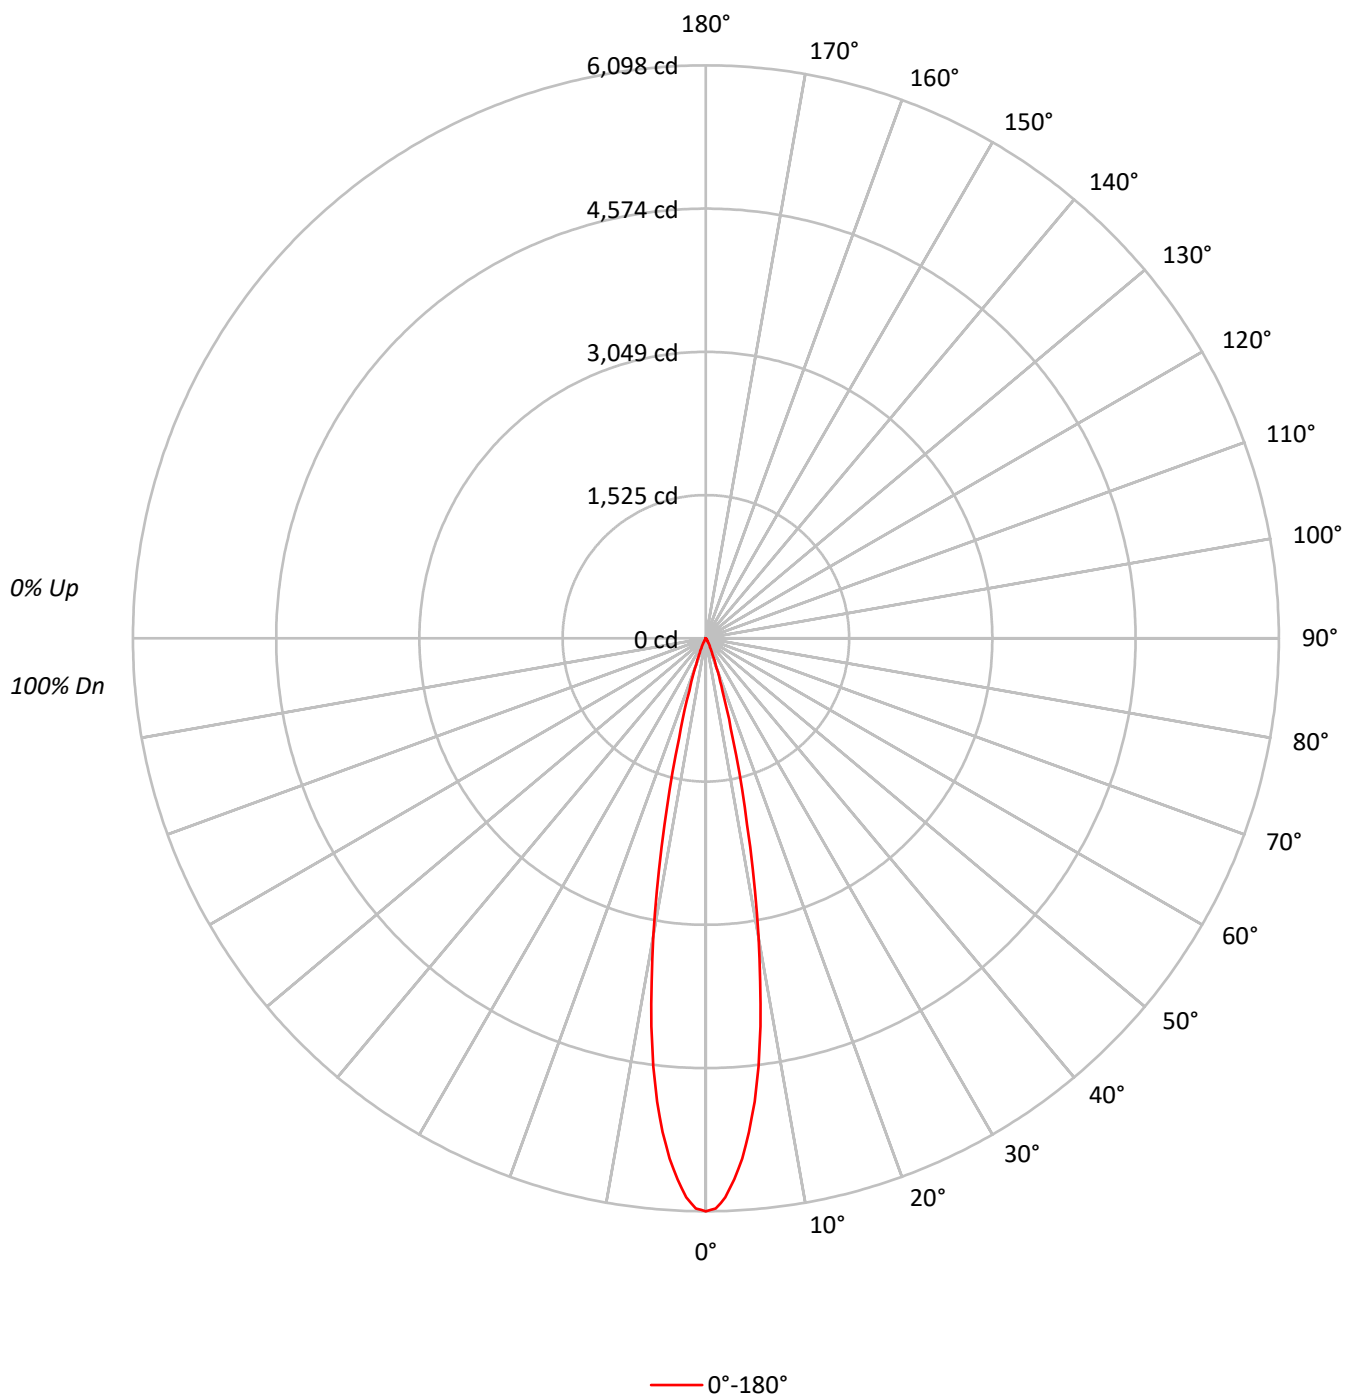

TEST NUMBER: P1266962

CATALOG NUMBER: P3AS09R209735DE010 E3CD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98		
2	112	109	106	104	110	108	105	103	104	103	101	102	100	99	99	98	97	95		
3	109	105	102	100	108	104	101	99	102	99	97	99	98	96	97	96	95	93		
4	107	102	99	96	105	101	98	96	99	97	94	97	95	93	96	94	92	91		
5	104	99	96	93	103	98	95	93	97	94	92	95	93	91	94	92	91	90		
6	102	97	93	91	101	96	93	90	95	92	90	94	91	89	93	90	89	88		
7	100	94	91	88	99	94	91	88	93	90	88	92	89	87	91	89	87	86		
8	98	92	89	86	97	92	89	86	91	88	86	90	88	86	89	87	85	85		
9	96	90	87	85	95	90	87	85	89	86	84	89	86	84	88	86	84	83		
10	94	89	85	83	93	88	85	83	88	85	83	87	84	83	86	84	82	82		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1337239
5°	1160662
10°	717177
15°	249105
20°	76493
25°	27050
30°	10002
35°	4015
40°	2147
45°	837
50°	478
55°	535
60°	614
65°	363
70°	449
75°	593
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 837 cd/sqm

TEST NUMBER: P1266962

CATALOG NUMBER: P3AS09R209735DE010 E3CD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	437.6	50.8
10°-20°	347.2	40.3
20°-30°	60.1	7.0
30°-40°	10.9	1.3
40°-50°	2.5	0.3
50°-60°	1.3	0.1
60°-70°	0.8	0.1
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	845.0	98.1
0°-40°	855.9	99.4
0°-60°	859.7	99.8
0°-90°	861.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	861.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6098	
5°	5273	438
15°	1097	347
25°	112	60
35°	15	11
45°	3	3
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1266962

CATALOG NUMBER: P3AS09R209735DE010 E3CD1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	6098.3
1°	6069.0
2°	5953.1
3°	5767.0
4°	5549.0
5°	5272.9
6°	4956.7
7°	4588.7
8°	4169.6
9°	3698.6
10°	3220.9
12.5°	2031.6
15°	1097.3
17.5°	586.1
20°	327.8
22.5°	187.4
25°	111.8
27.5°	68.2
30°	39.5
32.5°	23.2
35°	15.0
37.5°	10.2
40°	7.5
42.5°	4.8
45°	2.7
47.5°	1.4
50°	1.4
52.5°	1.4
55°	1.4
57.5°	1.4
60°	1.4
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)