

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267021

Luminaire Tested: P3AS09R309735DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267021
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R309735DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 97CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 868.1 lumens
Efficiency: N/A
Efficacy: 78.2 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267021

CATALOG NUMBER: P3AS09R309735DE010 E3CD1MMS

Luminous Intensity Polar Plot

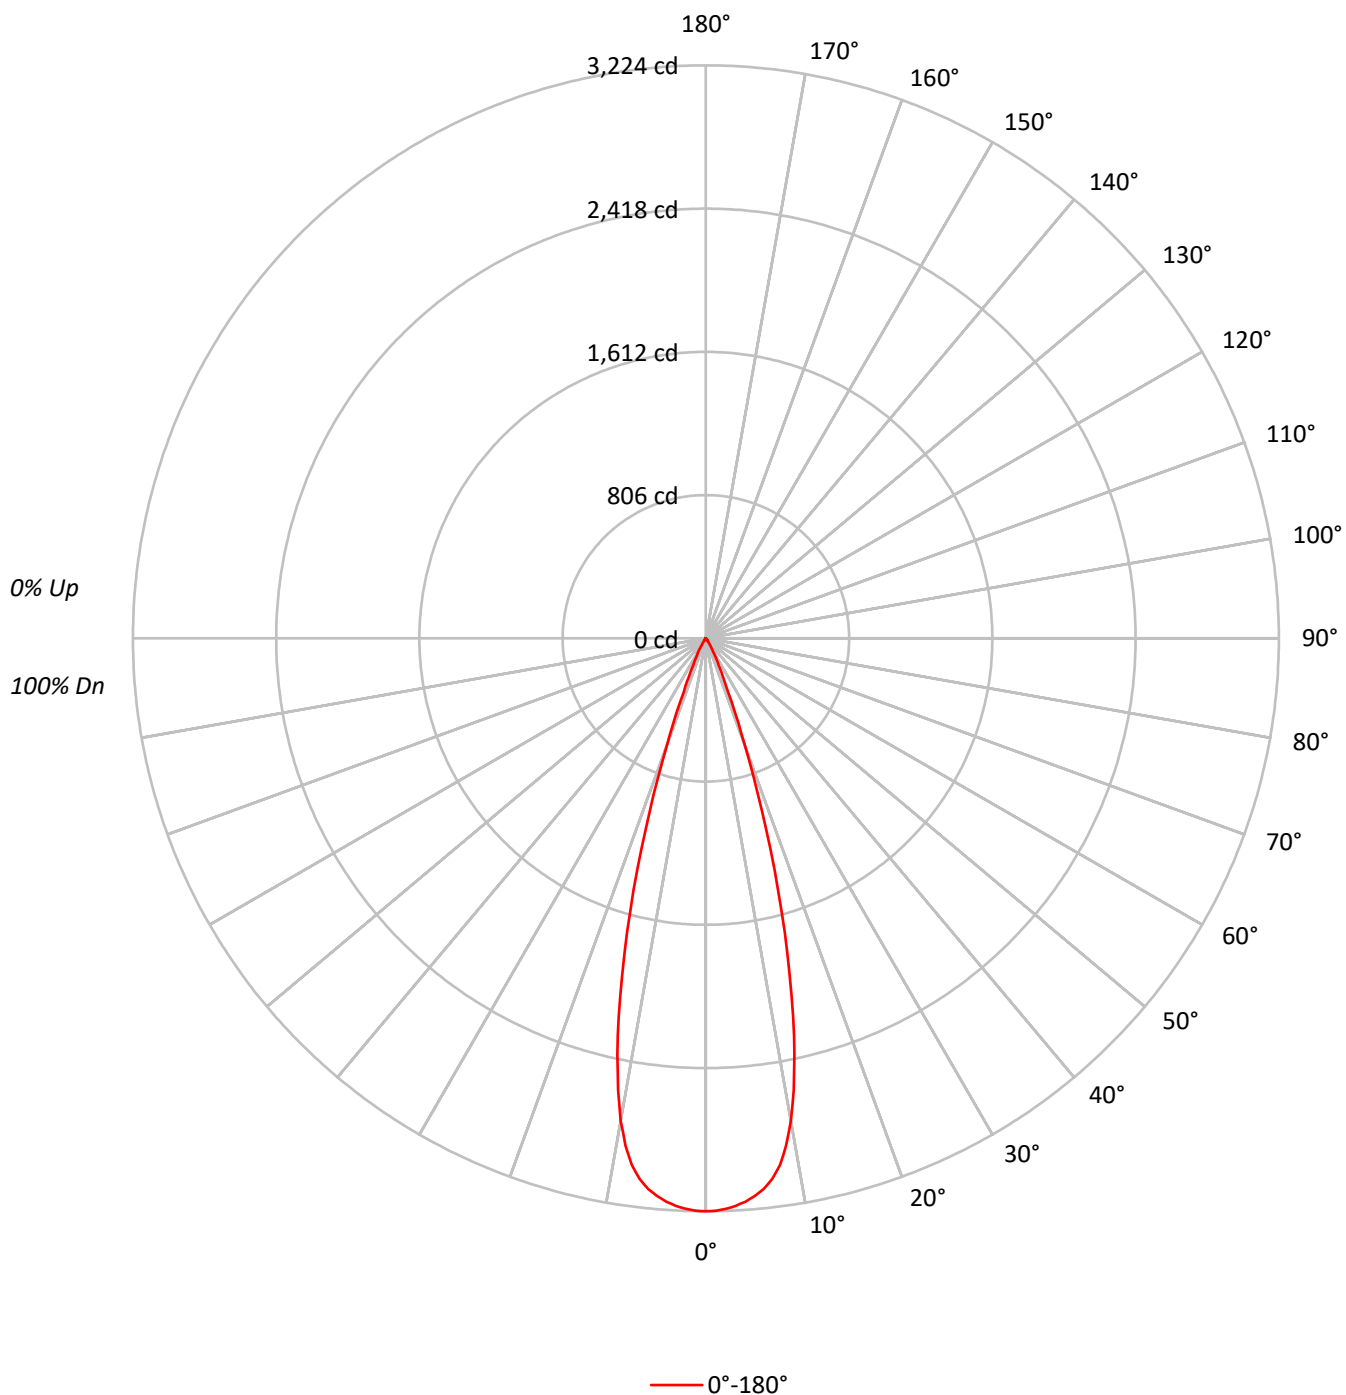

TEST NUMBER: P1267021

CATALOG NUMBER: P3AS09R309735DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	93	92
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91	90	89
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88	87	86
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	85	84	83
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83	82	81
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	80	79
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	78	77
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76	75	74
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	74	73	72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	706851
5°	693483
10°	613905
15°	388947
20°	147643
25°	43720
30°	17268
35°	5300
40°	2347
45°	837
50°	682
55°	535
60°	614
65°	726
70°	449
75°	593
80°	884
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 884 cd/sqm

TEST NUMBER: P1267021

CATALOG NUMBER: P3AS09R309735DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	289.6	33.4
10°-20°	451.4	52.0
20°-30°	104.8	12.1
30°-40°	16.3	1.9
40°-50°	2.8	0.3
50°-60°	1.3	0.2
60°-70°	1.1	0.1
70°-80°	0.7	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	845.8	97.4
0°-40°	862.0	99.3
0°-60°	866.1	99.8
0°-90°	868.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	868.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3224	
5°	3150	290
15°	1713	451
25°	181	105
35°	20	16
45°	3	3
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1267021

CATALOG NUMBER: P3AS09R309735DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	3223.5
1°	3221.4
2°	3212.6
3°	3197.6
4°	3178.5
5°	3150.5
6°	3115.7
7°	3063.9
8°	2993.0
9°	2888.7
10°	2757.1
11°	2587.4
12°	2395.8
13°	2183.1
14°	1949.2
15°	1713.3
17.5°	1120.9
20°	632.7
22.5°	323.2
25°	180.7
27.5°	111.1
30°	68.2
32.5°	36.8
35°	19.8
37.5°	13.0
40°	8.2
42.5°	4.8
45°	2.7
47.5°	2.0
50°	2.0
52.5°	1.4
55°	1.4
57.5°	1.4
60°	1.4
62.5°	1.4
65°	1.4
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1267021
CATALOG NUMBER: P3AS09R309735DE010 E3CD1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)