

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267035

Luminaire Tested: P3AS09R309735DE010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267035
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R309735DE010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 97CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 555.0 lumens
Efficiency: N/A
Efficacy: 50.0 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267035

CATALOG NUMBER: P3AS09R309735DE010 E3DLD1H

Luminous Intensity Polar Plot

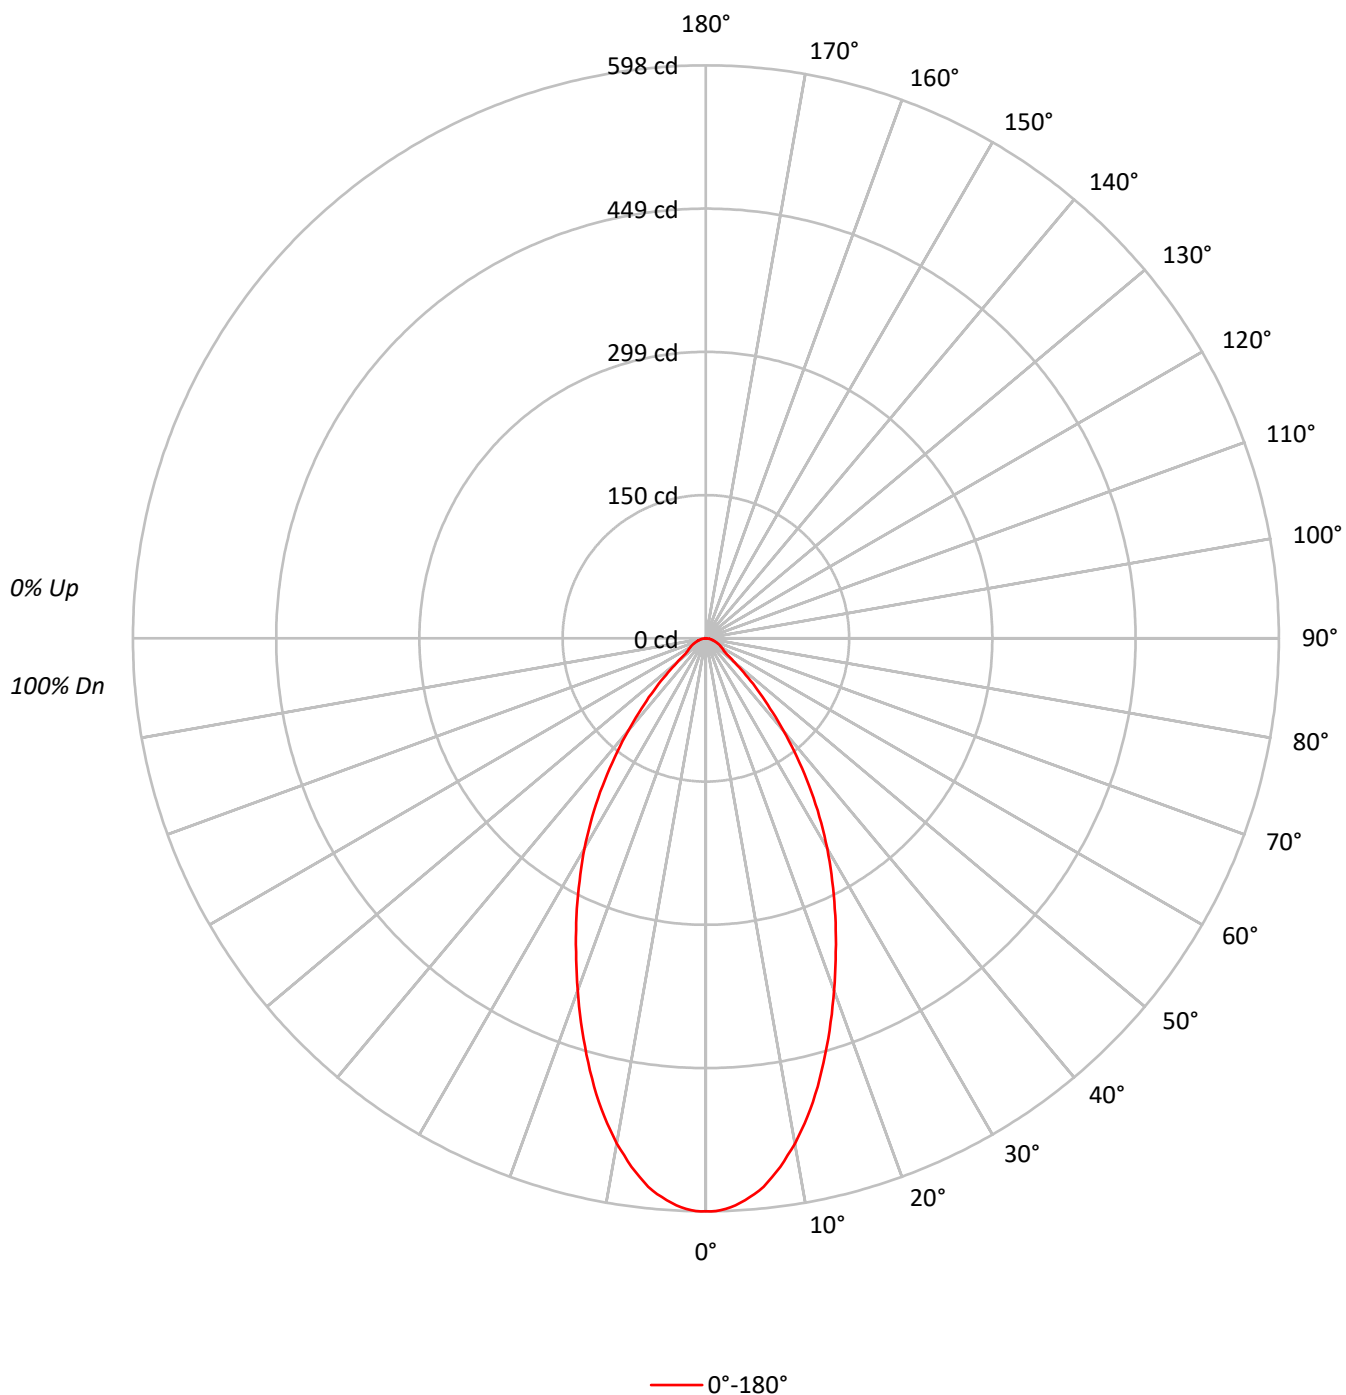

TEST NUMBER: P1267035

CATALOG NUMBER: P3AS09R309735DE010 E3DLD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	79	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	131130
5°	128175
10°	119192
15°	106062
20°	91218
25°	77279
30°	64136
35°	50326
40°	36068
45°	23661
50°	13475
55°	8869
60°	8377
65°	7783
70°	6988
75°	6354
80°	6061
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23661 cd/sqm

TEST NUMBER: P1267035

CATALOG NUMBER: P3AS09R309735DE010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.1	9.7
10°-20°	129.9	23.4
20°-30°	146.4	26.4
30°-40°	116.9	21.1
40°-50°	60.1	10.8
50°-60°	22.6	4.1
60°-70°	14.8	2.7
70°-80°	8.0	1.4
80°-90°	2.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	330.3	59.5
0°-40°	447.2	80.6
0°-60°	529.9	95.5
0°-90°	555.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	555.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	598	
5°	582	54
15°	467	130
25°	319	146
35°	188	117
45°	76	60
55°	23	23
65°	15	15
75°	8	8
85°	2	2
90°	0	

TEST NUMBER: P1267035

CATALOG NUMBER: P3AS09R309735DE010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	598.0
1°	598.0
2°	595.9
3°	592.5
4°	587.7
5°	582.3
6°	575.5
7°	566.6
8°	557.1
9°	546.2
10°	535.3
11°	523.0
12°	510.1
13°	496.5
14°	482.2
15°	467.2
17.5°	429.1
20°	390.9
22.5°	354.1
25°	319.4
27.5°	285.4
30°	253.3
32.5°	220.7
35°	188.0
37.5°	156.0
40°	126.0
42.5°	99.4
45°	76.3
47.5°	56.5
50°	39.5
52.5°	27.9
55°	23.2
57.5°	21.1
60°	19.1
62.5°	17.0
65°	15.0
67.5°	12.9
70°	10.9
72.5°	8.9
75°	7.5
77.5°	6.1
80°	4.8
82.5°	3.4
85°	2.0
87.5°	0.7



TEST NUMBER: P1267035

CATALOG NUMBER: P3AS09R309735DE010 E3DLD1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)