

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267056

Luminaire Tested: P3AS09R359735DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267056
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R359735DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 351.0 lumens
Efficiency: N/A
Efficacy: 31.6 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267056

CATALOG NUMBER: P3AS09R359735DE010 E3DL1GPH

Luminous Intensity Polar Plot

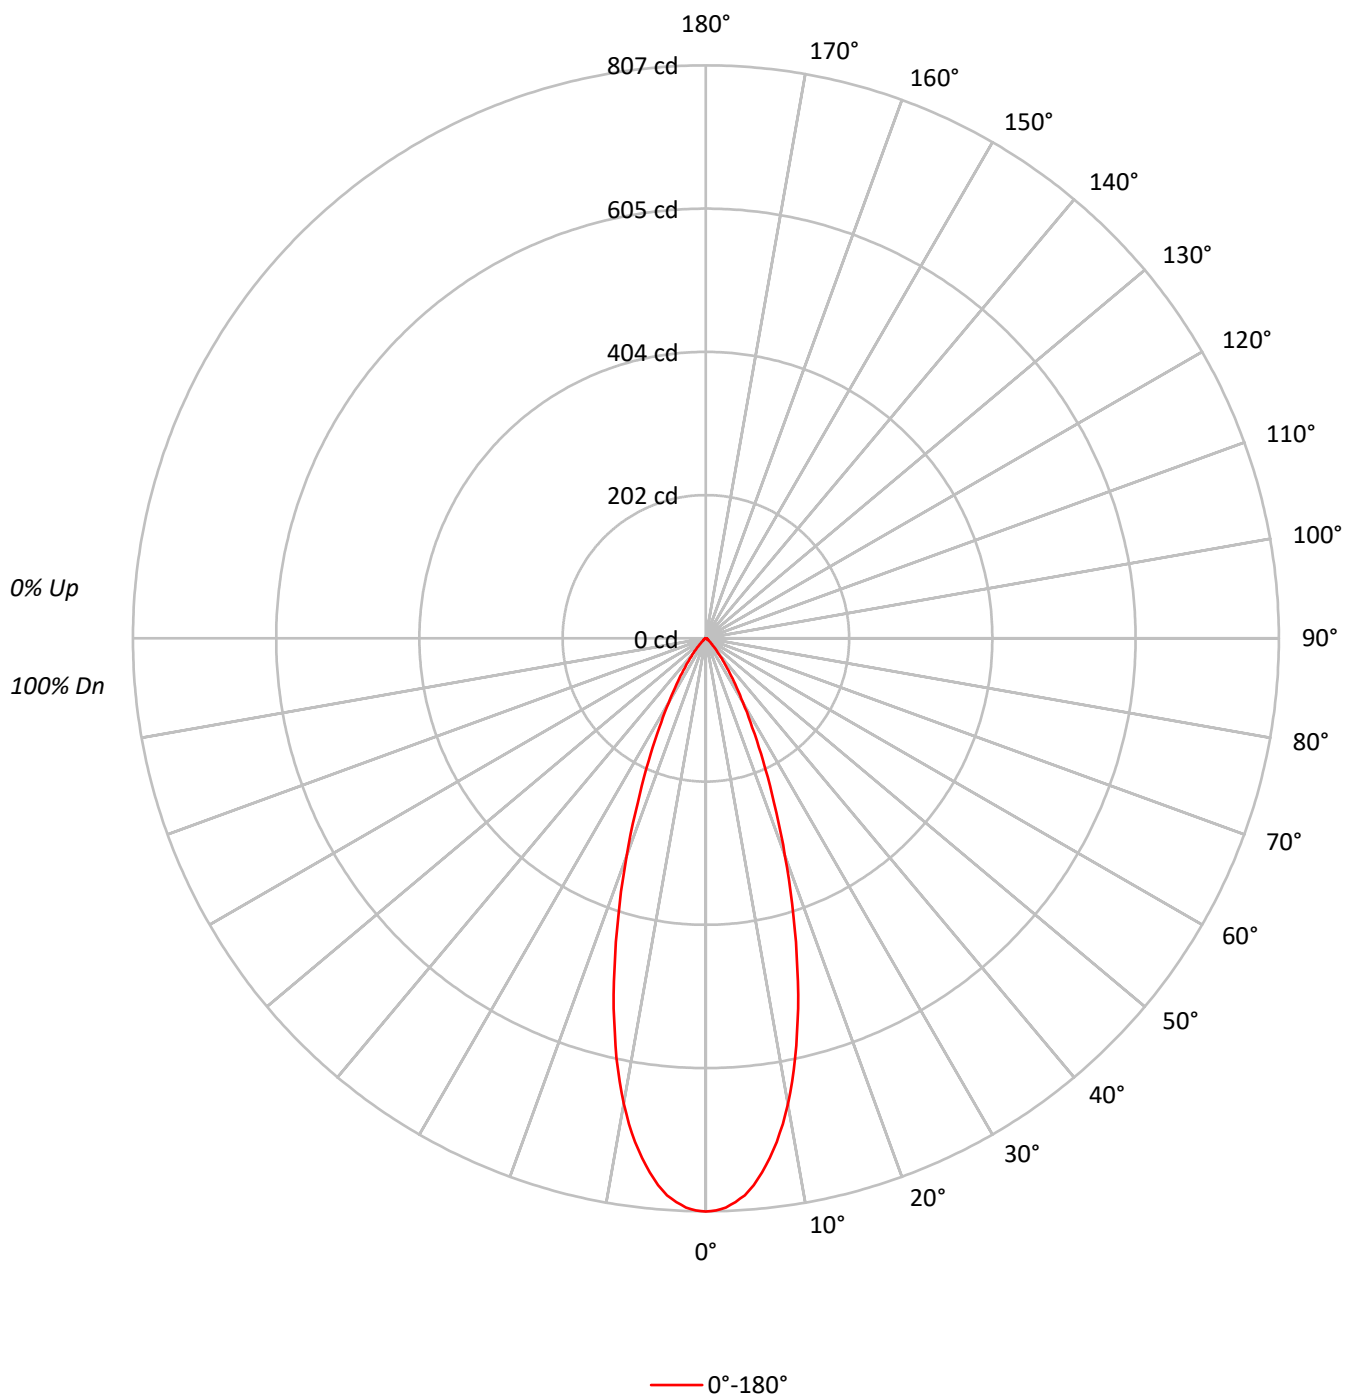

TEST NUMBER: P1267056

CATALOG NUMBER: P3AS09R359735DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	85	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	69	84	77	72	69	76	71	68		75	71	68		74
9	82	74	69	66	81	74	69	65	73	68	65		72	68	65		71
10	79	71	66	63	78	71	66	63	70	66	63		69	65	62		69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	177025
5°	170129
10°	148249
15°	113531
20°	75957
25°	45970
30°	26384
35°	14750
40°	7843
45°	4031
50°	1944
55°	1529
60°	1447
65°	1193
70°	1282
75°	1101
80°	1263
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4031 cd/sqm

TEST NUMBER: P1267056

CATALOG NUMBER: P3AS09R359735DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.3	20.0
10°-20°	136.3	38.8
20°-30°	89.2	25.4
30°-40°	36.2	10.3
40°-50°	10.9	3.1
50°-60°	3.7	1.0
60°-70°	2.5	0.7
70°-80°	1.5	0.4
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	295.8	84.3
0°-40°	332.0	94.6
0°-60°	346.6	98.7
0°-90°	351.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	351.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	807	
5°	773	70
15°	500	136
25°	190	89
35°	55	36
45°	13	11
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1267056

CATALOG NUMBER: P3AS09R359735DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	807.3
1°	806.0
2°	802.3
3°	795.0
4°	786.3
5°	772.9
6°	756.2
7°	737.5
8°	716.5
9°	692.5
10°	665.8
11°	636.0
12°	605.0
13°	570.3
14°	537.2
15°	500.1
17.5°	410.3
20°	325.5
22.5°	250.4
25°	190.0
27.5°	141.6
30°	104.2
32.5°	76.5
35°	55.1
37.5°	39.1
40°	27.4
42.5°	19.0
45°	13.0
47.5°	8.7
50°	5.7
52.5°	4.3
55°	4.0
57.5°	3.7
60°	3.3
62.5°	3.0
65°	2.3
67.5°	2.0
70°	2.0
72.5°	1.7
75°	1.3
77.5°	1.0
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3



TEST NUMBER: P1267056

CATALOG NUMBER: P3AS09R359735DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)