

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267206

Luminaire Tested: P3AS09R609735DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267206
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R609735DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 275.0 lumens
Efficiency: N/A
Efficacy: 24.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267206

CATALOG NUMBER: P3AS09R609735DE010 E3DLD1GPH

Luminous Intensity Polar Plot

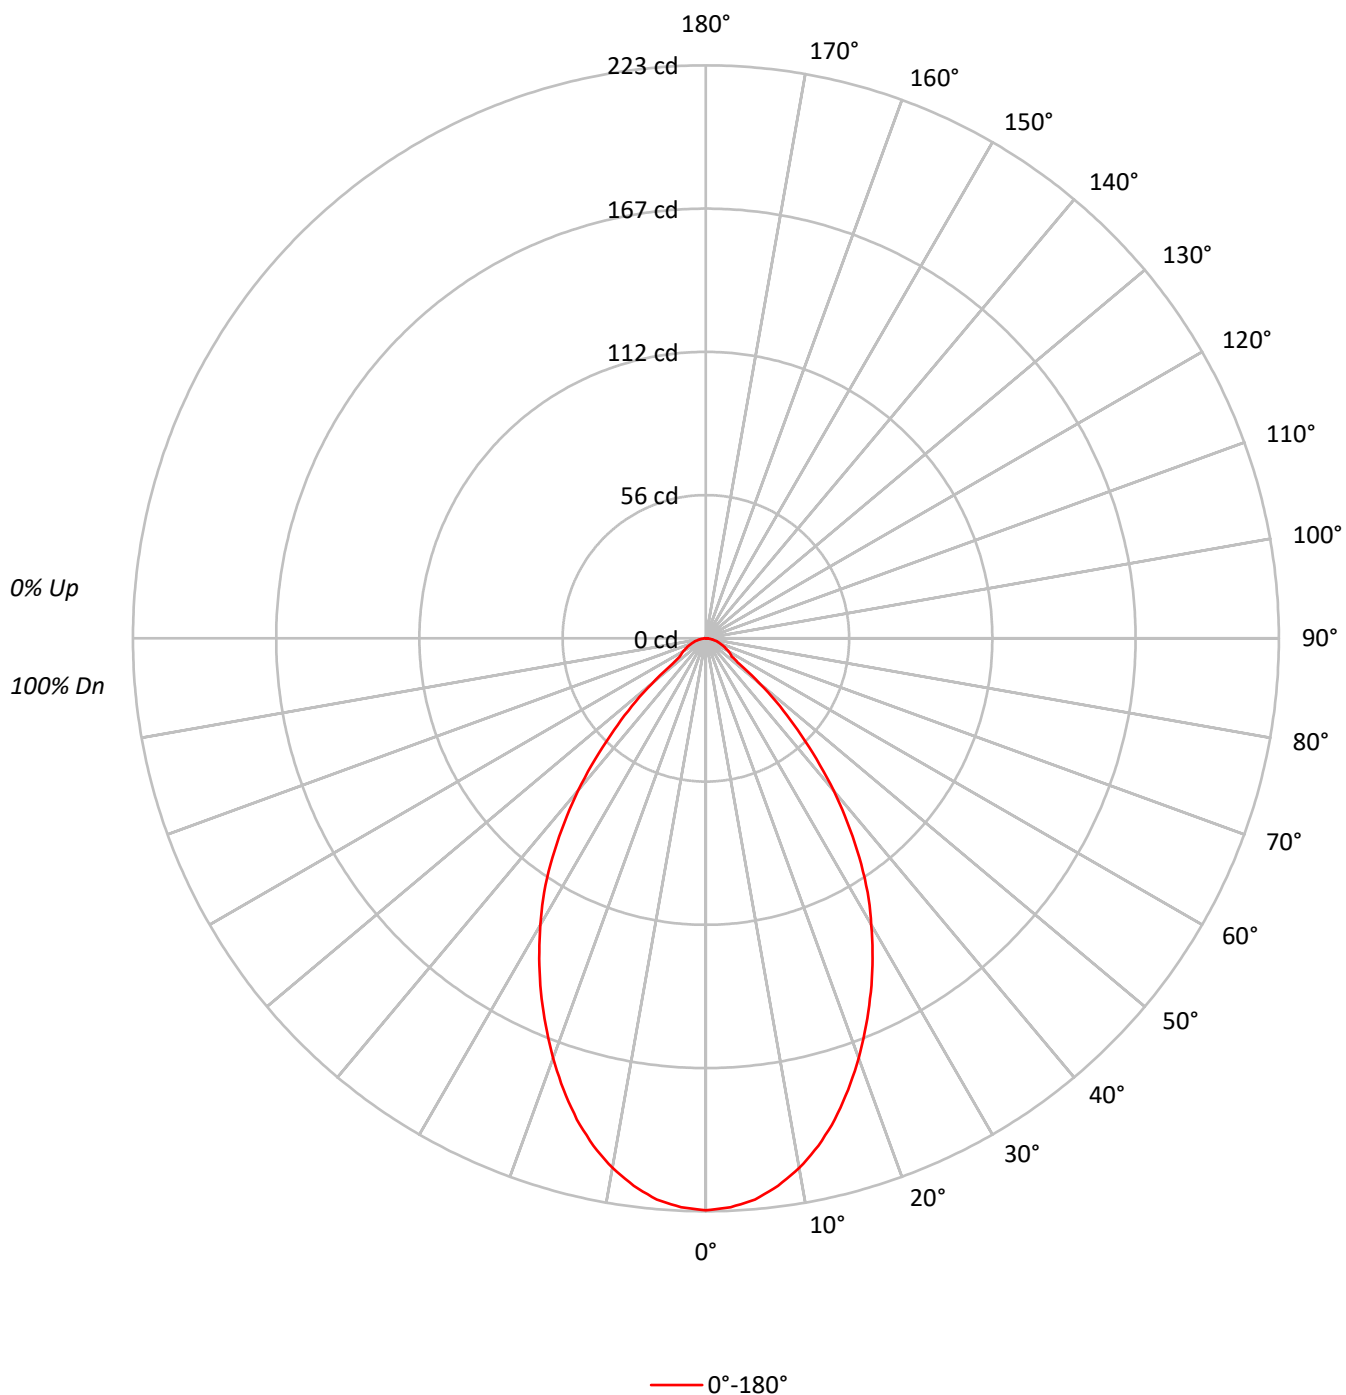

TEST NUMBER: P1267206

CATALOG NUMBER: P3AS09R609735DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48812
5°	48272
10°	46603
15°	44018
20°	40580
25°	36752
30°	32613
35°	27867
40°	22156
45°	15630
50°	9347
55°	4702
60°	4517
65°	4151
70°	3847
75°	3643
80°	3410
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15630 cd/sqm

TEST NUMBER: P1267206

CATALOG NUMBER: P3AS09R609735DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.6	7.5
10°-20°	54.2	19.7
20°-30°	69.6	25.3
30°-40°	64.5	23.5
40°-50°	39.3	14.3
50°-60°	13.1	4.8
60°-70°	8.0	2.9
70°-80°	4.5	1.6
80°-90°	1.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	144.4	52.5
0°-40°	208.9	76.0
0°-60°	261.3	95.0
0°-90°	275.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	275.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	223	
5°	219	21
15°	194	54
25°	152	70
35°	104	65
45°	50	39
55°	12	13
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1267206

CATALOG NUMBER: P3AS09R609735DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	222.6
2.5°	221.6
5°	219.3
7.5°	214.9
10°	209.3
12.5°	202.3
15°	193.9
17.5°	184.2
20°	173.9
22.5°	162.9
25°	151.9
27.5°	140.5
30°	128.8
32.5°	117.2
35°	104.1
37.5°	90.5
40°	77.4
42.5°	63.7
45°	50.4
47.5°	39.1
50°	27.4
52.5°	16.4
55°	12.3
57.5°	11.3
60°	10.3
62.5°	9.0
65°	8.0
67.5°	7.0
70°	6.0
72.5°	5.0
75°	4.3
77.5°	3.3
80°	2.7
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

(END OF REPORT)