

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267394

Luminaire Tested: P3AS13R209735DE010 E3PHLD1MW

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1267394  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R209735DE010 E3PHLD1MW  
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 97CRI , E3PHLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 623.1 lumens  
Efficiency: N/A  
Efficacy: 42.7 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.68  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1267394

CATALOG NUMBER: P3AS13R209735DE010 E3PHLD1MW

### Luminous Intensity Polar Plot

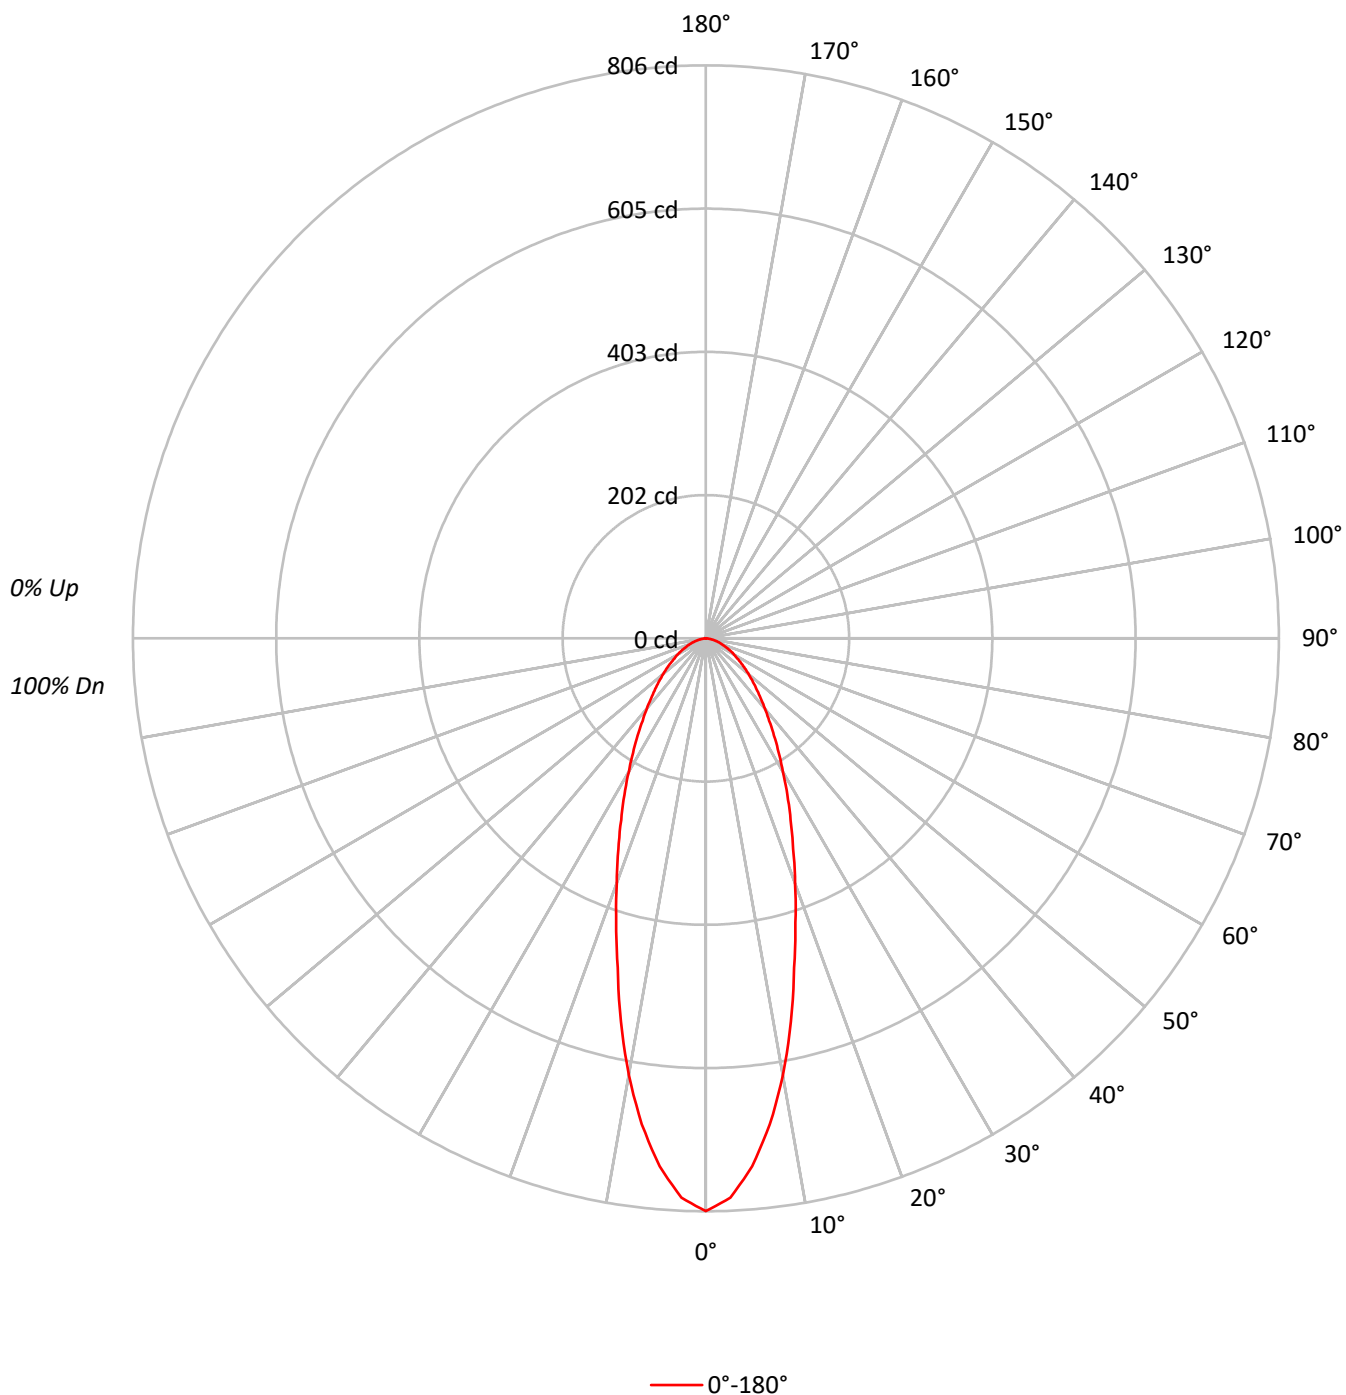

TEST NUMBER: P1267394

CATALOG NUMBER: P3AS13R209735DE010 E3PHLD1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 101 | 102 | 100 | 97  |  | 98  | 96  | 95  |  | 95  |
| 2   | 104 | 98  | 93  | 89  | 102 | 96  | 92  | 88  | 93  | 89  | 86  |  | 90  | 87  | 84  |  | 87  |
| 3   | 98  | 90  | 83  | 78  | 95  | 88  | 82  | 78  | 85  | 81  | 77  |  | 83  | 79  | 75  |  | 80  |
| 4   | 92  | 82  | 75  | 70  | 90  | 81  | 75  | 70  | 79  | 73  | 69  |  | 77  | 72  | 68  |  | 75  |
| 5   | 86  | 76  | 69  | 64  | 84  | 75  | 68  | 63  | 73  | 67  | 63  |  | 71  | 66  | 62  |  | 70  |
| 6   | 81  | 70  | 63  | 58  | 79  | 70  | 63  | 58  | 68  | 62  | 58  |  | 66  | 61  | 57  |  | 65  |
| 7   | 76  | 66  | 59  | 54  | 75  | 65  | 58  | 53  | 63  | 58  | 53  |  | 62  | 57  | 53  |  | 61  |
| 8   | 72  | 61  | 54  | 50  | 71  | 61  | 54  | 50  | 60  | 54  | 49  |  | 58  | 53  | 49  |  | 57  |
| 9   | 69  | 58  | 51  | 46  | 67  | 57  | 51  | 46  | 56  | 50  | 46  |  | 55  | 50  | 46  |  | 54  |
| 10  | 65  | 54  | 48  | 43  | 64  | 54  | 48  | 43  | 53  | 47  | 43  |  | 52  | 47  | 43  |  | 51  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 176674 |
| 5°  | 164142 |
| 10° | 138987 |
| 15° | 108809 |
| 20° | 85641  |
| 25° | 68254  |
| 30° | 54895  |
| 35° | 44758  |
| 40° | 37012  |
| 45° | 31197  |
| 50° | 26745  |
| 55° | 22976  |
| 60° | 20042  |
| 65° | 17641  |
| 70° | 15067  |
| 75° | 13302  |
| 80° | 9850   |
| 85° | 6542   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 31197 cd/sqm

TEST NUMBER: P1267394

CATALOG NUMBER: P3AS13R209735DE010 E3PHLD1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 67.3   | 10.8      |
| 10°-20°   | 134.2  | 21.5      |
| 20°-30°   | 130.3  | 20.9      |
| 30°-40°   | 105.3  | 16.9      |
| 40°-50°   | 78.2   | 12.6      |
| 50°-60°   | 54.3   | 8.7       |
| 60°-70°   | 34.1   | 5.5       |
| 70°-80°   | 16.5   | 2.7       |
| 80°-90°   | 2.8    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 331.8  | 53.3      |
| 0°-40°    | 437.1  | 70.1      |
| 0°-60°    | 569.6  | 91.4      |
| 0°-90°    | 623.1  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 623.1  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 806 |      |
| 5°  | 746 | 67   |
| 15° | 479 | 134  |
| 25° | 282 | 130  |
| 35° | 167 | 105  |
| 45° | 101 | 78   |
| 55° | 60  | 54   |
| 65° | 34  | 34   |
| 75° | 16  | 17   |
| 85° | 3   | 3    |
| 90° | 0   |      |

TEST NUMBER: P1267394

CATALOG NUMBER: P3AS13R209735DE010 E3PHLD1MW

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 805.7 |
| 2.5°  | 787.5 |
| 5°    | 745.7 |
| 7.5°  | 689.5 |
| 10°   | 624.2 |
| 12.5° | 552.4 |
| 15°   | 479.3 |
| 17.5° | 419.2 |
| 20°   | 367.0 |
| 22.5° | 321.2 |
| 25°   | 282.1 |
| 27.5° | 248.1 |
| 30°   | 216.8 |
| 32.5° | 190.7 |
| 35°   | 167.2 |
| 37.5° | 146.3 |
| 40°   | 129.3 |
| 42.5° | 113.6 |
| 45°   | 100.6 |
| 47.5° | 88.8  |
| 50°   | 78.4  |
| 52.5° | 69.2  |
| 55°   | 60.1  |
| 57.5° | 52.2  |
| 60°   | 45.7  |
| 62.5° | 40.5  |
| 65°   | 34.0  |
| 67.5° | 28.7  |
| 70°   | 23.5  |
| 72.5° | 19.6  |
| 75°   | 15.7  |
| 77.5° | 11.8  |
| 80°   | 7.8   |
| 82.5° | 3.9   |
| 85°   | 2.6   |
| 87.5° | 0.0   |
| 90°   | 0.0   |

(END OF REPORT)