

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267626

Luminaire Tested: P3AS13R609735DE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267626
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R609735DE010 E3DLP1MW
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 658.0 lumens
Efficiency: N/A
Efficacy: 45.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267626

CATALOG NUMBER: P3AS13R609735DE010 E3DLP1MW

Luminous Intensity Polar Plot

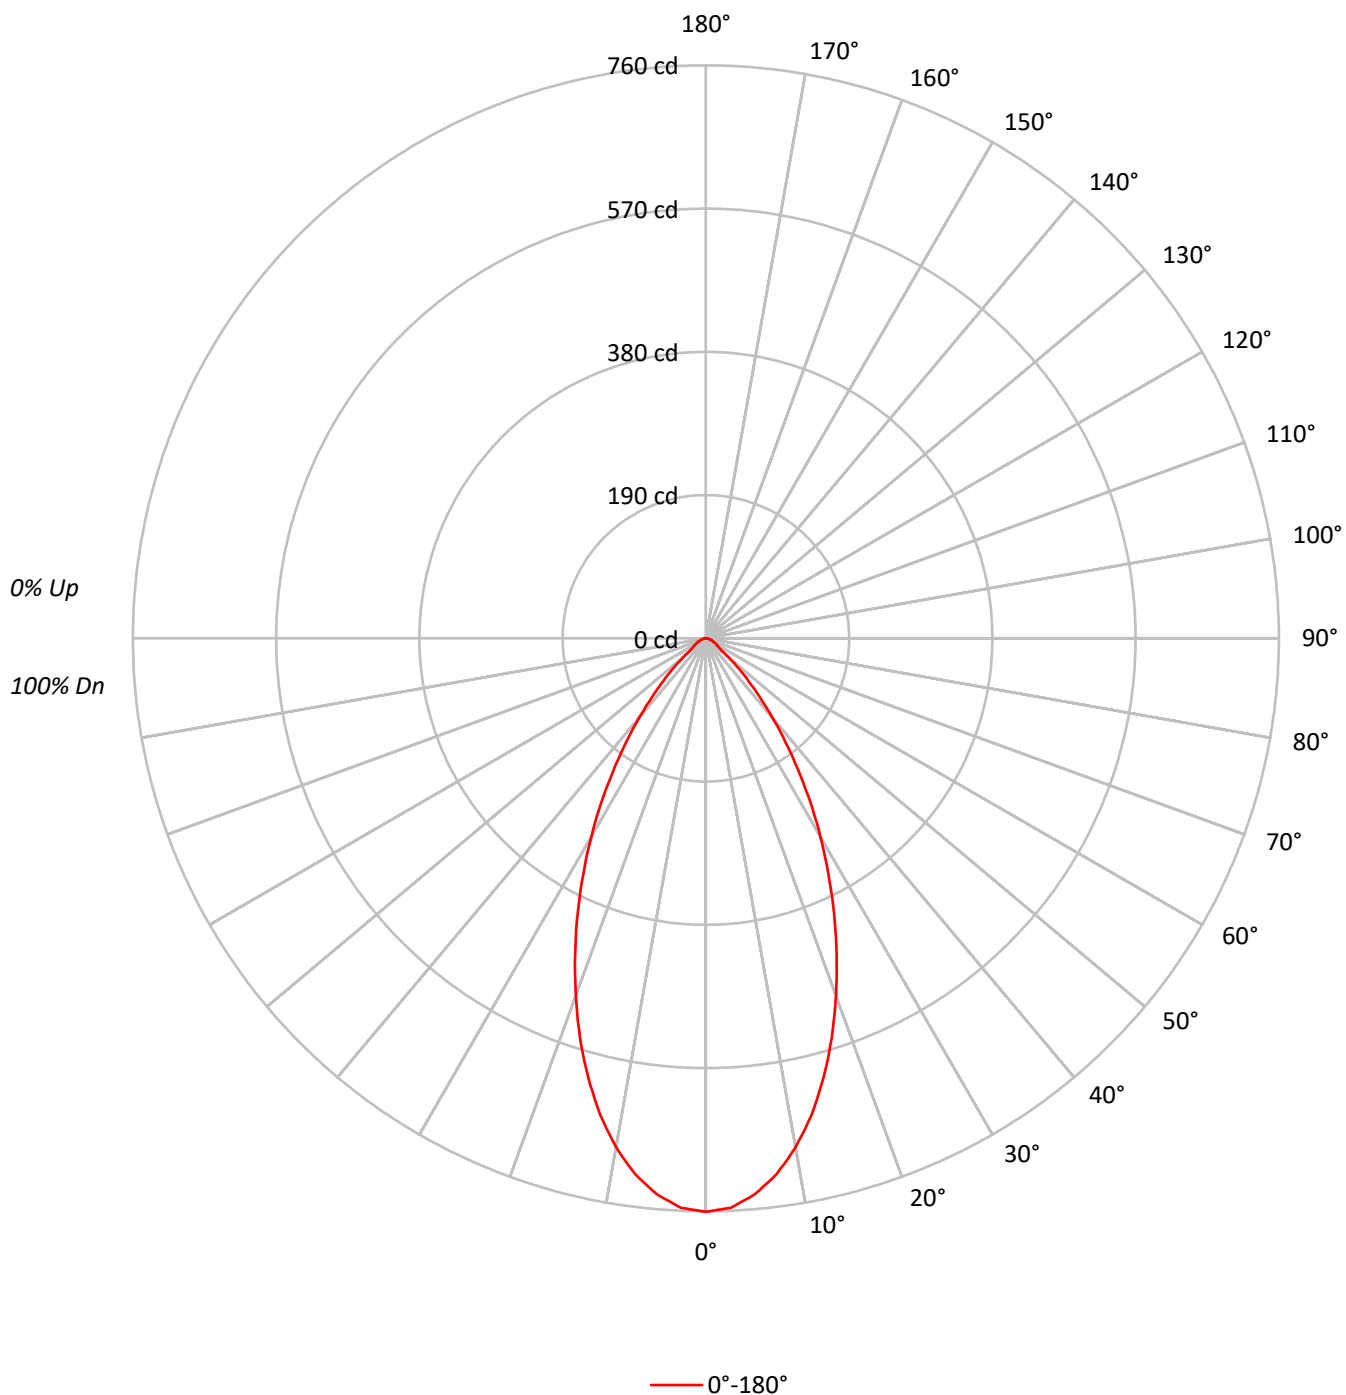

TEST NUMBER: P1267626

CATALOG NUMBER: P3AS13R609735DE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166763
5°	163020
10°	152614
15°	136913
20°	117750
25°	97360
30°	76923
35°	57126
40°	39331
45°	24685
50°	13577
55°	7952
60°	7149
65°	6123
70°	5193
75°	5338
80°	4546
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24685 cd/sqm

TEST NUMBER: P1267626

CATALOG NUMBER: P3AS13R609735DE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.9	10.5
10°-20°	167.5	25.5
20°-30°	183.7	27.9
30°-40°	133.8	20.3
40°-50°	63.2	9.6
50°-60°	20.7	3.1
60°-70°	11.7	1.8
70°-80°	6.3	1.0
80°-90°	2.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	420.2	63.9
0°-40°	554.0	84.2
0°-60°	638.0	97.0
0°-90°	658.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	658.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	760	
5°	741	69
15°	603	167
25°	402	184
35°	213	134
45°	80	63
55°	21	21
65°	12	12
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1267626

CATALOG NUMBER: P3AS13R609735DE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	760.5
2.5°	756.0
5°	740.6
7.5°	717.1
10°	685.4
12.5°	647.4
15°	603.1
17.5°	555.2
20°	504.6
22.5°	453.0
25°	402.4
27.5°	351.8
30°	303.8
32.5°	257.7
35°	213.4
37.5°	173.6
40°	137.4
42.5°	105.8
45°	79.6
47.5°	57.9
50°	39.8
52.5°	26.2
55°	20.8
57.5°	18.1
60°	16.3
62.5°	13.6
65°	11.8
67.5°	9.9
70°	8.1
72.5°	7.2
75°	6.3
77.5°	4.5
80°	3.6
82.5°	2.7
85°	1.8
87.5°	0.9
90°	0.0

(END OF REPORT)