

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267640

Luminaire Tested: P3AS13R659735DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267640
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRIS
Catalog Number: P3AS13R659735DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 445.0 lumens
Efficiency: N/A
Efficacy: 30.5 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267640
CATALOG NUMBER: P3AS13R659735DE010 E3DL1GPH

Luminous Intensity Polar Plot

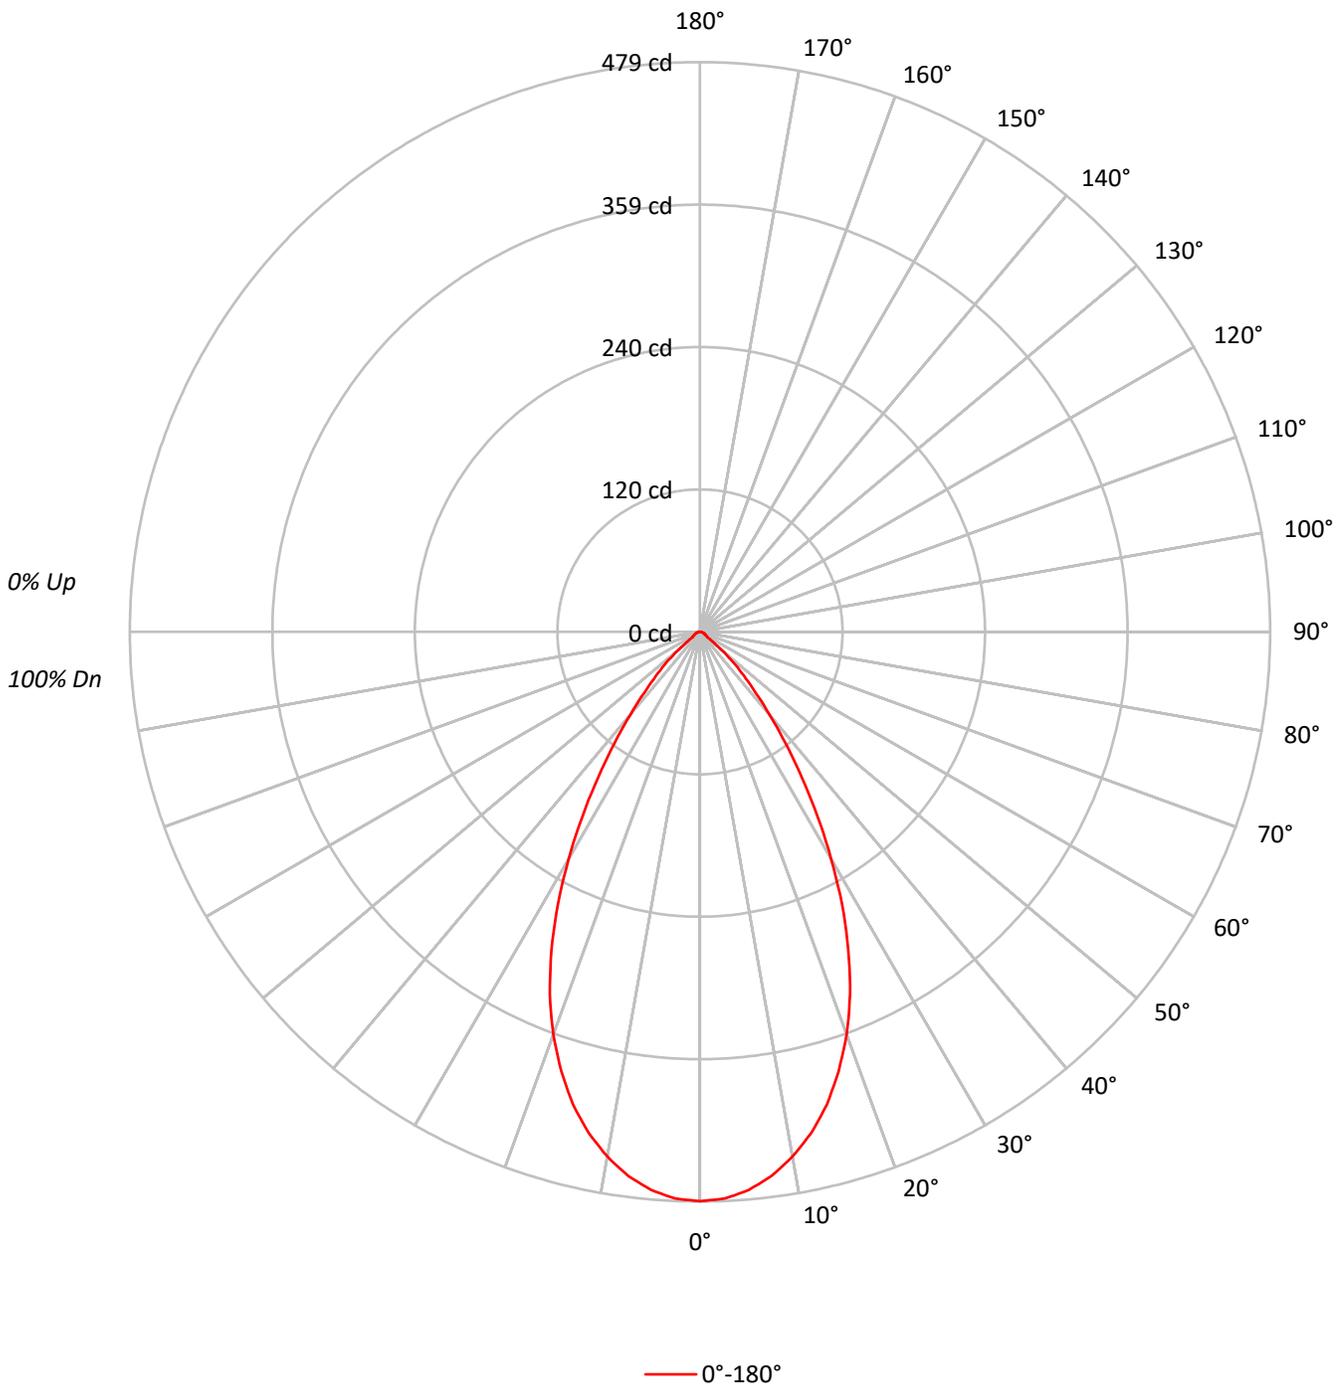



TEST NUMBER: P1267640
 CATALOG NUMBER: P3AS13R659735DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	95	89	85	99	93	88	84	90	86	83	88	85	82	86	83	80	79				79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	68				68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	67	64	63				63
7	82	72	66	61	80	71	65	61	70	64	61	69	64	60	67	63	60	58				58
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55				55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51				51
10	70	60	54	50	69	59	54	50	59	53	50	58	53	50	57	53	49	48				48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	104948
5°	103676
10°	99753
15°	93440
20°	84054
25°	71375
30°	55806
35°	39779
40°	26020
45°	16095
50°	8187
55°	2867
60°	2544
65°	2542
70°	2244
75°	2288
80°	2273
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16095 cd/sqm



TEST NUMBER: P1267640
 CATALOG NUMBER: P3AS13R659735DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.2	9.9
10°-20°	114.6	25.7
20°-30°	133.9	30.1
30°-40°	93.6	21.0
40°-50°	41.2	9.3
50°-60°	9.2	2.1
60°-70°	4.7	1.0
70°-80°	2.8	0.6
80°-90°	1.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	292.7	65.8
0°-40°	386.2	86.8
0°-60°	436.6	98.1
0°-90°	445.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	445.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	479	
5°	471	44
15°	412	115
25°	295	134
35°	149	94
45°	52	41
55°	8	9
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1267640
CATALOG NUMBER: P3AS13R659735DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	478.6
2.5°	476.8
5°	471.0
7.5°	461.3
10°	448.0
12.5°	431.6
15°	411.6
17.5°	387.2
20°	360.2
22.5°	329.6
25°	295.0
27.5°	258.6
30°	220.4
32.5°	183.6
35°	148.6
37.5°	118.0
40°	90.9
42.5°	68.7
45°	51.9
47.5°	38.1
50°	24.0
52.5°	12.4
55°	7.5
57.5°	6.7
60°	5.8
62.5°	5.3
65°	4.9
67.5°	4.0
70°	3.5
72.5°	3.1
75°	2.7
77.5°	2.2
80°	1.8
82.5°	1.3
85°	0.9
87.5°	0.4
90°	0.0

(END OF REPORT)