

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267698

Luminaire Tested: P3AS17R159735DE010 E3DL1WH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1267698  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R159735DE010 E3DL1WH  
Description: 3in Adjustable LED luminaire with, R15 optic, 3500K CCT AND, 97CRI , E3DL1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 739.0 lumens  
Efficiency: N/A  
Efficacy: 34.9 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 21.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1267698  
CATALOG NUMBER: P3AS17R159735DE010 E3DL1WH

### Luminous Intensity Polar Plot

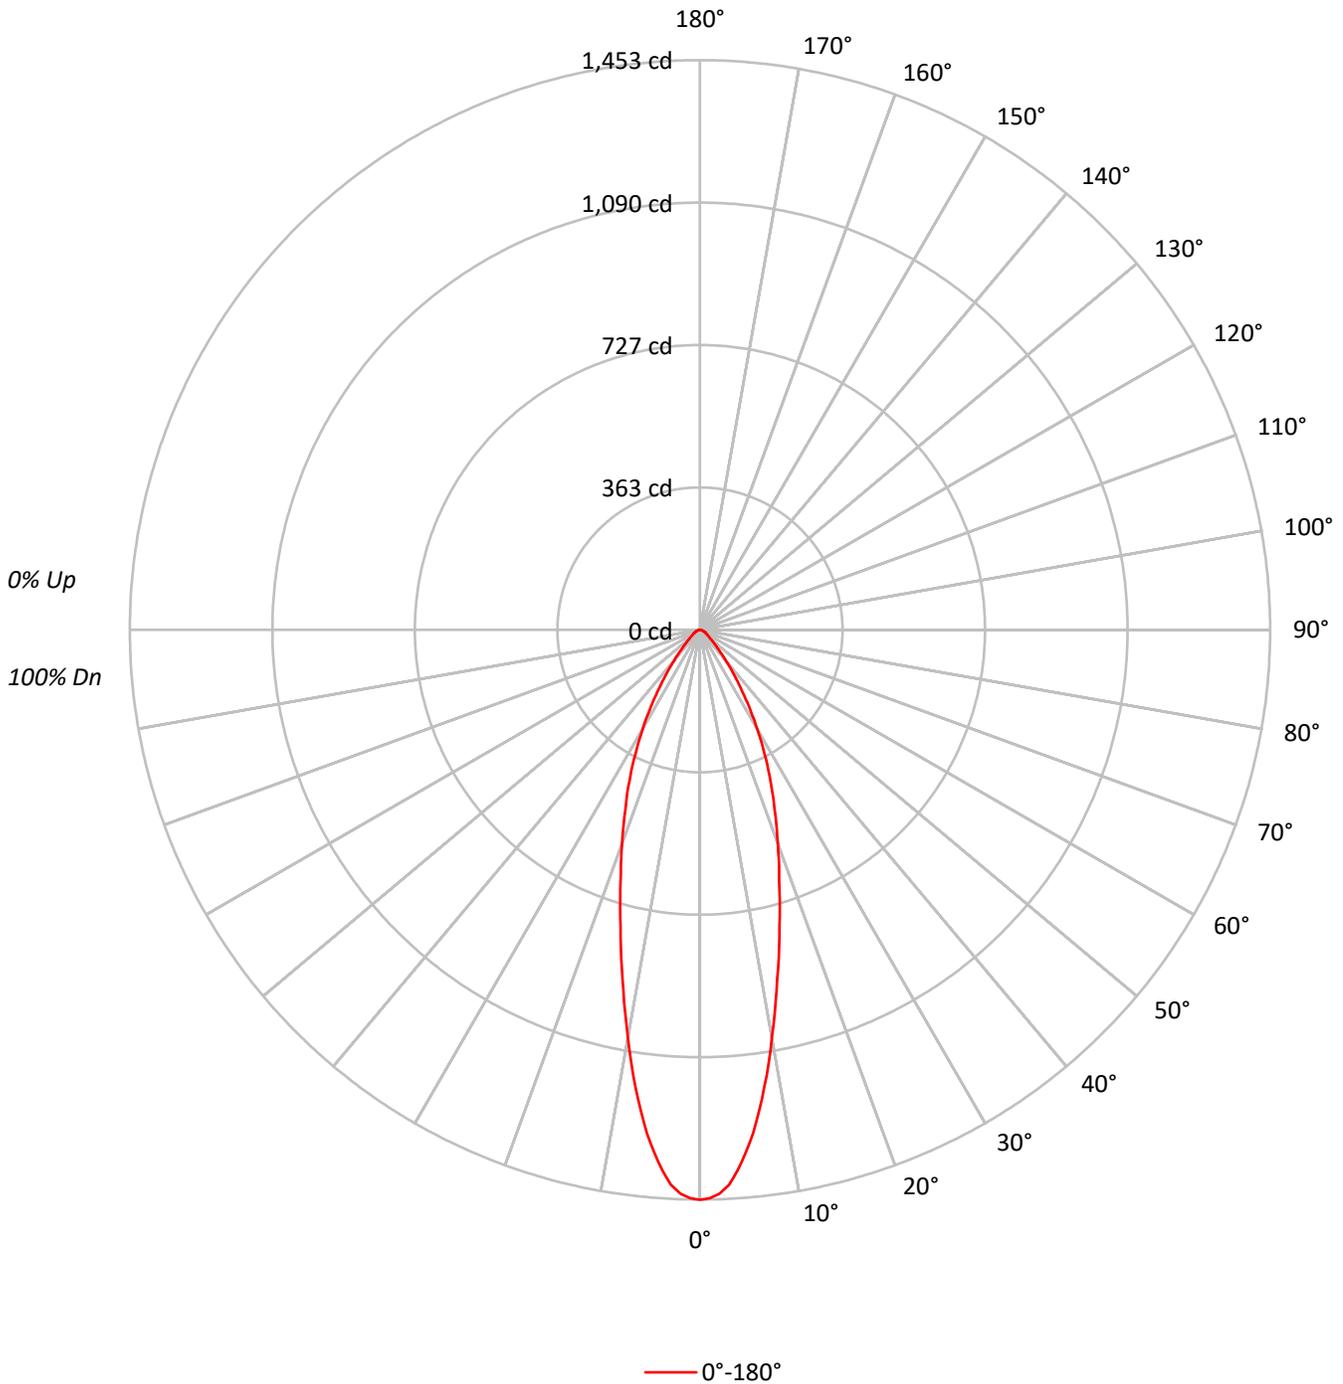



TEST NUMBER: P1267698  
 CATALOG NUMBER: P3AS17R159735DE010 E3DL1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86	86	86	86
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80	80	80	80
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75	75	75	75
5	93	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66	66	66	66
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62	62	62	62
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59	59	59	59
9	77	68	62	58	76	67	62	58	66	61	58	65	61	57	64	60	57	56	56	56	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	318681
5°	294540
10°	235133
15°	177617
20°	135252
25°	103070
30°	73834
35°	48185
40°	29541
45°	17862
50°	11872
55°	9175
60°	7894
65°	6849
70°	6155
75°	6100
80°	4546
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17862 cd/sqm



TEST NUMBER: P1267698  
 CATALOG NUMBER: P3AS17R159735DE010 E3DL1WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	118.5	16.0
10°-20°	218.7	29.6
20°-30°	194.7	26.3
30°-40°	115.2	15.6
40°-50°	47.3	6.4
50°-60°	22.2	3.0
60°-70°	13.5	1.8
70°-80°	7.1	1.0
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	531.9	72.0
0°-40°	647.1	87.6
0°-60°	716.6	97.0
0°-90°	739.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	739.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1453	
5°	1338	119
15°	782	219
25°	426	195
35°	180	115
45°	58	47
55°	24	22
65°	13	13
75°	7	7
85°	1	2
90°	0	



TEST NUMBER: P1267698  
CATALOG NUMBER: P3AS17R159735DE010 E3DL1WH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1453.3
1°	1449.7
2°	1438.9
3°	1417.3
4°	1381.3
5°	1338.1
6°	1291.3
7°	1236.1
8°	1178.5
9°	1119.7
10°	1056.0
12.5°	910.8
15°	782.4
17.5°	672.0
20°	579.6
22.5°	498.0
25°	426.0
27.5°	356.4
30°	291.6
32.5°	232.8
35°	180.0
37.5°	138.0
40°	103.2
42.5°	76.8
45°	57.6
47.5°	44.4
50°	34.8
52.5°	28.8
55°	24.0
57.5°	20.4
60°	18.0
62.5°	15.6
65°	13.2
67.5°	12.0
70°	9.6
72.5°	8.4
75°	7.2
77.5°	4.8
80°	3.6
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)