

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267723

Luminaire Tested: P3AS17R209735DE010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267723
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R209735DE010 E3D1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 97CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1515.0 lumens
Efficiency: N/A
Efficacy: 71.5 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267723
CATALOG NUMBER: P3AS17R209735DE010 E3D1MW

Luminous Intensity Polar Plot

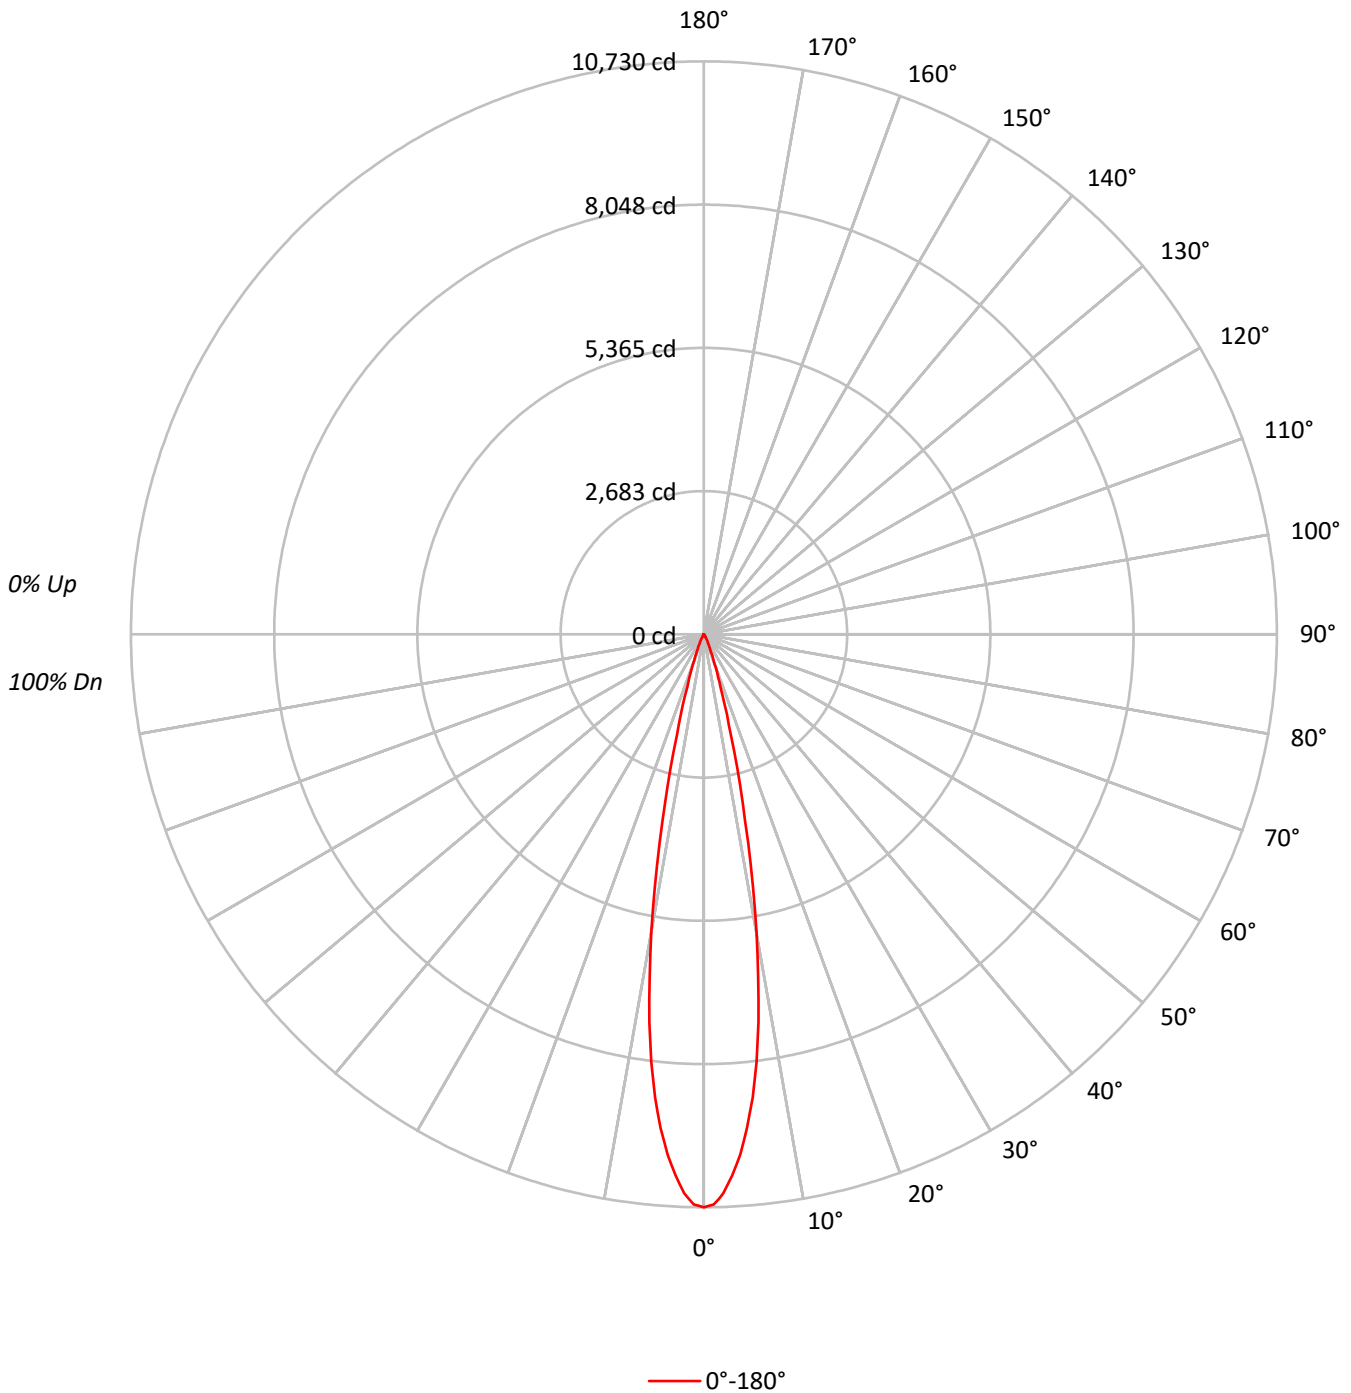



TEST NUMBER: P1267723

CATALOG NUMBER: P3AS17R209735DE010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	99	99	99	98
2	112	109	107	104	110	108	105	103	104	103	101	102	100	99	99	98	97	99	98	97	95
3	109	105	102	100	108	104	101	99	102	99	97	99	98	96	97	96	95	97	96	95	93
4	107	102	99	96	105	101	98	96	99	97	95	97	95	93	96	94	92	96	94	92	91
5	104	99	96	93	103	98	95	93	97	94	92	95	93	91	94	92	91	94	92	91	90
6	102	97	93	91	101	96	93	90	95	92	90	94	91	89	93	90	89	93	90	89	88
7	100	94	91	88	99	94	91	88	93	90	88	92	89	87	91	89	87	91	89	87	86
8	98	92	89	86	97	92	89	86	91	88	86	90	88	86	89	87	85	89	87	85	85
9	96	90	87	85	95	90	87	85	89	86	84	89	86	84	88	86	84	88	86	84	83
10	94	89	85	83	93	88	85	83	88	85	83	87	84	83	86	84	82	86	84	82	82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2352969
5°	2042302
10°	1261923
15°	438300
20°	134598
25°	47591
30°	17623
35°	7067
40°	3779
45°	1489
50°	819
55°	918
60°	1053
65°	623
70°	769
75°	1017
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1489 cd/sqm



TEST NUMBER: P1267723
 CATALOG NUMBER: P3AS17R209735DE010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	770.0	50.8
10°-20°	611.0	40.3
20°-30°	105.8	7.0
30°-40°	19.2	1.3
40°-50°	4.4	0.3
50°-60°	2.2	0.1
60°-70°	1.3	0.1
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1486.8	98.1
0°-40°	1506.0	99.4
0°-60°	1512.6	99.8
0°-90°	1515.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1515.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10730	
5°	9278	770
15°	1931	611
25°	197	106
35°	26	19
45°	5	4
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1267723
CATALOG NUMBER: P3AS17R209735DE010 E3D1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	10730.4
1°	10678.8
2°	10475.0
3°	10147.6
4°	9763.8
5°	9278.2
6°	8721.7
7°	8074.2
8°	7336.7
9°	6508.0
10°	5667.4
12.5°	3574.8
15°	1930.7
17.5°	1031.3
20°	576.8
22.5°	329.8
25°	196.7
27.5°	119.9
30°	69.6
32.5°	40.8
35°	26.4
37.5°	18.0
40°	13.2
42.5°	8.4
45°	4.8
47.5°	2.4
50°	2.4
52.5°	2.4
55°	2.4
57.5°	2.4
60°	2.4
62.5°	1.2
65°	1.2
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	1.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)