

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267809

Luminaire Tested: P3AS17R359735DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267809
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359735DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1523.0 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267809

CATALOG NUMBER: P3AS17R359735DE010 E3CD1MMS

Luminous Intensity Polar Plot

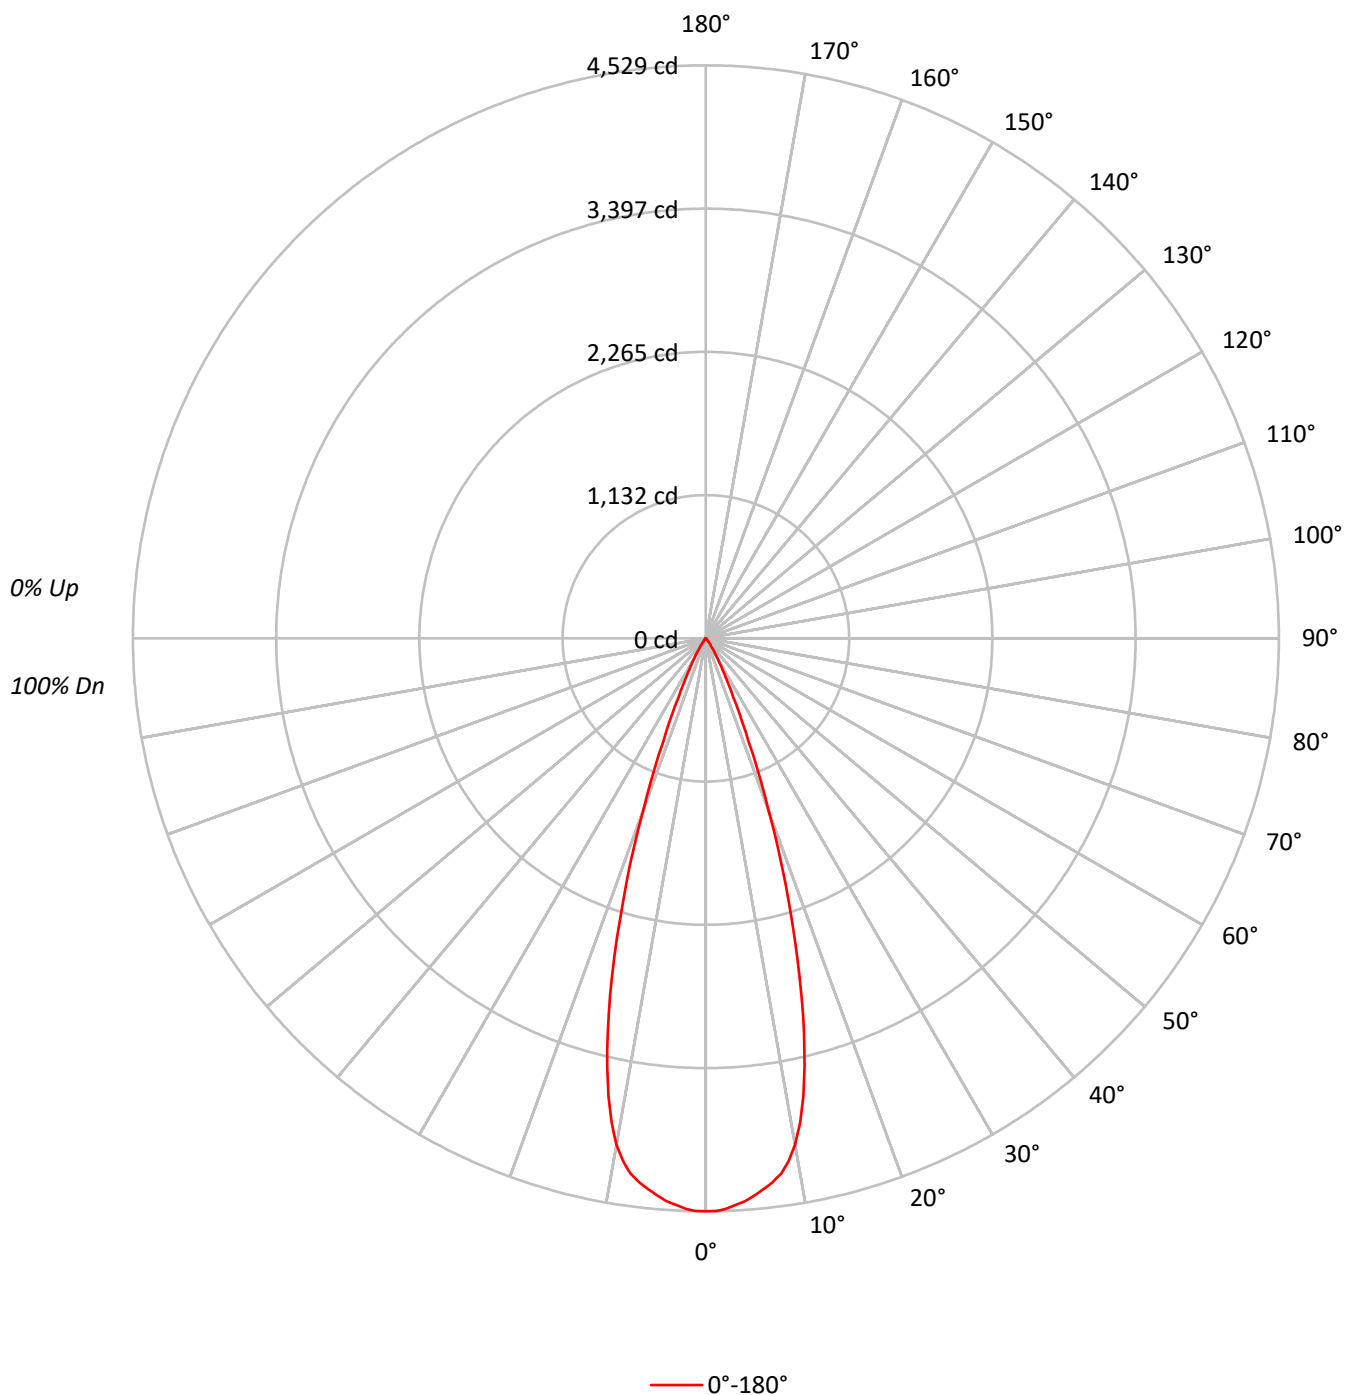

TEST NUMBER: P1267809

CATALOG NUMBER: P3AS17R359735DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	103	100	102	100	98		99	98	96		97
3	107	102	98	95	105	101	97	95	98	96	93		96	94	92		94
4	104	98	94	91	102	97	93	90	95	92	89		93	90	88		91
5	100	94	90	87	99	93	89	86	92	88	86		90	87	85		89
6	97	91	86	83	96	90	86	83	89	85	82		87	84	82		86
7	94	87	83	80	93	87	83	80	86	82	79		85	81	79		84
8	91	84	80	77	90	84	80	77	83	79	77		82	79	76		81
9	89	82	77	74	88	81	77	74	80	77	74		80	76	74		79
10	86	79	75	72	85	79	75	72	78	74	72		77	74	72		77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	993100
5°	972857
10°	905060
15°	663545
20°	339786
25°	122451
30°	47678
35°	16704
40°	6870
45°	1861
50°	1637
55°	1835
60°	1579
65°	1245
70°	1539
75°	2033
80°	1515
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 2033 cd/sqm

TEST NUMBER: P1267809

CATALOG NUMBER: P3AS17R359735DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	412.0	27.1
10°-20°	773.1	50.8
20°-30°	273.7	18.0
30°-40°	47.9	3.1
40°-50°	7.0	0.5
50°-60°	3.9	0.3
60°-70°	2.8	0.2
70°-80°	2.1	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1458.8	95.8
0°-40°	1506.7	98.9
0°-60°	1517.6	99.6
0°-90°	1523.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1523.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4529	
5°	4420	412
15°	2923	773
25°	506	274
35°	62	48
45°	6	7
55°	5	4
65°	2	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1267809

CATALOG NUMBER: P3AS17R359735DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	4528.9
1°	4527.7
2°	4513.3
3°	4485.7
4°	4460.5
5°	4419.7
6°	4377.8
7°	4331.0
8°	4273.4
9°	4183.5
10°	4064.7
11°	3900.4
12°	3702.5
13°	3467.4
14°	3208.4
15°	2922.9
17.5°	2176.9
20°	1456.1
22.5°	878.0
25°	506.1
27.5°	302.2
30°	188.3
32.5°	109.1
35°	62.4
37.5°	39.6
40°	24.0
42.5°	12.0
45°	6.0
47.5°	4.8
50°	4.8
52.5°	4.8
55°	4.8
57.5°	3.6
60°	3.6
62.5°	3.6
65°	2.4
67.5°	2.4
70°	2.4
72.5°	2.4
75°	2.4
77.5°	1.2
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0



TEST NUMBER: P1267809

CATALOG NUMBER: P3AS17R359735DE010 E3CD1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)