

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267840

Luminaire Tested: P3AS17R409735DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267840
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409735DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 97CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1680.0 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267840

CATALOG NUMBER: P3AS17R409735DE010 E3D1LI

Luminous Intensity Polar Plot

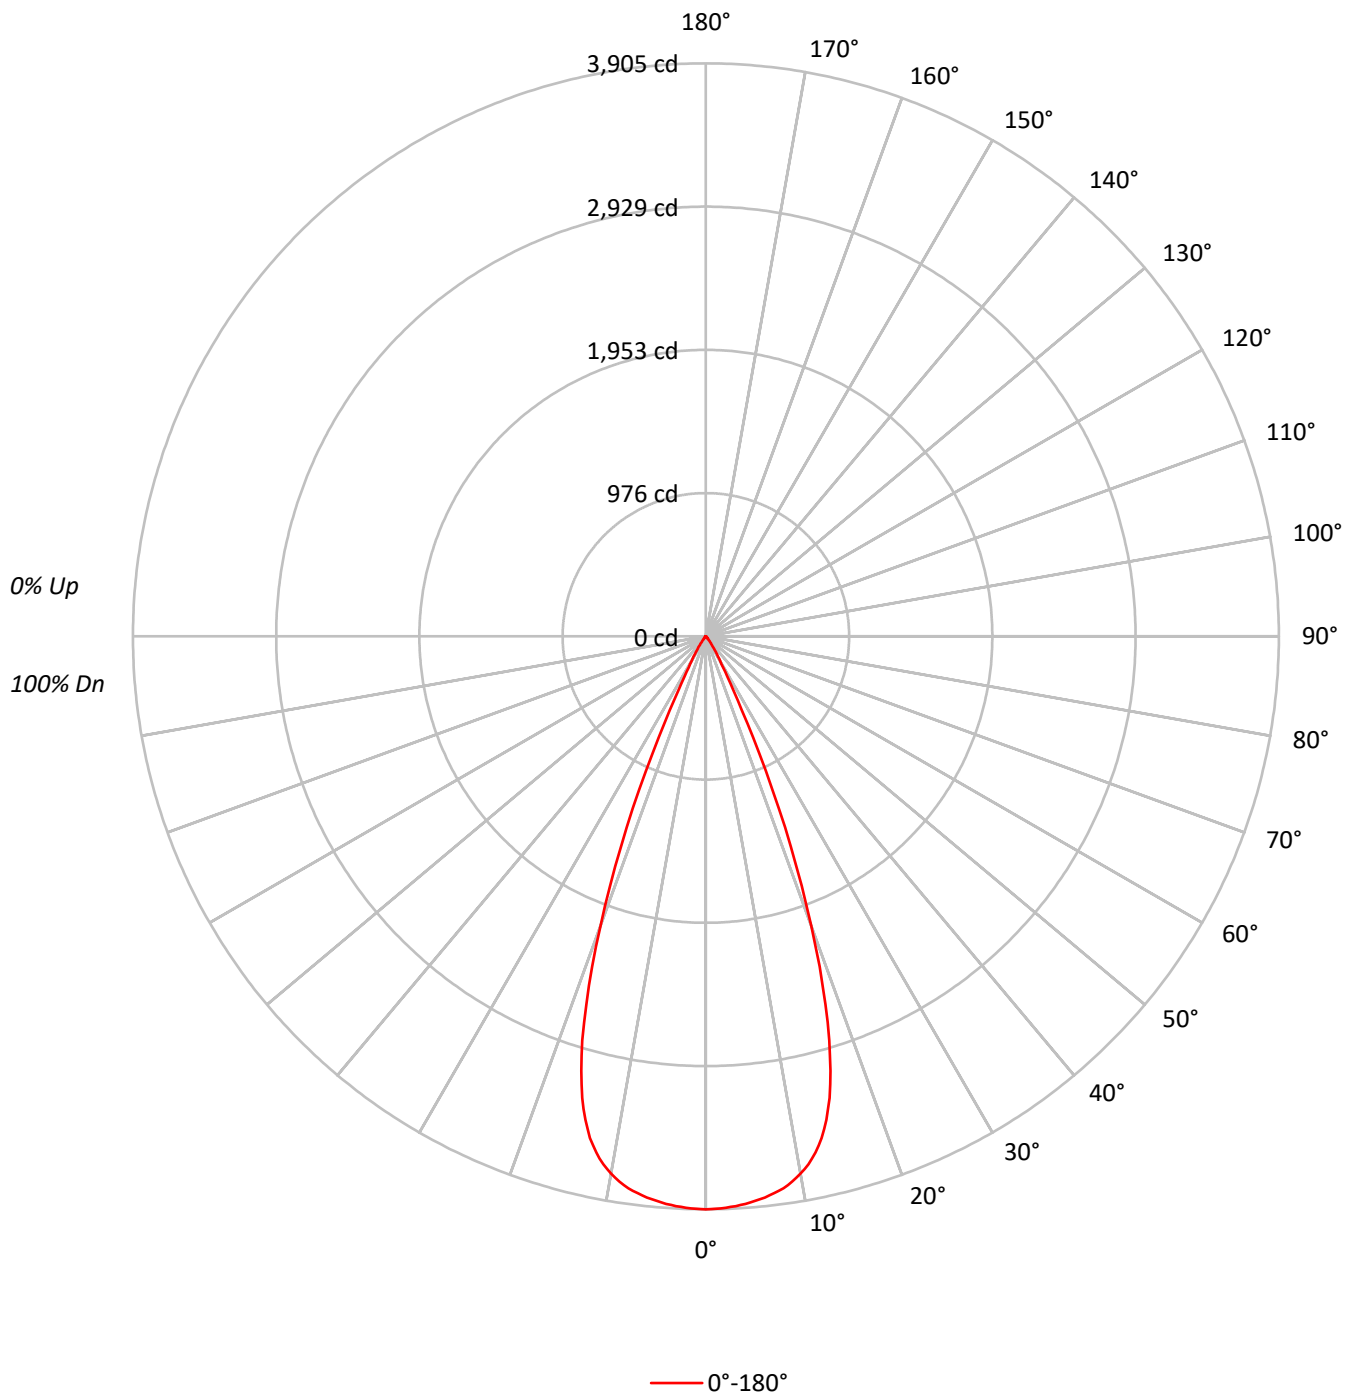

TEST NUMBER: P1267840

CATALOG NUMBER: P3AS17R409735DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	112	110	109		112	110	109	107		106	105	104		103	102	101		99	98	98
2	111	107	104	101		109	105	102	100		102	100	98		99	97	96		96	95	94
3	107	102	98	95		105	100	97	94		98	95	93		96	93	91		93	91	90
4	103	97	93	90		101	96	92	89		94	91	88		92	89	87		90	88	86
5	99	93	89	85		98	92	88	85		91	87	84		89	86	84		88	85	83
6	96	89	85	81		95	89	84	81		87	83	81		86	83	80		85	82	80
7	93	86	81	78		92	85	81	78		84	80	77		83	80	77		82	79	77
8	90	83	78	75		89	82	78	75		81	77	75		80	77	74		79	76	74
9	87	80	75	72		86	79	75	72		78	75	72		78	74	72		77	74	71
10	84	77	72	70		83	77	72	69		76	72	69		75	72	69		74	71	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	856335
5°	850163
10°	827907
15°	739550
20°	490369
25°	183712
30°	49147
35°	19220
40°	6899
45°	3287
50°	989
55°	459
60°	263
65°	311
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3287 cd/sqm

TEST NUMBER: P1267840

CATALOG NUMBER: P3AS17R409735DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	364.5	21.7
10°-20°	863.2	51.4
20°-30°	391.4	23.3
30°-40°	50.7	3.0
40°-50°	8.8	0.5
50°-60°	1.0	0.1
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1619.1	96.4
0°-40°	1669.8	99.4
0°-60°	1679.7	100.0
0°-90°	1680.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1680.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3905	
5°	3862	364
15°	3258	863
25°	759	391
35°	72	51
45°	11	9
55°	1	1
65°	1	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1267840

CATALOG NUMBER: P3AS17R409735DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3905.2
1°	3902.8
2°	3897.0
3°	3888.1
4°	3877.0
5°	3862.3
6°	3845.2
7°	3824.0
8°	3798.2
9°	3762.9
10°	3718.2
11°	3665.8
12°	3595.8
13°	3509.4
14°	3396.5
15°	3257.7
16°	3080.6
17°	2878.9
18°	2636.6
19°	2380.8
20°	2101.4
21°	1822.0
22°	1546.8
23°	1272.7
24°	1003.4
25°	759.3
26°	562.3
27°	411.7
28°	309.4
29°	240.5
30°	194.1
31°	160.6
32°	134.1
32.5°	122.3
33°	110.6
34°	90.0
35°	71.8
36°	56.5
37°	44.7
37.5°	40.0
38°	35.3
39°	29.4
40°	24.1
42.5°	15.9
45°	10.6



TEST NUMBER: P1267840

CATALOG NUMBER: P3AS17R409735DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	6.5
50°	2.9
52.5°	1.2
55°	1.2
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)