

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1267961

Luminaire Tested: P3AS17R609735DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1267961
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R609735DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1262.0 lumens
Efficiency: N/A
Efficacy: 59.5 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1267961

CATALOG NUMBER: P3AS17R609735DE010 E3DL1WMH

Luminous Intensity Polar Plot

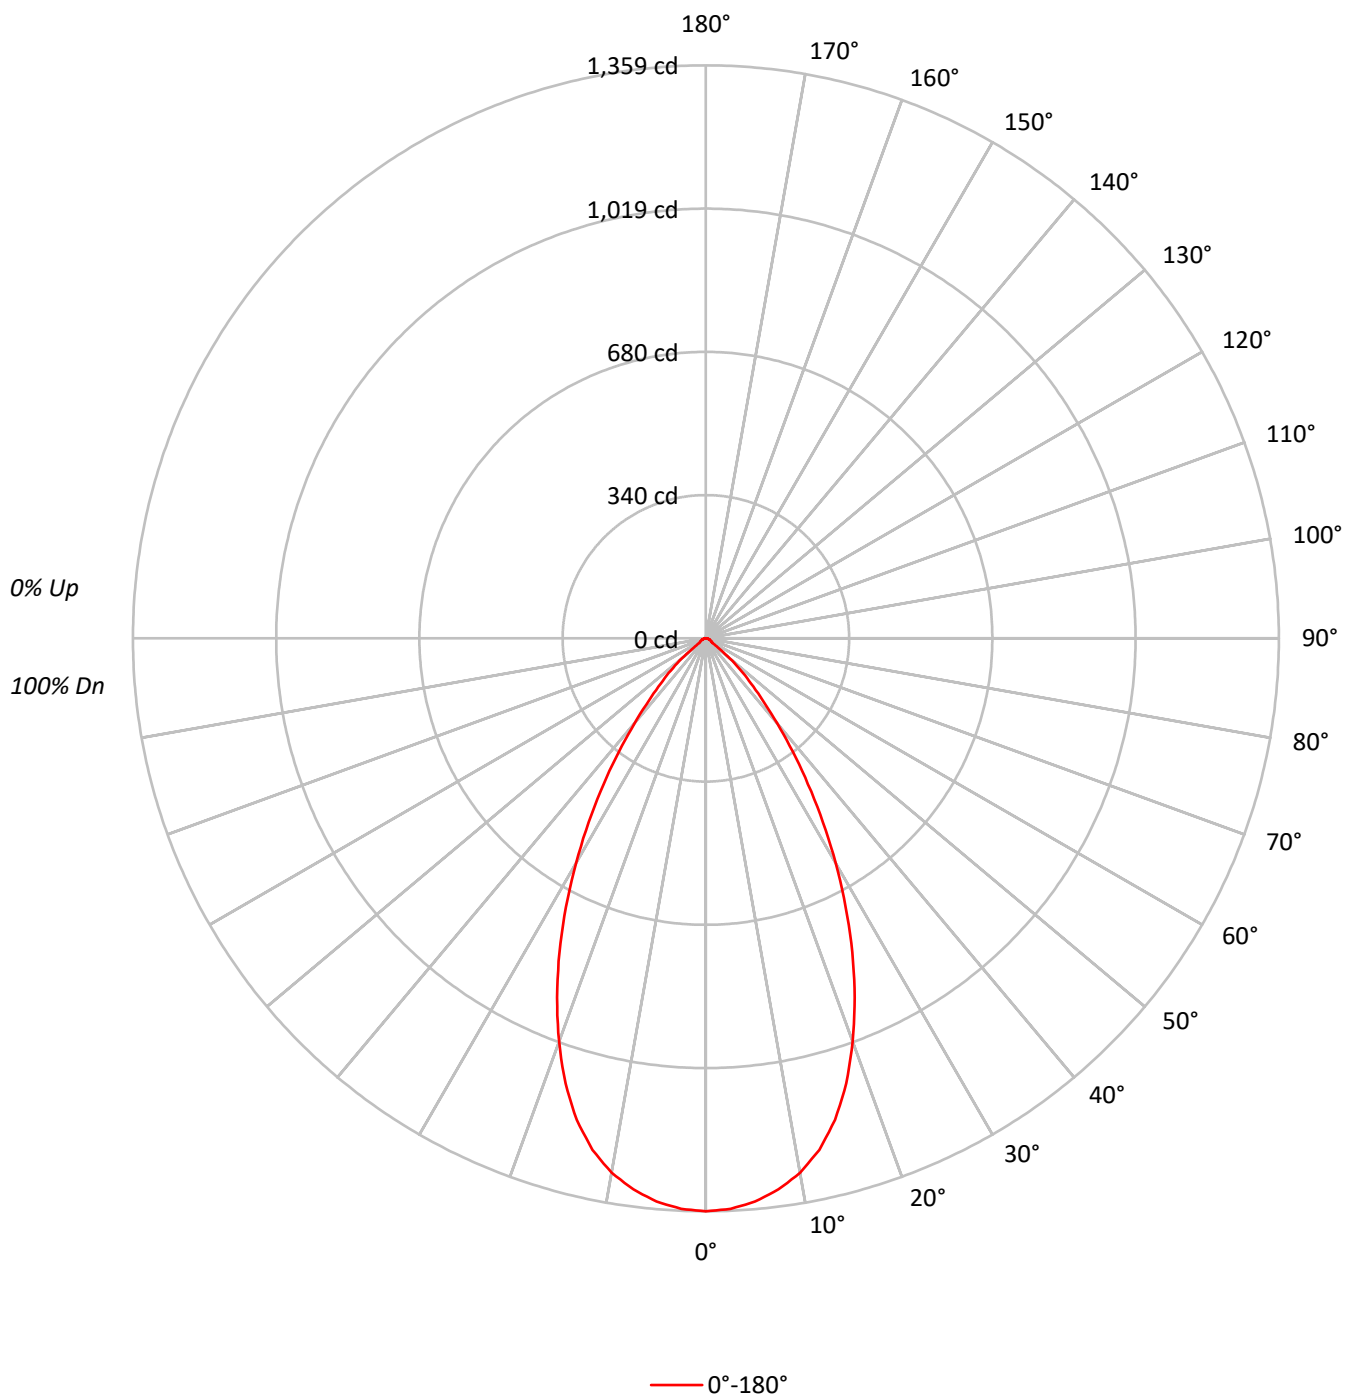

TEST NUMBER: P1267961

CATALOG NUMBER: P3AS17R609735DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93		
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85		
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79		
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73		
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68		
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63		
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59		
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55		
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51		
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	298002
5°	295179
10°	286568
15°	268492
20°	237624
25°	198786
30°	155796
35°	113020
40°	75198
45°	46858
50°	25381
55°	7340
60°	6842
65°	6226
70°	6155
75°	6100
80°	6061
85°	6038

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 46858 cd/sqm

TEST NUMBER: P1267961

CATALOG NUMBER: P3AS17R609735DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.3	10.0
10°-20°	328.1	26.0
20°-30°	374.0	29.6
30°-40°	265.2	21.0
40°-50°	120.3	9.5
50°-60°	25.5	2.0
60°-70°	12.3	1.0
70°-80°	7.6	0.6
80°-90°	2.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	828.4	65.6
0°-40°	1093.6	86.7
0°-60°	1239.5	98.2
0°-90°	1262.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1262.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1359	
5°	1341	126
15°	1183	328
25°	822	374
35°	422	265
45°	151	120
55°	19	26
65°	12	12
75°	7	8
85°	2	3
90°	0	

TEST NUMBER: P1267961

CATALOG NUMBER: P3AS17R609735DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1359.0
2.5°	1354.2
5°	1341.0
7.5°	1318.2
10°	1287.0
12.5°	1242.6
15°	1182.7
17.5°	1107.1
20°	1018.3
22.5°	922.4
25°	821.6
27.5°	718.5
30°	615.3
32.5°	517.0
35°	422.2
37.5°	338.2
40°	262.7
42.5°	199.1
45°	151.1
47.5°	112.7
50°	74.4
52.5°	34.8
55°	19.2
57.5°	16.8
60°	15.6
62.5°	14.4
65°	12.0
67.5°	10.8
70°	9.6
72.5°	8.4
75°	7.2
77.5°	6.0
80°	4.8
82.5°	3.6
85°	2.4
87.5°	1.2
90°	0.0

(END OF REPORT)