

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268129

Luminaire Tested: P3AS20R259735D010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268129
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259735D010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2129.0 lumens
Efficiency: N/A
Efficacy: 73.9 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268129

CATALOG NUMBER: P3AS20R259735D010 E3D1WMH

Luminous Intensity Polar Plot

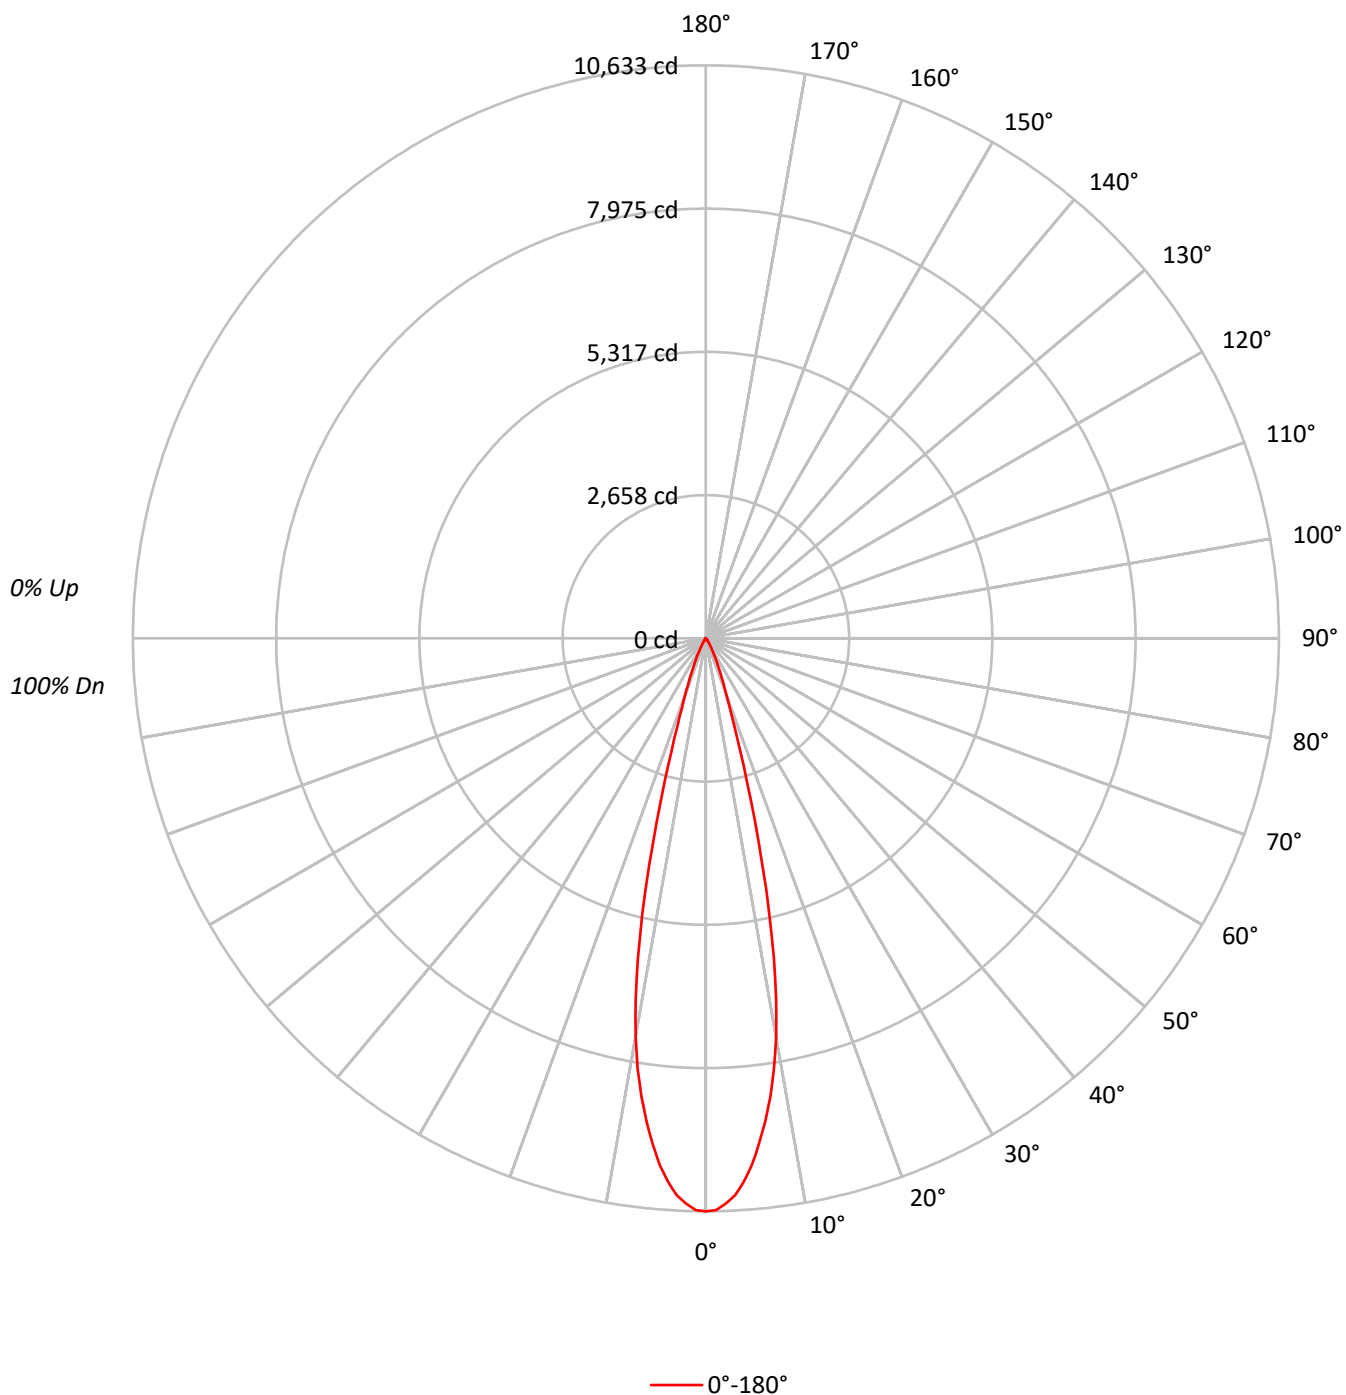

TEST NUMBER: P1268129

CATALOG NUMBER: P3AS20R259735D010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	110	108	107	106	105		104	103	102		100
2	112	108	106	103	110	107	104	102	104	102	100		101	99	98		98
3	109	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	106	101	97	94	104	100	96	94	98	95	92		96	93	91		94
5	103	97	93	91	101	96	93	90	95	92	90		93	91	89		92
6	100	94	90	88	99	94	90	87	92	89	87		91	88	86		90
7	98	92	88	85	97	91	87	85	90	87	84		89	86	84		88
8	95	89	85	83	94	89	85	83	88	85	82		87	84	82		86
9	93	87	83	81	92	86	83	80	86	83	80		85	82	80		84
10	91	85	81	79	90	84	81	79	84	81	78		83	80	78		83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2331655
5°	2159933
10°	1671178
15°	798211
20°	263176
25°	110934
30°	42994
35°	18605
40°	6183
45°	2884
50°	1058
55°	573
60°	351
65°	415
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2884 cd/sqm

TEST NUMBER: P1268129

CATALOG NUMBER: P3AS20R259735D010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	862.5	40.5
10°-20°	981.0	46.1
20°-30°	228.0	10.7
30°-40°	47.8	2.2
40°-50°	7.7	0.4
50°-60°	1.3	0.1
60°-70°	0.7	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2071.5	97.3
0°-40°	2119.3	99.5
0°-60°	2128.3	100.0
0°-90°	2129.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2129.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10633	
5°	9813	863
15°	3516	981
25°	458	228
35°	70	48
45°	9	8
55°	2	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1268129

CATALOG NUMBER: P3AS20R259735D010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	10633.2
1°	10611.6
2°	10501.2
3°	10346.0
4°	10109.1
5°	9812.6
6°	9432.1
7°	9033.8
8°	8586.8
9°	8082.8
10°	7505.4
11°	6836.1
12°	6068.1
13°	5226.7
14°	4346.7
15°	3516.1
16°	2781.2
17°	2166.8
18°	1704.4
19°	1363.2
20°	1127.8
21°	942.5
22°	791.2
23°	660.8
24°	552.7
25°	458.5
27.5°	271.7
30°	169.8
32.5°	108.8
35°	69.5
37.5°	41.7
40°	21.6
42.5°	13.9
45°	9.3
47.5°	5.4
50°	3.1
52.5°	1.5
55°	1.5
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.8
67.5°	0.8
70°	0.0
72.5°	0.0

TEST NUMBER: P1268129

CATALOG NUMBER: P3AS20R259735D010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)