

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268264

Luminaire Tested: P3AS20R459735D010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268264
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R459735D010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 3500K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1136.0 lumens
Efficiency: N/A
Efficacy: 39.4 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268264

CATALOG NUMBER: P3AS20R459735D010 E3DLP1WMH

Luminous Intensity Polar Plot

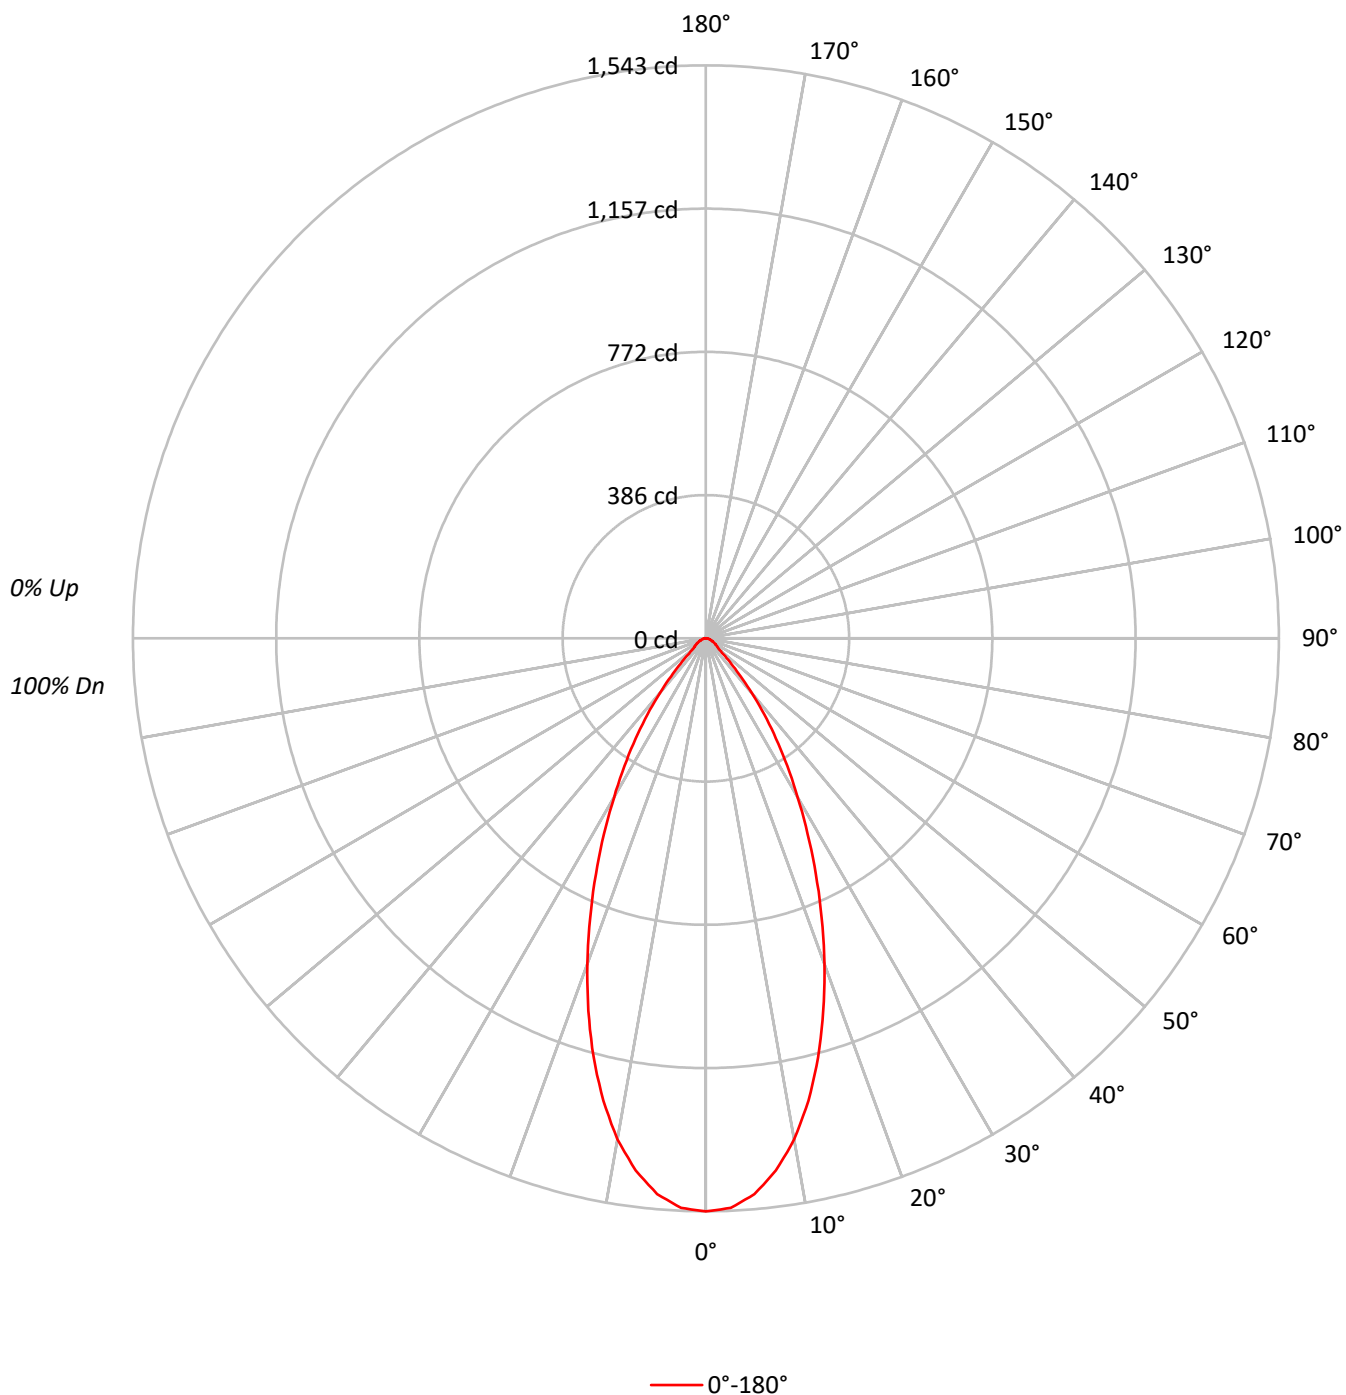

TEST NUMBER: P1268264

CATALOG NUMBER: P3AS20R459735D010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	102	95	90	85	100	93	89	85	91	87	83		88	85	82		86
4	96	88	83	78	94	87	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	87	78	72	67	85	77	71	67	75	70	66		74	69	66		73
7	83	73	67	63	81	72	67	63	71	66	62		70	65	62		69
8	79	69	63	59	77	68	63	59	67	62	58		66	62	58		65
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	338372
5°	330662
10°	305027
15°	265223
20°	217882
25°	169534
30°	125184
35°	88098
40°	54989
45°	29771
50°	16102
55°	13839
60°	12411
65°	10637
70°	9104
75°	9320
80°	7956
85°	7799

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 29771 cd/sqm

TEST NUMBER: P1268264

CATALOG NUMBER: P3AS20R459735D010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.1	12.2
10°-20°	323.0	28.4
20°-30°	320.6	28.2
30°-40°	206.5	18.2
40°-50°	79.5	7.0
50°-60°	32.3	2.8
60°-70°	20.4	1.8
70°-80°	11.0	1.0
80°-90°	3.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	782.7	68.9
0°-40°	989.2	87.1
0°-60°	1101.1	96.9
0°-90°	1136.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1136.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1543	
5°	1502	139
15°	1168	323
25°	701	321
35°	329	207
45°	96	80
55°	36	32
65°	20	20
75°	11	11
85°	3	3
90°	0	

TEST NUMBER: P1268264

CATALOG NUMBER: P3AS20R459735D010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1543.1
2.5°	1535.2
5°	1502.2
7.5°	1445.5
10°	1369.9
12.5°	1275.4
15°	1168.3
17.5°	1051.8
20°	933.7
22.5°	814.1
25°	700.7
27.5°	593.6
30°	494.4
32.5°	407.8
35°	329.1
37.5°	258.2
40°	192.1
42.5°	138.6
45°	96.0
47.5°	64.6
50°	47.2
52.5°	39.4
55°	36.2
57.5°	31.5
60°	28.3
62.5°	23.6
65°	20.5
67.5°	17.3
70°	14.2
72.5°	12.6
75°	11.0
77.5°	7.9
80°	6.3
82.5°	4.7
85°	3.1
87.5°	1.6
90°	0.0

(END OF REPORT)