

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268268

Luminaire Tested: P3AS20R509735D010 E3CD1MB

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1268268  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS20R509735D010 E3CD1MB  
Description: 3in Adjustable LED luminaire with, R50 optic, 3500K CCT AND, 97CRI , E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2156.0 lumens  
Efficiency: N/A  
Efficacy: 74.9 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1268268  
CATALOG NUMBER: P3AS20R509735D010 E3CD1MB

### Luminous Intensity Polar Plot

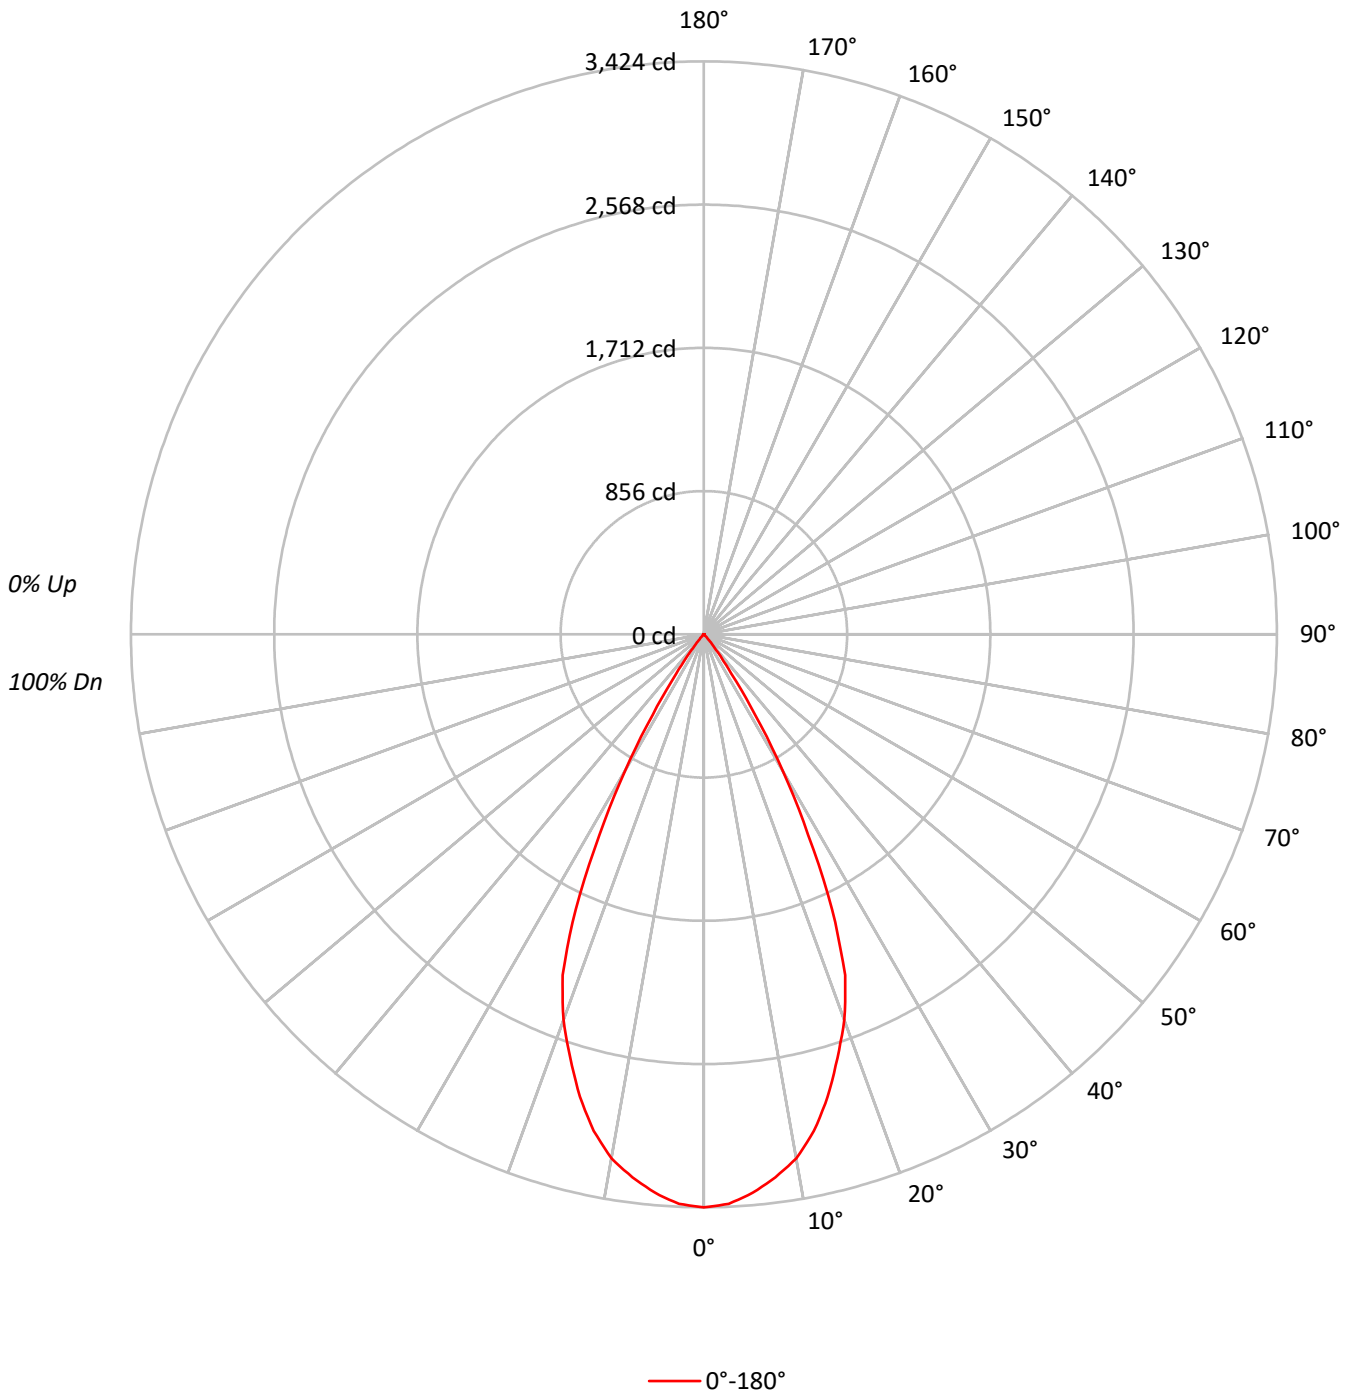



TEST NUMBER: P1268268  
 CATALOG NUMBER: P3AS20R509735D010 E3CD1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	96	96	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	91	91	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	86	86	86	85
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	82	82	82	80
5	96	89	84	80	94	88	83	79	86	82	79	84	81	78	83	80	77	77	77	77	76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	73	73	73	73	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	70	70	70	69
8	85	76	71	67	83	76	71	67	75	70	67	74	70	67	73	69	66	66	66	66	65
9	81	73	68	64	80	72	67	64	71	67	64	71	66	63	70	66	63	63	63	63	62
10	78	69	64	61	77	69	64	61	68	64	61	68	63	61	67	63	60	60	60	60	59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	750861
5°	737440
10°	708070
15°	649289
20°	572533
25°	438848
30°	238594
35°	76774
40°	18034
45°	2450
50°	2149
55°	2409
60°	2061
65°	2439
70°	2052
75°	2711
80°	2020
85°	4026

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 85°  
 Luminance: 4026 cd/sqm



TEST NUMBER: P1268268  
 CATALOG NUMBER: P3AS20R509735D010 E3CD1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	314.4	14.6
10°-20°	795.0	36.9
20°-30°	796.2	36.9
30°-40°	223.9	10.4
40°-50°	13.5	0.6
50°-60°	5.1	0.2
60°-70°	4.1	0.2
70°-80°	2.7	0.1
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1905.6	88.4
0°-40°	2129.5	98.8
0°-60°	2148.1	99.6
0°-90°	2156.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2156.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3424	
5°	3350	314
15°	2860	795
25°	1814	796
35°	287	224
45°	8	14
55°	6	5
65°	5	4
75°	3	3
85°	2	1
90°	0	



TEST NUMBER: P1268268  
CATALOG NUMBER: P3AS20R509735D010 E3CD1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3424.2
2.5°	3406.9
5°	3350.2
7.5°	3273.0
10°	3180.0
12.5°	3039.7
15°	2860.1
17.5°	2653.7
20°	2453.5
22.5°	2204.6
25°	1813.8
27.5°	1350.5
30°	942.3
32.5°	568.9
35°	286.8
37.5°	135.5
40°	63.0
42.5°	23.6
45°	7.9
47.5°	6.3
50°	6.3
52.5°	6.3
55°	6.3
57.5°	4.7
60°	4.7
62.5°	4.7
65°	4.7
67.5°	3.2
70°	3.2
72.5°	3.2
75°	3.2
77.5°	1.6
80°	1.6
82.5°	1.6
85°	1.6
87.5°	0.0
90°	0.0

(END OF REPORT)