

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268316

Luminaire Tested: P3AS20R559735D010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268316
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R559735D010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1333.0 lumens
Efficiency: N/A
Efficacy: 46.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268316

CATALOG NUMBER: P3AS20R559735D010 E3DLD1WMH

Luminous Intensity Polar Plot

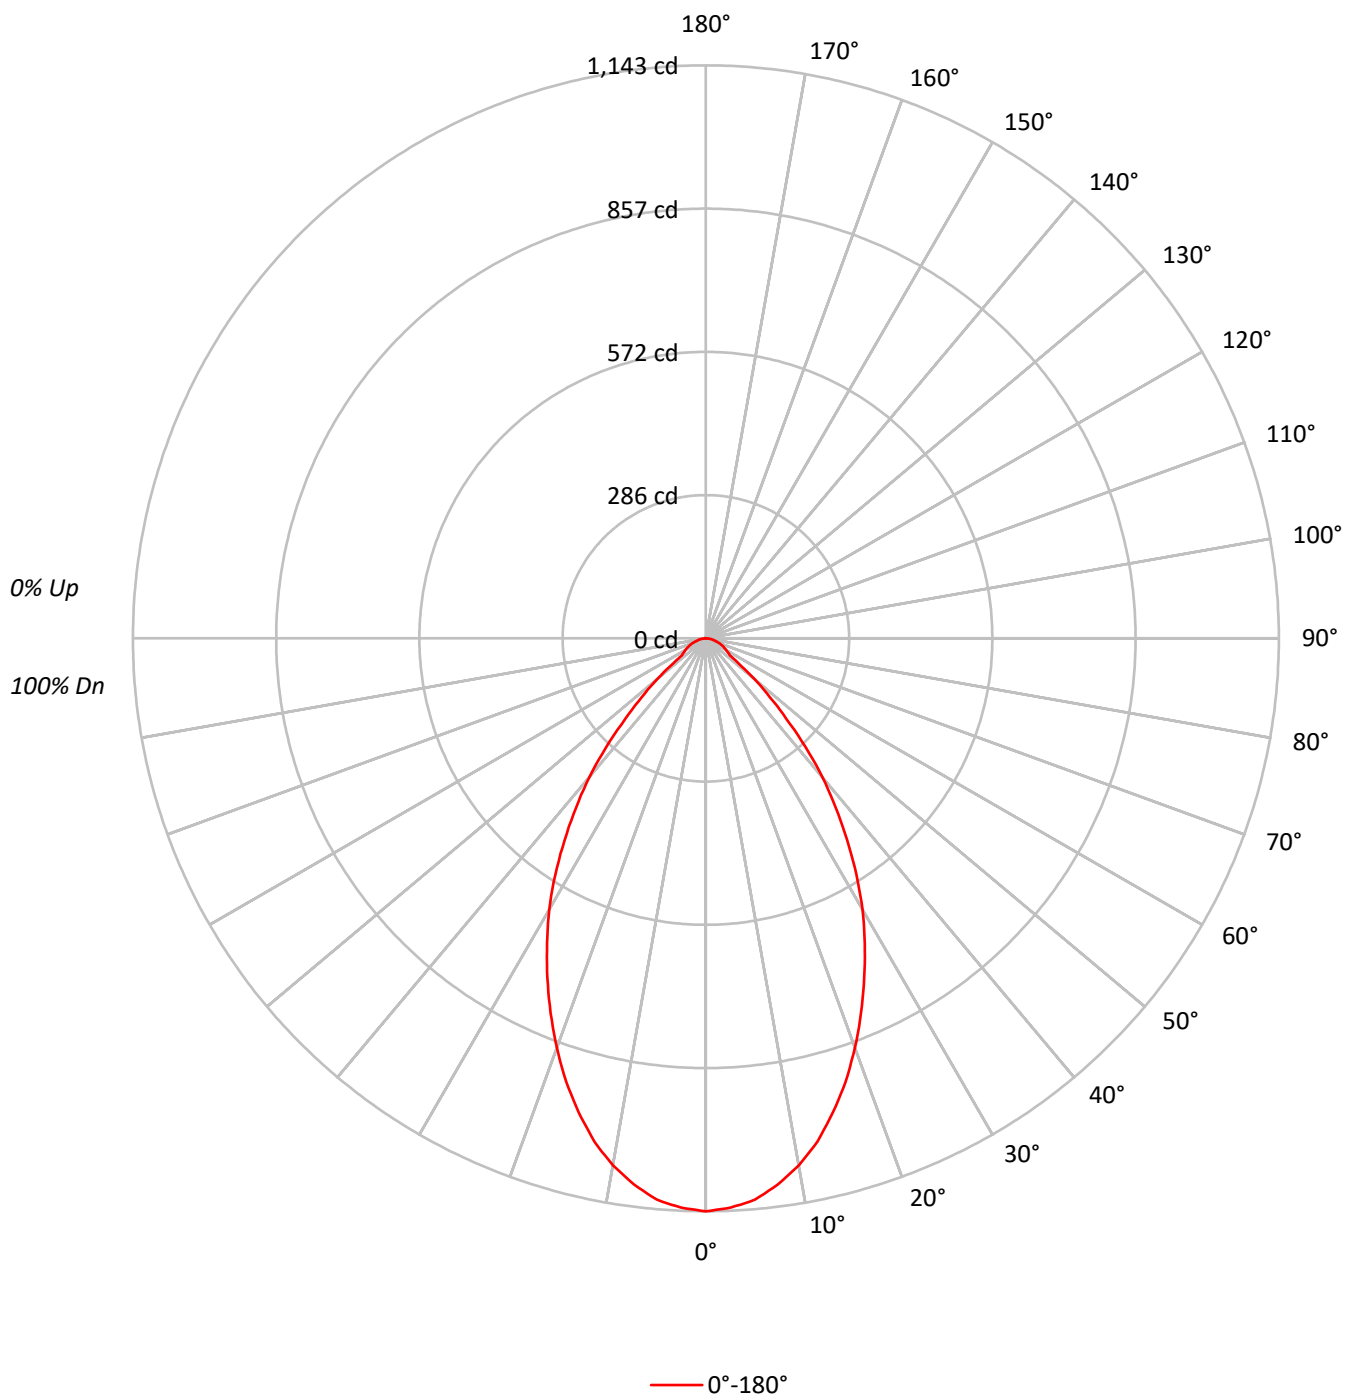

TEST NUMBER: P1268316

CATALOG NUMBER: P3AS20R559735D010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		91
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		82
3	99	91	85	81	97	90	84	80	87	82	79		85	81	77		74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		68
5	87	77	71	66	85	76	70	65	75	69	65		73	68	64		62
6	82	72	65	60	80	71	64	60	69	64	59		68	63	59		57
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		52
8	73	62	55	51	72	62	55	51	60	55	50		59	54	50		48
9	69	58	51	47	68	58	51	47	57	51	47		56	50	46		45
10	65	55	48	44	64	54	48	44	53	47	43		52	47	43		42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	250638
5°	247435
10°	237671
15°	222317
20°	202808
25°	180930
30°	158252
35°	131490
40°	103651
45°	70302
50°	42984
55°	22288
60°	20700
65°	19613
70°	18144
75°	16013
80°	15911
85°	11825

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 70302 cd/sqm

TEST NUMBER: P1268316

CATALOG NUMBER: P3AS20R559735D010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.4	7.9
10°-20°	273.7	20.5
20°-30°	342.7	25.7
30°-40°	306.0	23.0
40°-50°	179.2	13.4
50°-60°	61.9	4.6
60°-70°	37.4	2.8
70°-80°	20.7	1.6
80°-90°	6.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	721.9	54.2
0°-40°	1027.8	77.1
0°-60°	1268.9	95.2
0°-90°	1333.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1333.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1143	
5°	1124	105
15°	979	274
25°	748	343
35°	491	306
45°	227	179
55°	58	62
65°	38	37
75°	19	21
85°	5	6
90°	0	

TEST NUMBER: P1268316

CATALOG NUMBER: P3AS20R559735D010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1143.0
2.5°	1136.7
5°	1124.1
7.5°	1098.9
10°	1067.4
12.5°	1028.1
15°	979.3
17.5°	927.3
20°	869.1
22.5°	809.2
25°	747.8
27.5°	686.4
30°	625.0
32.5°	558.9
35°	491.2
37.5°	425.1
40°	362.1
42.5°	294.4
45°	226.7
47.5°	173.2
50°	126.0
52.5°	81.9
55°	58.3
57.5°	52.0
60°	47.2
62.5°	42.5
65°	37.8
67.5°	33.1
70°	28.3
72.5°	23.6
75°	18.9
77.5°	15.7
80°	12.6
82.5°	7.9
85°	4.7
87.5°	3.1
90°	0.0

(END OF REPORT)