

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268324

Luminaire Tested: P3AS20R609735D010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268324
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R609735D010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2036.0 lumens
Efficiency: N/A
Efficacy: 70.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268324

CATALOG NUMBER: P3AS20R609735D010 E3CB1MMS

Luminous Intensity Polar Plot

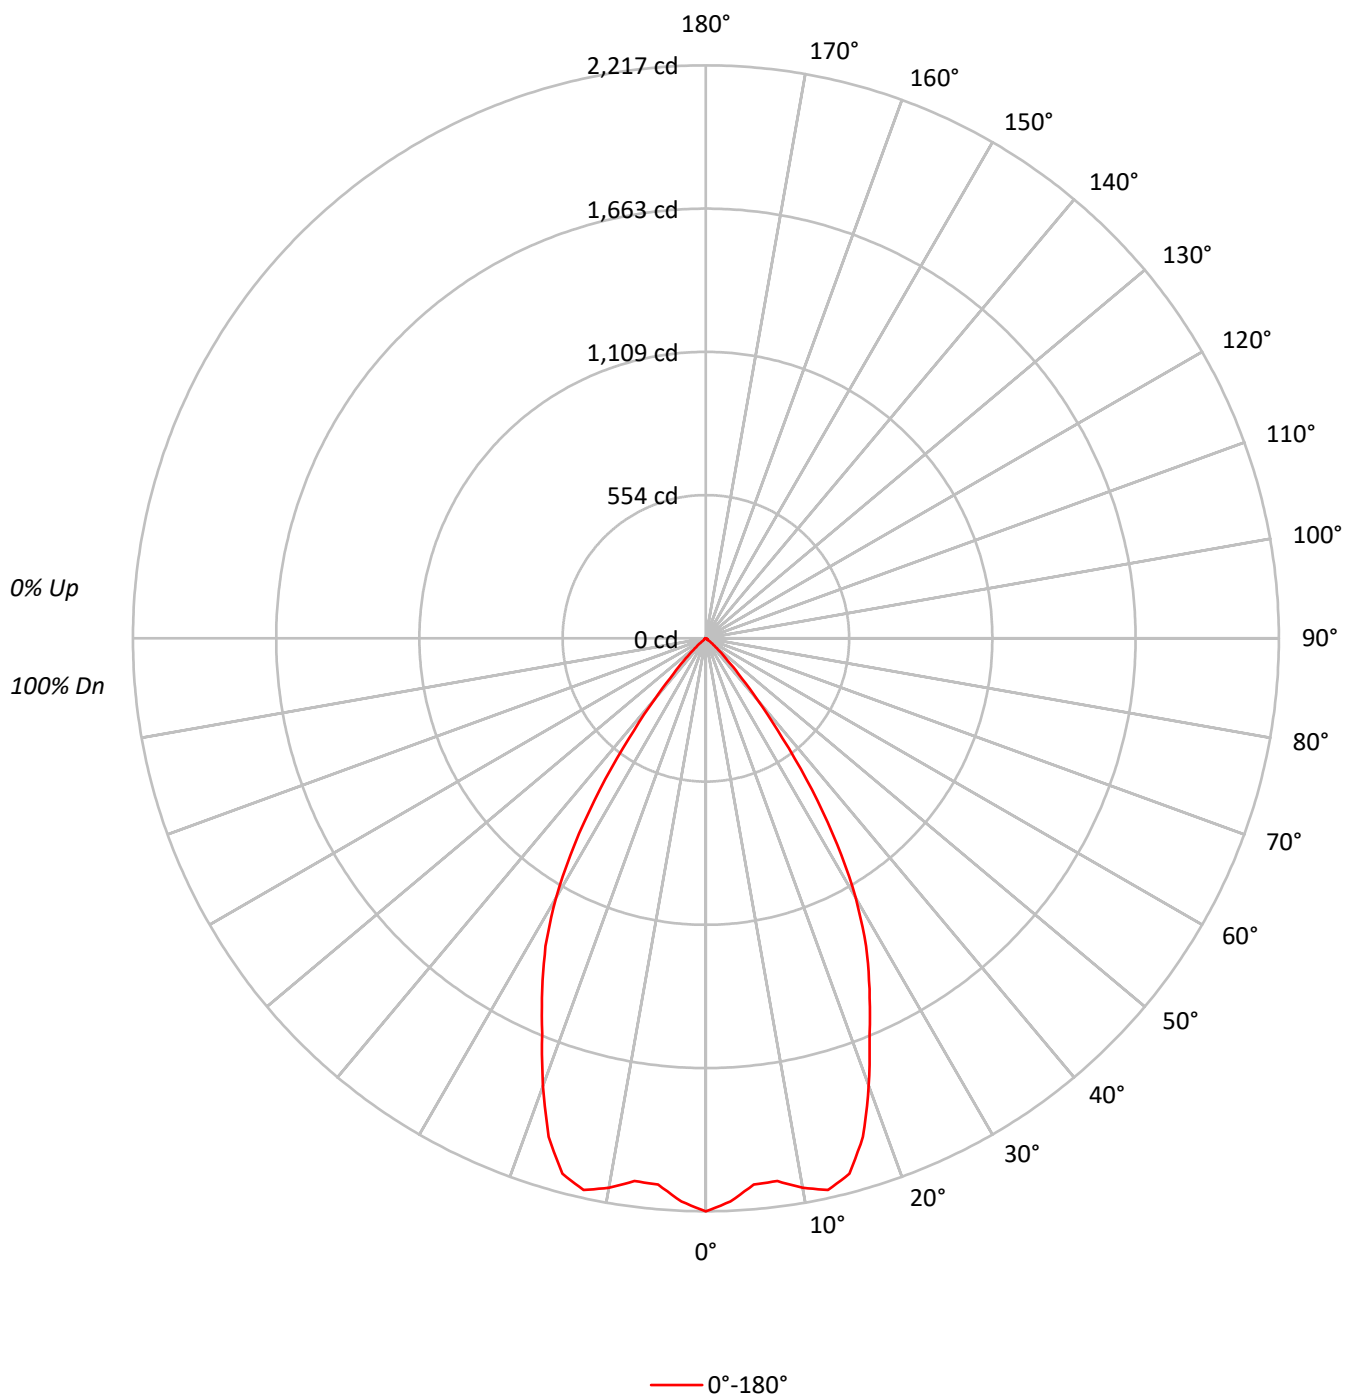

TEST NUMBER: P1268324

CATALOG NUMBER: P3AS20R609735D010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	100	98		97
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	96	91	88	101	95	90	87	92	89	85		90	87	84		88
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83
5	93	84	79	74	91	84	78	74	82	77	73		80	76	73		79
6	88	79	73	69	87	79	73	69	77	72	68		76	71	68		74
7	84	75	69	64	82	74	68	64	73	68	64		71	67	64		70
8	80	70	64	60	78	70	64	60	69	64	60		68	63	60		67
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	62	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	486189
5°	466893
10°	480708
15°	486881
20°	429931
25°	362319
30°	293868
35°	191373
40°	87908
45°	33709
50°	11292
55°	3020
60°	2763
65°	2439
70°	1988
75°	2626
80°	2020
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 33709 cd/sqm

TEST NUMBER: P1268324

CATALOG NUMBER: P3AS20R609735D010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	204.2	10.0
10°-20°	587.3	28.8
20°-30°	685.1	33.6
30°-40°	442.1	21.7
40°-50°	99.1	4.9
50°-60°	9.9	0.5
60°-70°	4.7	0.2
70°-80°	2.7	0.1
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1476.5	72.5
0°-40°	1918.6	94.2
0°-60°	2027.6	99.6
0°-90°	2036.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2036.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2217	
5°	2121	204
15°	2145	587
25°	1498	685
35°	715	442
45°	109	99
55°	8	10
65°	5	5
75°	3	3
85°	2	1
90°	0	

TEST NUMBER: P1268324

CATALOG NUMBER: P3AS20R609735D010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2217.2
2.5°	2181.0
5°	2121.1
7.5°	2118.0
10°	2158.9
12.5°	2185.7
15°	2144.7
17.5°	2021.9
20°	1842.4
22.5°	1655.0
25°	1497.5
27.5°	1343.2
30°	1160.6
32.5°	946.4
35°	714.9
37.5°	488.2
40°	307.1
42.5°	184.2
45°	108.7
47.5°	63.0
50°	33.1
52.5°	11.0
55°	7.9
57.5°	6.3
60°	6.3
62.5°	4.7
65°	4.7
67.5°	4.7
70°	3.1
72.5°	3.1
75°	3.1
77.5°	1.6
80°	1.6
82.5°	1.6
85°	1.6
87.5°	0.0
90°	0.0

(END OF REPORT)