

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268722

Luminaire Tested: P3AS02R509740DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268722
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R509740DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R50 optic, 4000K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 322.9 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268722
CATALOG NUMBER: P3AS02R509740DE010 E3CB1MMS

Luminous Intensity Polar Plot

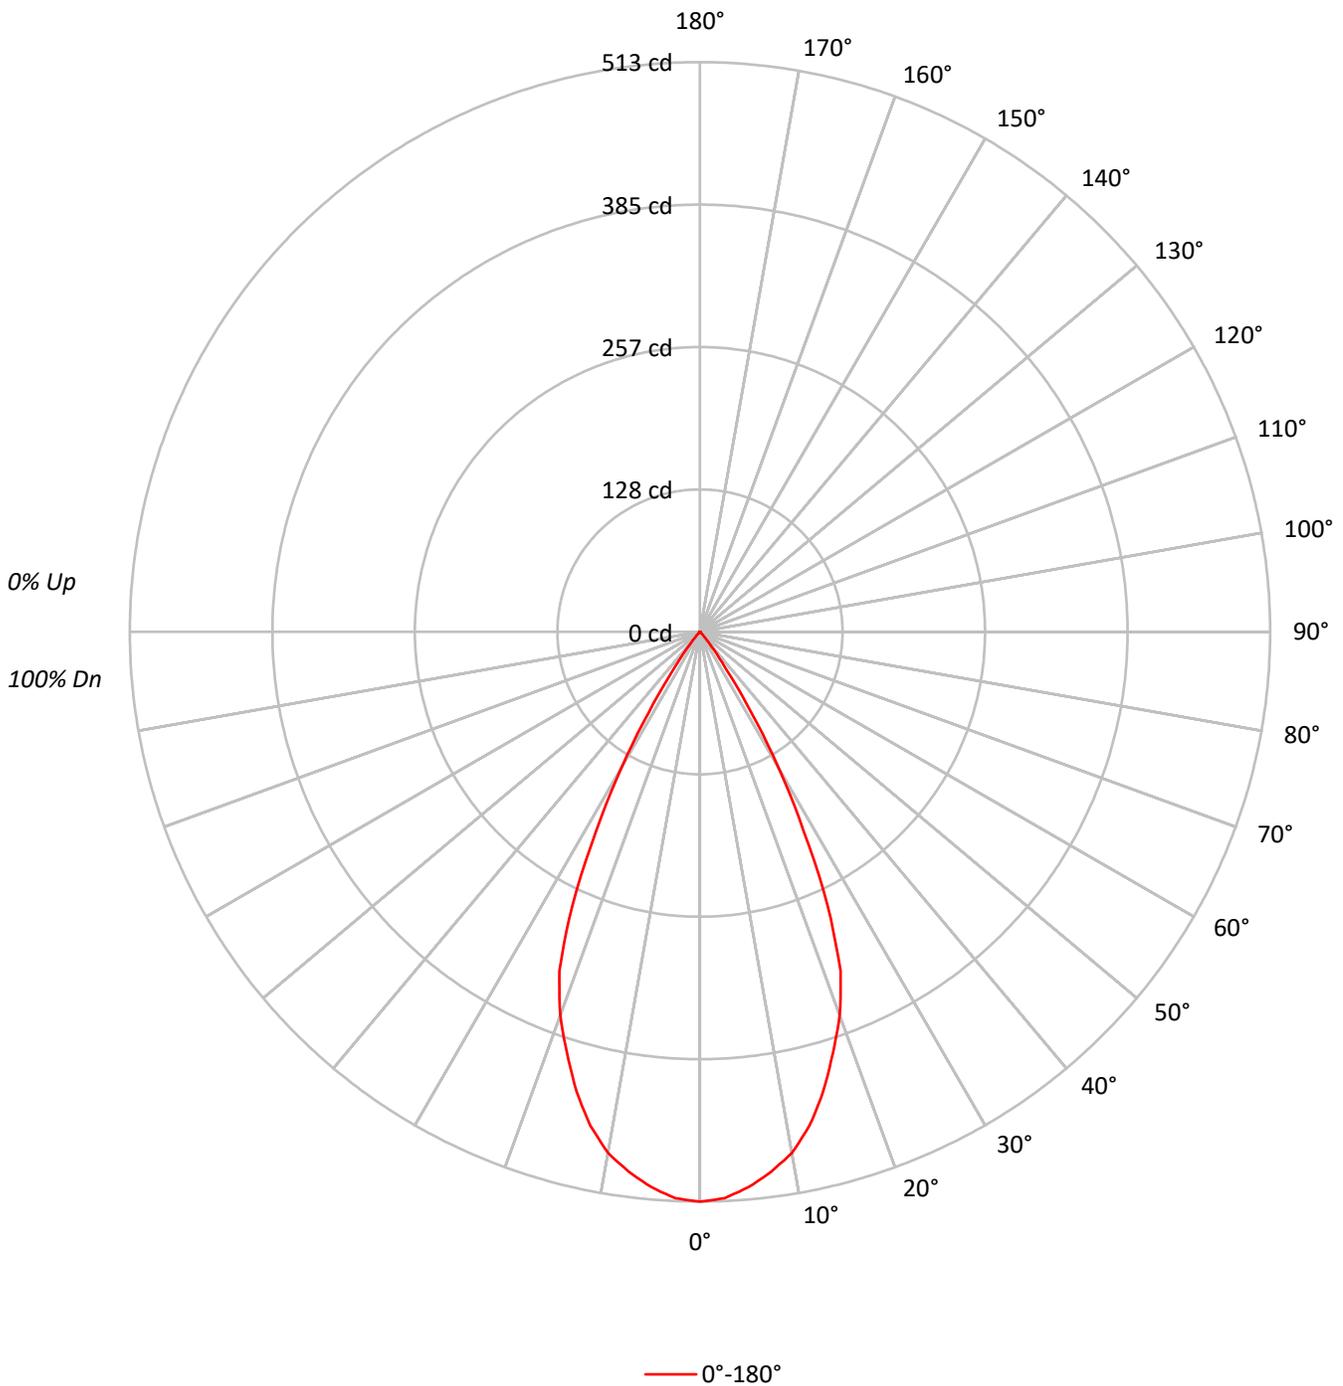



TEST NUMBER: P1268722

CATALOG NUMBER: P3AS02R509740DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	97	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90	90	90	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85
4	100	94	89	85	99	93	88	85	90	87	84	88	85	83	87	84	82	80	80	80	80
5	96	89	84	80	94	88	83	79	86	82	79	84	81	78	83	80	77	76	76	76	76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	73	72	72	72	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
8	85	76	71	67	83	76	71	67	75	70	67	74	70	67	73	69	66	65	65	65	65
9	81	73	68	64	80	72	67	64	71	67	64	71	66	63	70	66	63	62	62	62	62
10	78	69	64	61	77	69	64	61	68	64	61	68	63	61	67	63	60	59	59	59	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	112491
5°	110477
10°	106077
15°	97276
20°	85781
25°	65738
30°	35752
35°	11511
40°	2691
45°	372
50°	307
55°	344
60°	307
65°	363
70°	321
75°	424
80°	253
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 85°
 Luminance: 503 cd/sqm



TEST NUMBER: P1268722
 CATALOG NUMBER: P3AS02R509740DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.1	14.6
10°-20°	119.1	36.9
20°-30°	119.3	36.9
30°-40°	33.5	10.4
40°-50°	2.0	0.6
50°-60°	0.7	0.2
60°-70°	0.6	0.2
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	285.5	88.4
0°-40°	319.0	98.8
0°-60°	321.8	99.6
0°-90°	322.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	322.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	513	
5°	502	47
15°	428	119
25°	272	119
35°	43	34
45°	1	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1268722
CATALOG NUMBER: P3AS02R509740DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	513.0
2.5°	510.4
5°	501.9
7.5°	490.3
10°	476.4
12.5°	455.4
15°	428.5
17.5°	397.6
20°	367.6
22.5°	330.3
25°	271.7
27.5°	202.3
30°	141.2
32.5°	85.2
35°	43.0
37.5°	20.3
40°	9.4
42.5°	3.5
45°	1.2
47.5°	0.9
50°	0.9
52.5°	0.9
55°	0.9
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.2
80°	0.2
82.5°	0.2
85°	0.2
87.5°	0.0
90°	0.0

(END OF REPORT)