

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268731

Luminaire Tested: P3AS02R509740DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268731
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R509740DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R50 optic, 4000K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 328.0 lumens
Efficiency: N/A
Efficacy: 91.1 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268731

CATALOG NUMBER: P3AS02R509740DE010 E3D1WMH

Luminous Intensity Polar Plot

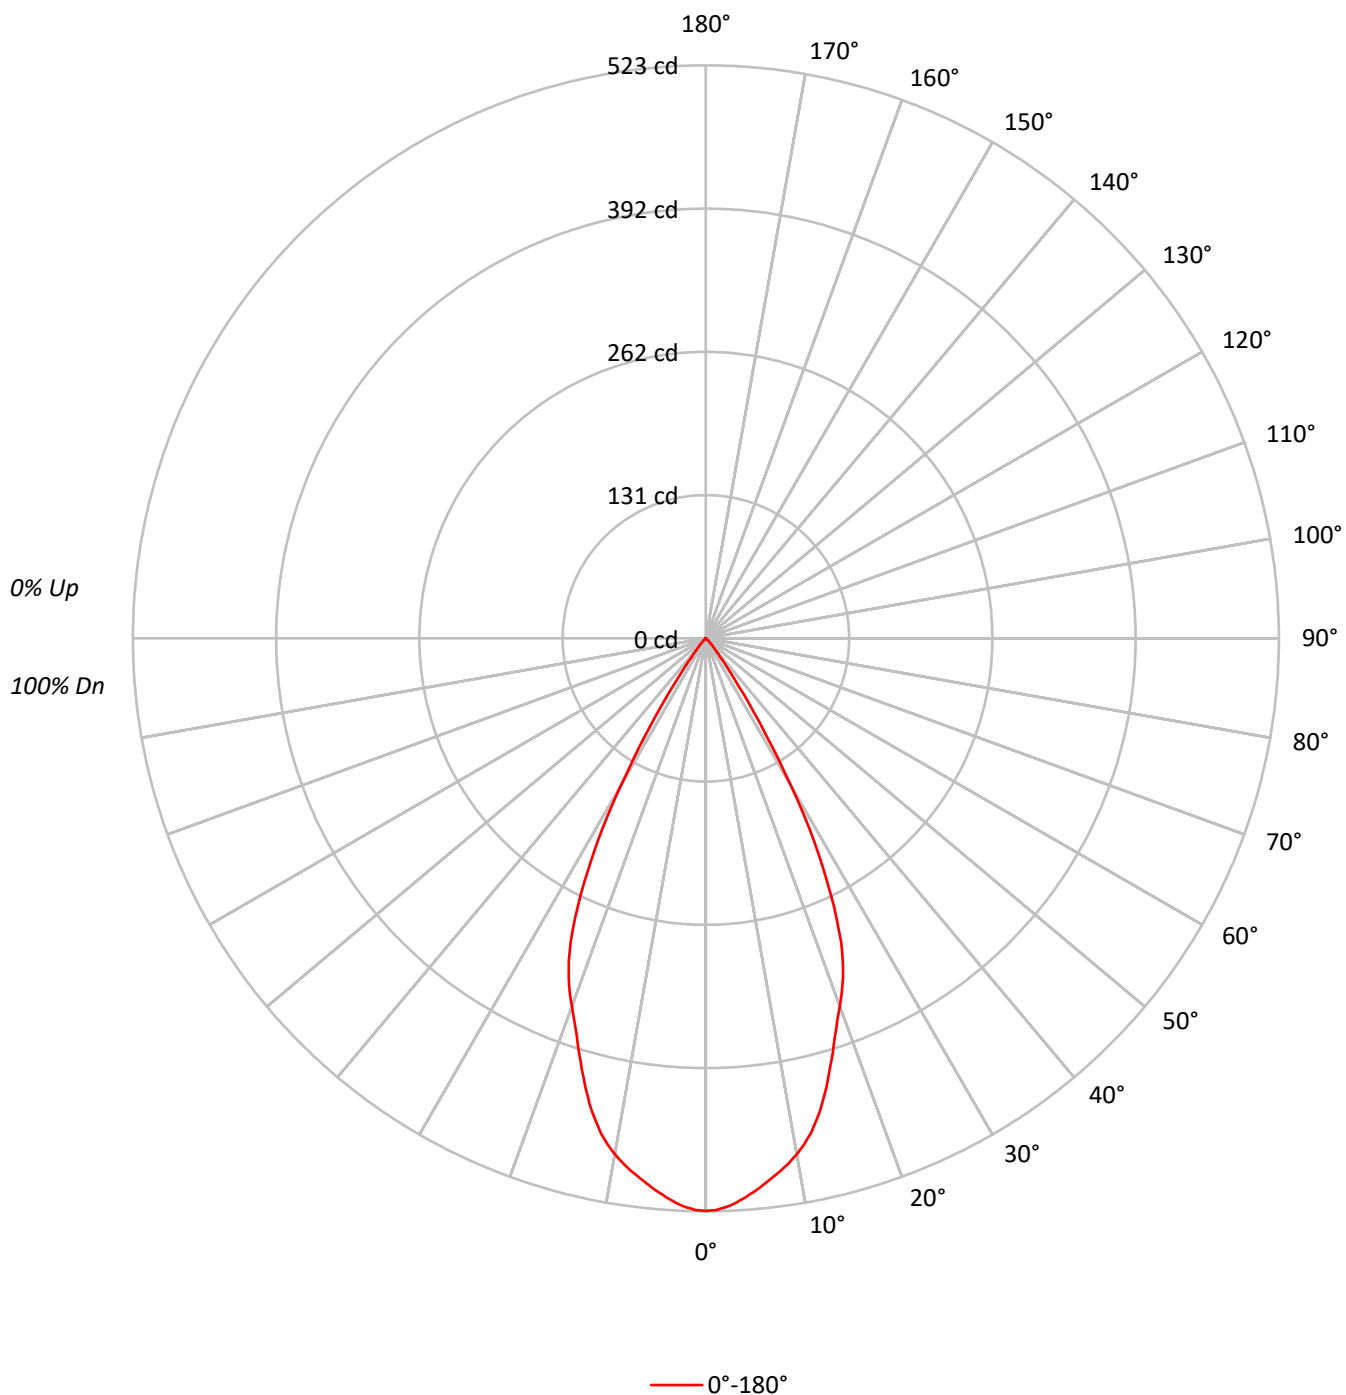

TEST NUMBER: P1268731

CATALOG NUMBER: P3AS02R509740DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	105	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	92	88	85	90	87	84		88	85	83		87
5	96	89	84	80	94	88	83	79	86	82	79		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	70		77	73	70		76
8	84	76	71	67	83	76	71	67	75	70	67		74	69	67		73
9	81	73	67	64	80	72	67	64	71	67	63		70	66	63		70
10	78	69	64	61	77	69	64	61	68	64	60		67	63	60		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	114618
5°	111578
10°	106478
15°	96391
20°	83401
25°	68399
30°	39297
35°	12207
40°	3292
45°	1147
50°	273
55°	76
60°	44
65°	52
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1147 cd/sqm

TEST NUMBER: P1268731

CATALOG NUMBER: P3AS02R509740DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.5	14.5
10°-20°	117.6	35.9
20°-30°	123.7	37.7
30°-40°	35.4	10.8
40°-50°	3.5	1.1
50°-60°	0.3	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	288.8	88.0
0°-40°	324.2	98.8
0°-60°	327.9	100.0
0°-90°	328.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	328.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	523	
5°	507	47
15°	425	118
25°	283	124
35°	46	35
45°	4	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1268731

CATALOG NUMBER: P3AS02R509740DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	522.7
1°	521.9
2°	519.6
3°	516.2
4°	511.7
5°	506.9
6°	501.7
7°	496.1
8°	490.9
9°	484.9
10°	478.2
11°	470.4
12°	461.5
13°	450.4
14°	438.4
15°	424.6
16°	410.0
17°	395.9
18°	381.4
19°	368.7
20°	357.4
21°	346.5
22°	334.1
23°	319.9
24°	303.2
25°	282.7
26°	260.5
27°	235.7
28°	211.1
29°	184.5
30°	155.2
31°	127.8
32°	102.5
32.5°	91.5
33°	80.4
34°	61.7
35°	45.6
36°	33.4
37°	24.9
37.5°	21.5
38°	18.6
39°	14.5
40°	11.5
42.5°	6.5
45°	3.7



TEST NUMBER: P1268731

CATALOG NUMBER: P3AS02R509740DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	2.1
50°	0.8
52.5°	0.3
55°	0.2
57.5°	0.2
60°	0.1
62.5°	0.1
65°	0.1
67.5°	0.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)