

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268883

Luminaire Tested: P3AS05R109740DE010 E3DL1WMH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1268883  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R109740DE010 E3DL1WMH  
Description: 3in Adjustable LED luminaire with, R10 optic, 4000K CCT AND, 97CRI , E3DL1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 436.0 lumens  
Efficiency: N/A  
Efficacy: 55.2 lumens/watt  
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1268883

CATALOG NUMBER: P3AS05R109740DE010 E3DL1WMH

### Luminous Intensity Polar Plot

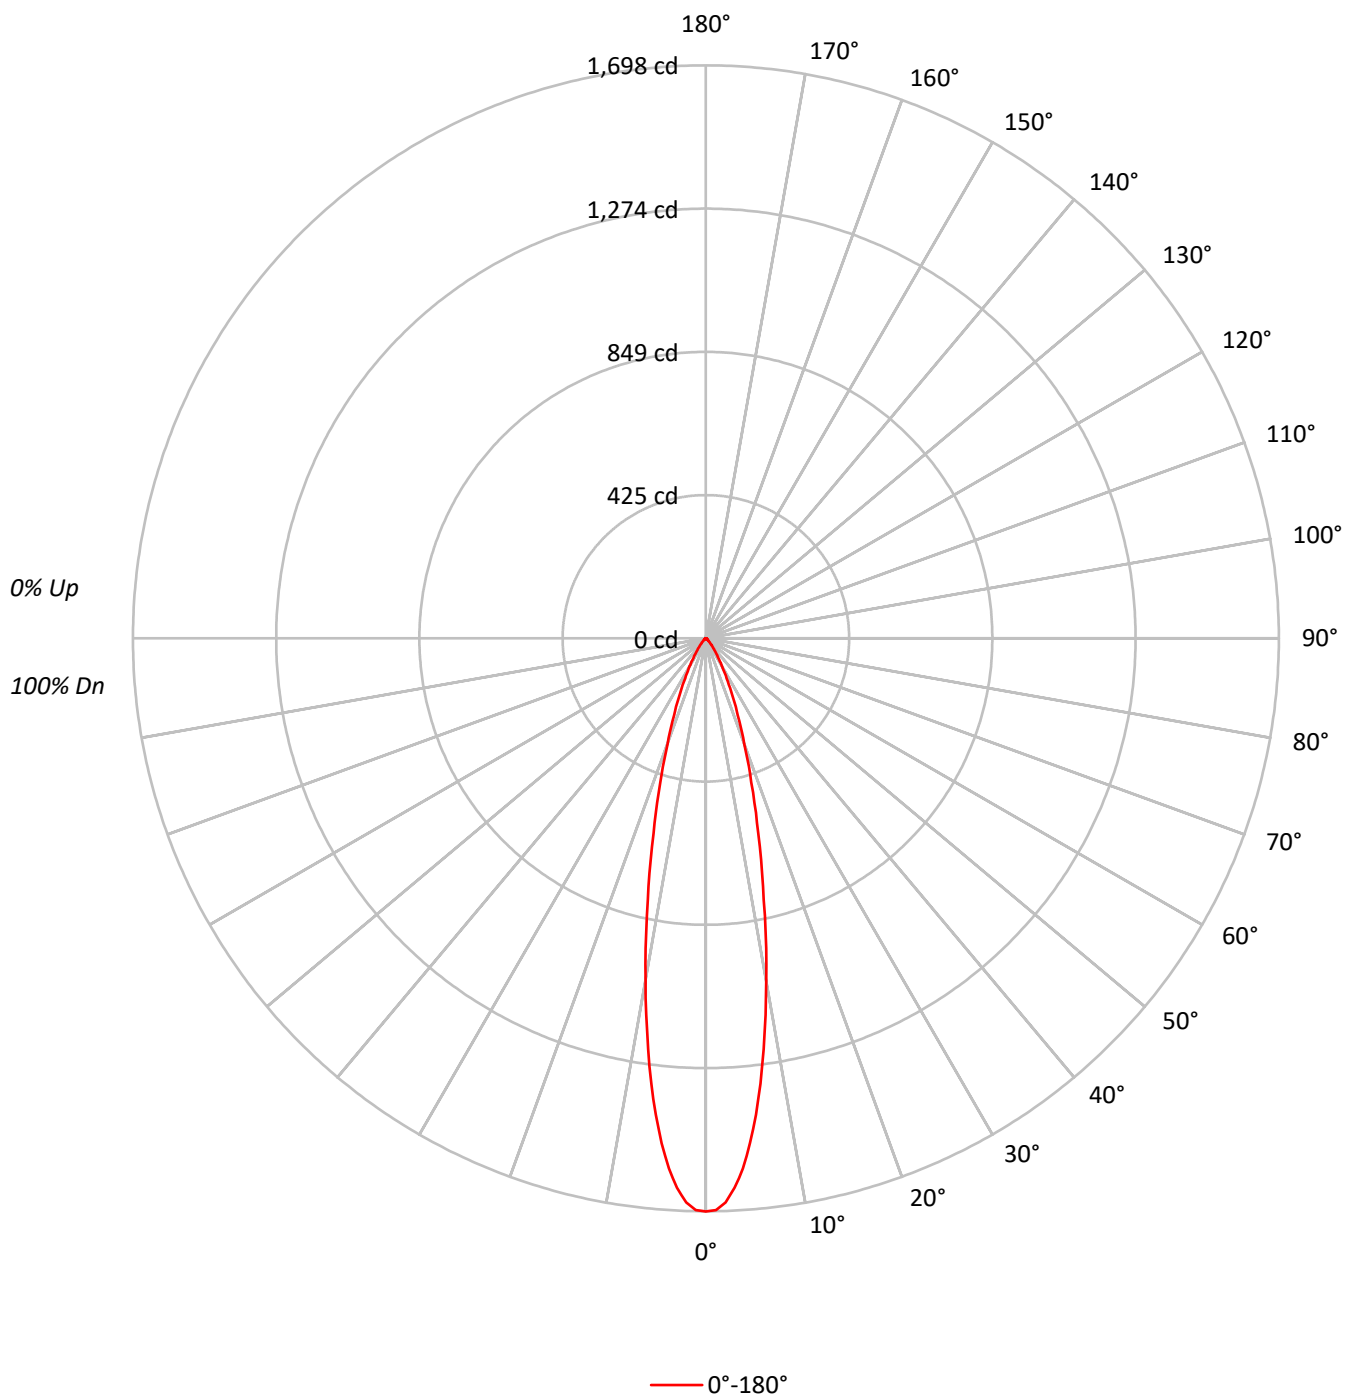

TEST NUMBER: P1268883

CATALOG NUMBER: P3AS05R109740DE010 E3DL1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 |  | 102 | 101 | 100 |  | 99  |
| 2   | 110 | 106 | 103 | 100 | 108 | 104 | 101 | 99  | 101 | 99  | 97  |  | 98  | 96  | 95  |  | 96  |
| 3   | 106 | 101 | 97  | 93  | 104 | 99  | 96  | 93  | 97  | 94  | 91  |  | 94  | 92  | 90  |  | 92  |
| 4   | 102 | 96  | 92  | 88  | 100 | 95  | 91  | 88  | 93  | 89  | 87  |  | 91  | 88  | 86  |  | 89  |
| 5   | 98  | 92  | 87  | 84  | 97  | 91  | 87  | 83  | 89  | 85  | 83  |  | 88  | 84  | 82  |  | 86  |
| 6   | 95  | 88  | 83  | 80  | 94  | 87  | 83  | 80  | 86  | 82  | 79  |  | 85  | 81  | 79  |  | 83  |
| 7   | 92  | 85  | 80  | 77  | 91  | 84  | 80  | 76  | 83  | 79  | 76  |  | 82  | 78  | 76  |  | 81  |
| 8   | 89  | 81  | 77  | 74  | 88  | 81  | 77  | 73  | 80  | 76  | 73  |  | 79  | 75  | 73  |  | 78  |
| 9   | 86  | 79  | 74  | 71  | 85  | 78  | 74  | 71  | 77  | 73  | 71  |  | 77  | 73  | 70  |  | 76  |
| 10  | 84  | 76  | 71  | 68  | 83  | 76  | 71  | 68  | 75  | 71  | 68  |  | 74  | 71  | 68  |  | 74  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 372448 |
| 5°  | 330618 |
| 10° | 229588 |
| 15° | 135778 |
| 20° | 77333  |
| 25° | 44204  |
| 30° | 24459  |
| 35° | 13037  |
| 40° | 7214   |
| 45° | 3907   |
| 50° | 2422   |
| 55° | 1912   |
| 60° | 1667   |
| 65° | 1505   |
| 70° | 1346   |
| 75° | 1440   |
| 80° | 1010   |
| 85° | 1006   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 3907 cd/sqm

TEST NUMBER: P1268883

CATALOG NUMBER: P3AS05R109740DE010 E3DL1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 127.7  | 29.3      |
| 10°-20°   | 168.6  | 38.7      |
| 20°-30°   | 86.8   | 19.9      |
| 30°-40°   | 32.6   | 7.5       |
| 40°-50°   | 10.7   | 2.4       |
| 50°-60°   | 4.6    | 1.1       |
| 60°-70°   | 2.9    | 0.7       |
| 70°-80°   | 1.7    | 0.4       |
| 80°-90°   | 0.4    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 383.1  | 87.9      |
| 0°-40°    | 415.7  | 95.3      |
| 0°-60°    | 430.9  | 98.8      |
| 0°-90°    | 436.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 436.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1698 |      |
| 5°  | 1502 | 128  |
| 15° | 598  | 169  |
| 25° | 183  | 87   |
| 35° | 49   | 33   |
| 45° | 13   | 11   |
| 55° | 5    | 5    |
| 65° | 3    | 3    |
| 75° | 2    | 2    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1268883

CATALOG NUMBER: P3AS05R109740DE010 E3DL1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1698.5 |
| 1°    | 1695.2 |
| 2°    | 1672.9 |
| 3°    | 1630.5 |
| 4°    | 1574.6 |
| 5°    | 1502.0 |
| 6°    | 1419.7 |
| 7°    | 1329.4 |
| 8°    | 1229.0 |
| 9°    | 1129.8 |
| 10°   | 1031.1 |
| 12.5° | 793.4  |
| 15°   | 598.1  |
| 17.5° | 447.7  |
| 20°   | 331.4  |
| 22.5° | 247.4  |
| 25°   | 182.7  |
| 27.5° | 133.1  |
| 30°   | 96.6   |
| 32.5° | 68.5   |
| 35°   | 48.7   |
| 37.5° | 34.9   |
| 40°   | 25.2   |
| 42.5° | 18.1   |
| 45°   | 12.6   |
| 47.5° | 9.2    |
| 50°   | 7.1    |
| 52.5° | 5.9    |
| 55°   | 5.0    |
| 57.5° | 4.2    |
| 60°   | 3.8    |
| 62.5° | 3.4    |
| 65°   | 2.9    |
| 67.5° | 2.5    |
| 70°   | 2.1    |
| 72.5° | 2.1    |
| 75°   | 1.7    |
| 77.5° | 1.3    |
| 80°   | 0.8    |
| 82.5° | 0.8    |
| 85°   | 0.4    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)