

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268935

Luminaire Tested: P3AS05R159740DE010 E3D1LI

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1268935  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R159740DE010 E3D1LI  
Description: 3in Adjustable LED luminaire with, R15 optic, 4000K CCT AND, 97CRI , E3D1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 627.0 lumens  
Efficiency: N/A  
Efficacy: 87.1 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1268935  
CATALOG NUMBER: P3AS05R159740DE010 E3D1LI

### Luminous Intensity Polar Plot

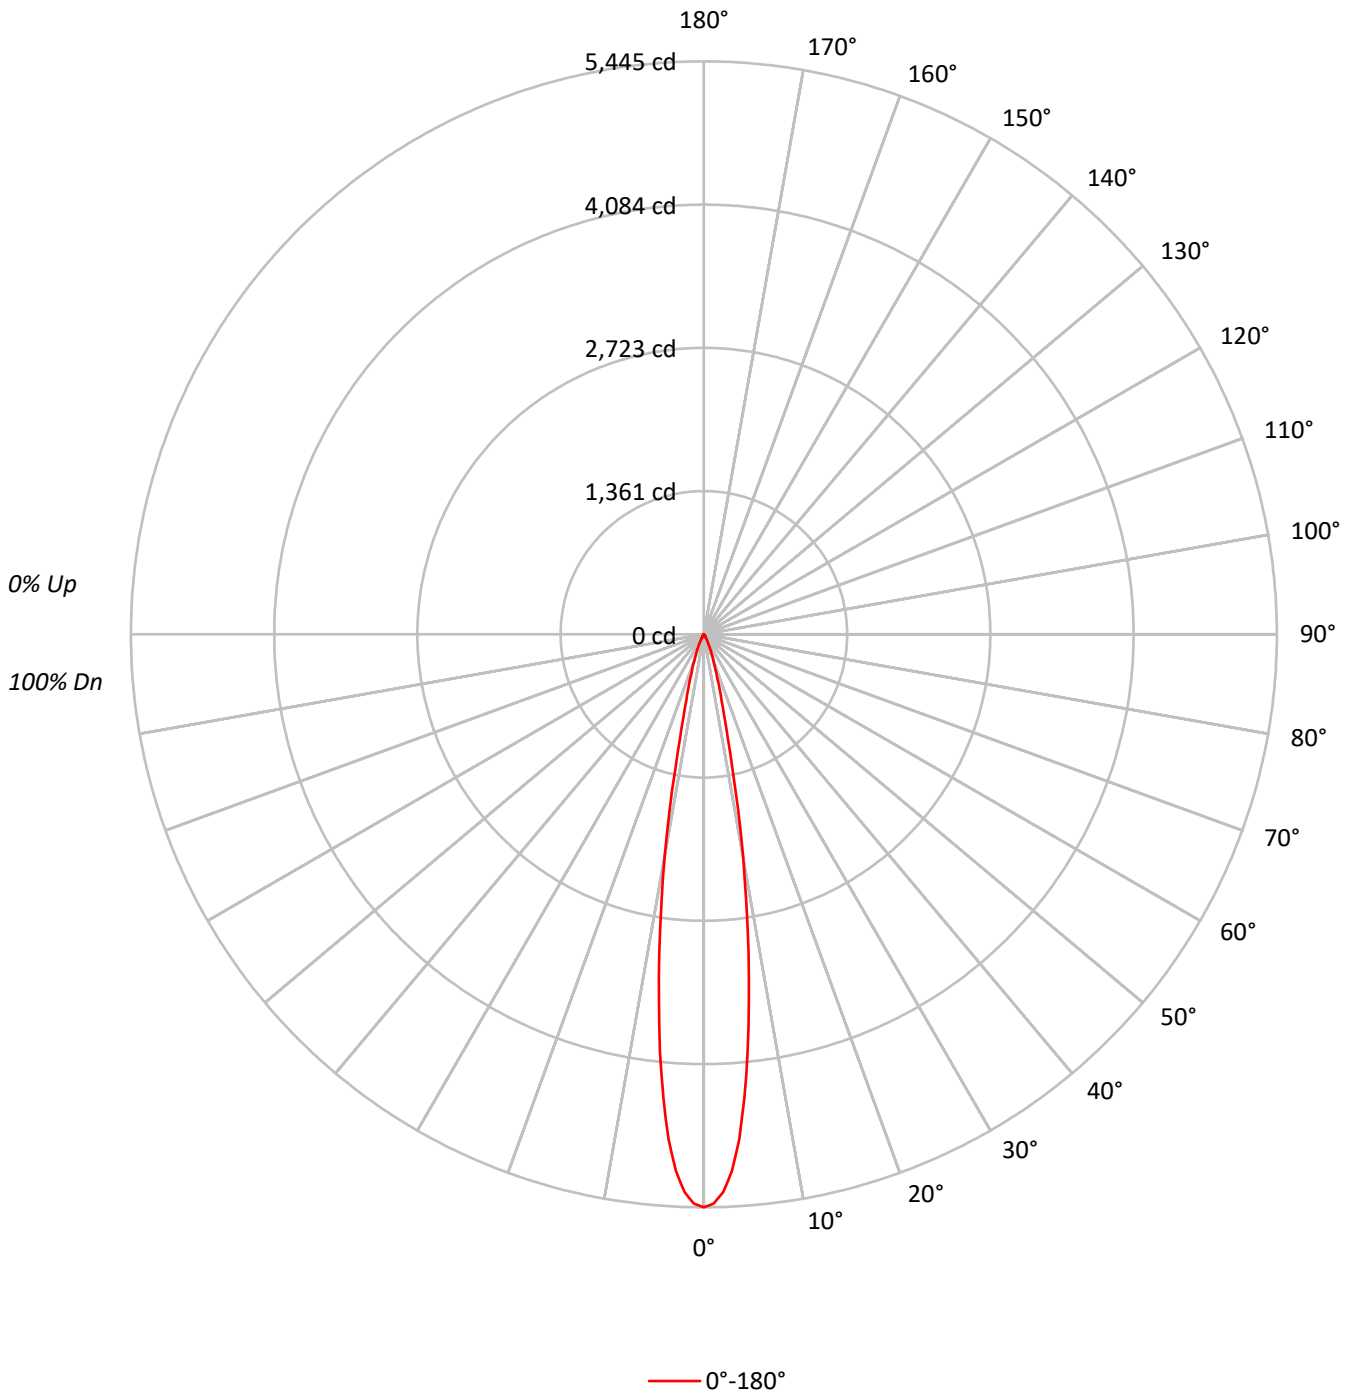



TEST NUMBER: P1268935

CATALOG NUMBER: P3AS05R159740DE010 E3D1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	105	104	103	102	101	100	99	98	98	98	98
2	112	109	107	105	110	108	105	103	105	103	101	102	100	99	99	98	97	96	96	96	96
3	110	106	102	100	108	104	102	99	102	100	98	100	98	96	98	96	95	94	94	94	94
4	107	102	99	96	106	101	98	96	99	97	95	98	96	94	96	94	93	92	92	92	92
5	105	100	96	94	103	99	96	93	97	94	92	96	93	92	94	93	91	90	90	90	90
6	102	97	94	91	101	96	93	91	95	92	90	94	92	90	93	91	89	88	88	88	88
7	100	95	91	89	99	94	91	89	93	90	88	92	90	88	91	89	88	87	87	87	87
8	98	93	89	87	97	92	89	87	91	89	87	91	88	86	90	88	86	85	85	85	85
9	96	91	88	85	96	91	87	85	90	87	85	89	87	85	89	86	85	84	84	84	84
10	95	89	86	84	94	89	86	84	88	85	83	88	85	83	87	85	83	82	82	82	82

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1193961
5°	973605
10°	476811
15°	145949
20°	61815
25°	27945
30°	10888
35°	5033
40°	1574
45°	589
50°	239
55°	76
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 589 cd/sqm



TEST NUMBER: P1268935

CATALOG NUMBER: P3AS05R159740DE010 E3D1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	344.3	54.9
10°-20°	211.3	33.7
20°-30°	56.7	9.1
30°-40°	12.5	2.0
40°-50°	1.8	0.3
50°-60°	0.3	0.0
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	612.3	97.7
0°-40°	624.8	99.7
0°-60°	626.9	100.0
0°-90°	627.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	627.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5445	
5°	4423	344
15°	643	211
25°	116	57
35°	19	13
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1268935  
CATALOG NUMBER: P3AS05R159740DE010 E3D1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5444.9
1°	5410.9
2°	5301.8
3°	5105.2
4°	4809.2
5°	4423.1
6°	3986.3
7°	3499.9
8°	3052.9
9°	2579.1
10°	2141.4
11°	1708.2
12°	1314.3
13°	1010.9
14°	800.3
15°	642.9
17.5°	398.5
20°	264.9
22.5°	178.3
25°	115.5
27.5°	68.5
30°	43.0
32.5°	29.0
35°	18.8
37.5°	10.5
40°	5.5
42.5°	3.1
45°	1.9
47.5°	1.2
50°	0.7
52.5°	0.5
55°	0.2
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1268935  
CATALOG NUMBER: P3AS05R159740DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)