

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1268961

Luminaire Tested: P3AS05R209740DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1268961
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209740DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R20 optic, 4000K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 612.1 lumens
Efficiency: N/A
Efficacy: 85.0 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1268961

CATALOG NUMBER: P3AS05R209740DE010 E3CB1MMS

Luminous Intensity Polar Plot

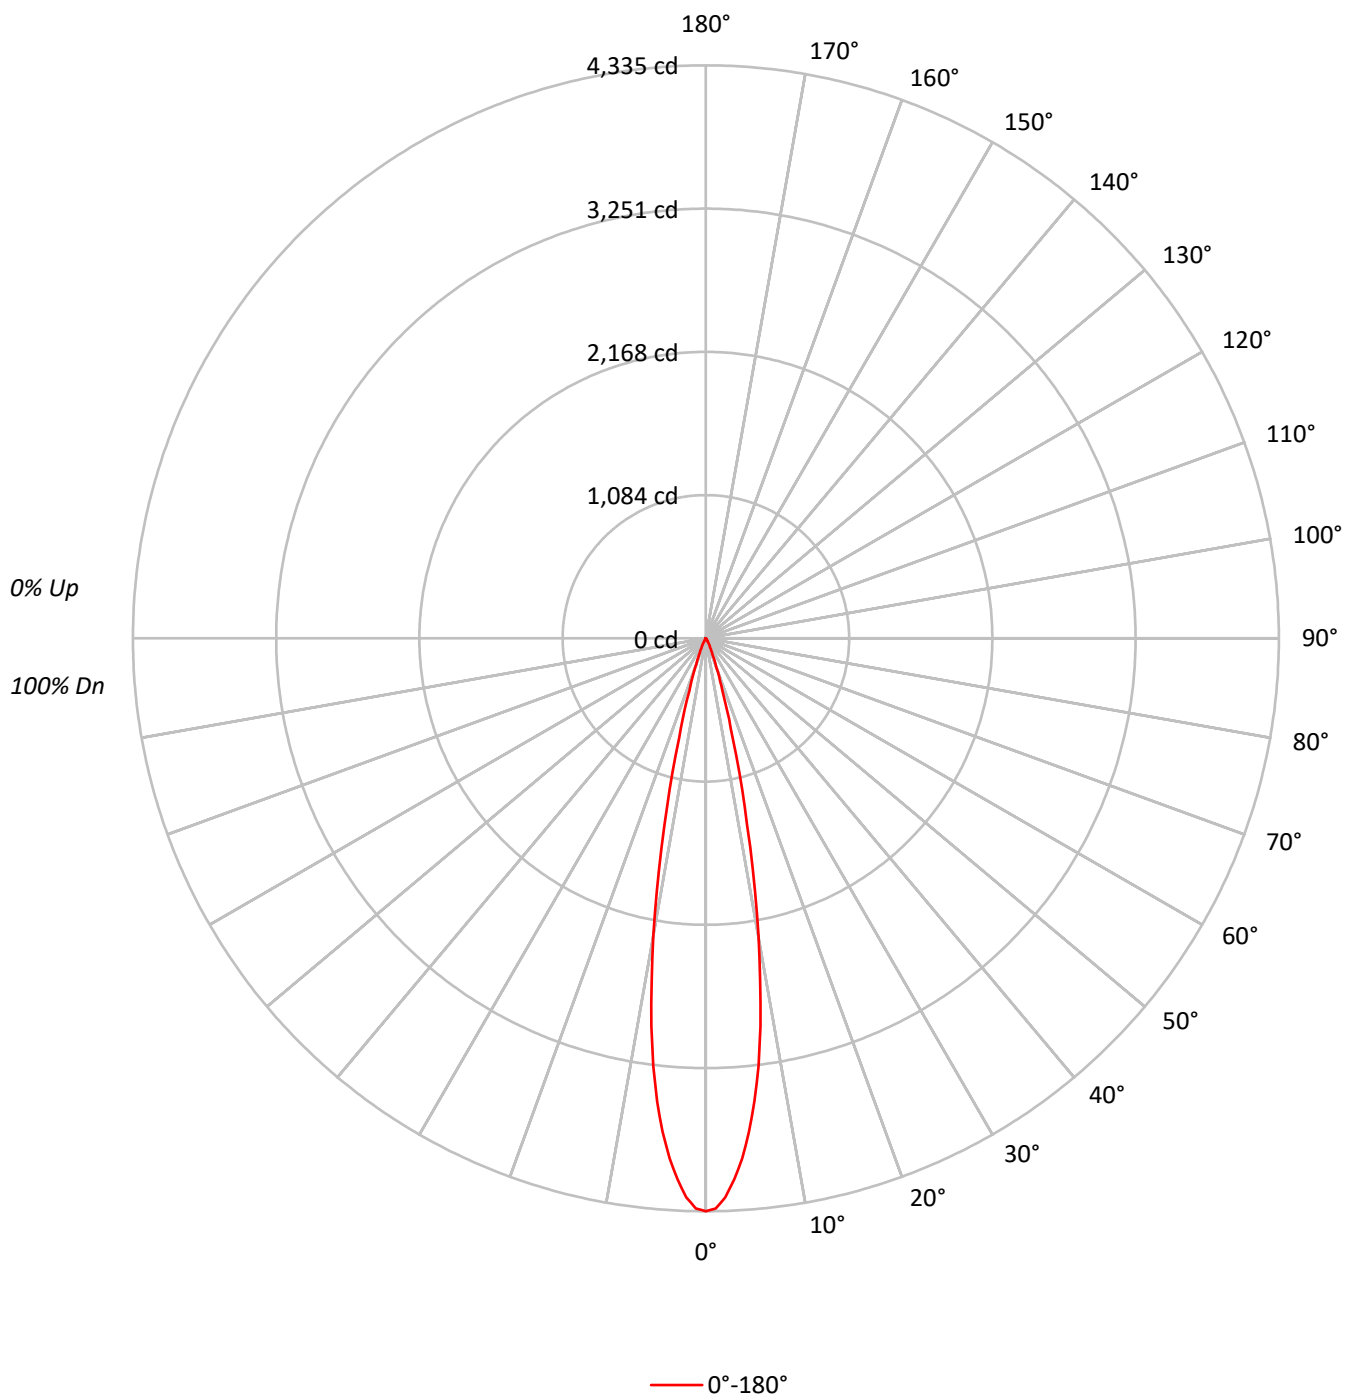

TEST NUMBER: P1268961

CATALOG NUMBER: P3AS05R209740DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98		
2	112	109	106	104	110	108	105	103	104	103	101	102	100	99	99	98	97	95		
3	109	105	102	100	108	104	101	99	102	99	97	99	98	96	97	96	95	93		
4	107	102	99	96	105	101	98	96	99	97	94	97	95	93	96	94	92	91		
5	104	99	96	93	103	98	95	93	97	94	92	95	93	91	94	92	91	90		
6	102	97	93	91	101	96	93	90	95	92	90	94	91	89	93	90	89	88		
7	100	94	91	88	99	94	91	88	93	90	88	92	89	87	91	89	87	86		
8	98	92	89	86	97	92	89	86	91	88	86	90	88	86	89	87	85	85		
9	96	90	87	85	95	90	87	85	89	86	84	89	86	84	88	86	84	83		
10	94	89	85	83	93	88	85	83	88	85	83	87	84	83	86	84	82	82		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	950516
5°	825003
10°	509766
15°	177050
20°	54371
25°	19211
30°	7115
35°	2864
40°	1517
45°	589
50°	341
55°	382
60°	439
65°	259
70°	321
75°	424
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 589 cd/sqm

TEST NUMBER: P1268961

CATALOG NUMBER: P3AS05R209740DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	311.1	50.8
10°-20°	246.8	40.3
20°-30°	42.7	7.0
30°-40°	7.8	1.3
40°-50°	1.8	0.3
50°-60°	0.9	0.1
60°-70°	0.6	0.1
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	600.6	98.1
0°-40°	608.4	99.4
0°-60°	611.0	99.8
0°-90°	612.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	612.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4335	
5°	3748	311
15°	780	247
25°	79	43
35°	11	8
45°	2	2
55°	1	1
65°	0	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1268961

CATALOG NUMBER: P3AS05R209740DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	4334.7
1°	4313.8
2°	4231.5
3°	4099.2
4°	3944.2
5°	3748.0
6°	3523.2
7°	3261.6
8°	2963.7
9°	2629.0
10°	2289.4
12.5°	1444.1
15°	779.9
17.5°	416.6
20°	233.0
22.5°	133.2
25°	79.4
27.5°	48.4
30°	28.1
32.5°	16.5
35°	10.7
37.5°	7.3
40°	5.3
42.5°	3.4
45°	1.9
47.5°	1.0
50°	1.0
52.5°	1.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)