

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269019

Luminaire Tested: P3AS05R309740DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269019
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R309740DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 617.1 lumens
Efficiency: N/A
Efficacy: 85.7 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269019

CATALOG NUMBER: P3AS05R309740DE010 E3CB1MMS

Luminous Intensity Polar Plot

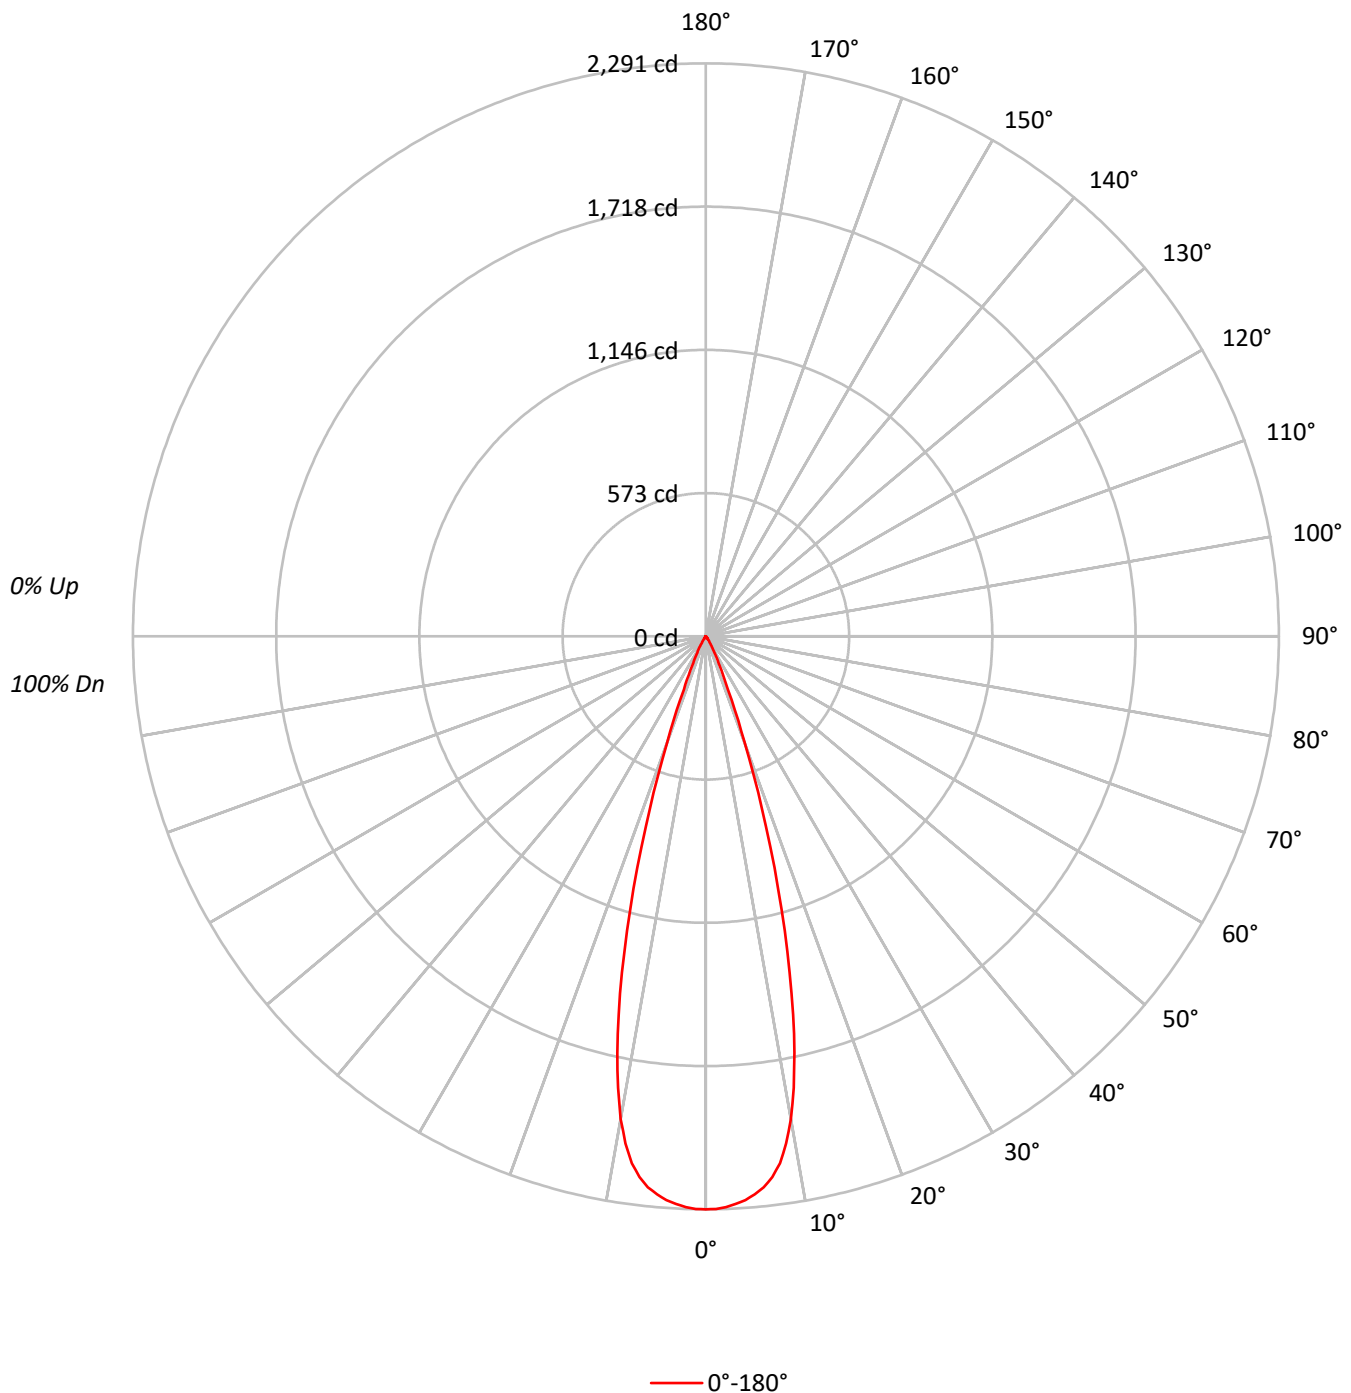

TEST NUMBER: P1269019

CATALOG NUMBER: P3AS05R309740DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		98
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		95
4	105	100	96	93	103	98	95	92	97	94	91		95	92	90		93
5	102	96	92	89	100	95	91	89	94	90	88		92	89	87		91
6	99	93	89	86	98	92	88	86	91	88	85		90	87	85		89
7	96	90	86	83	95	89	86	83	88	85	82		87	84	82		86
8	94	87	83	81	93	87	83	80	86	83	80		85	82	80		84
9	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82
10	89	83	79	76	88	82	78	76	82	78	76		81	78	76		80

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	502438
5°	492955
10°	436376
15°	276483
20°	104939
25°	31066
30°	12280
35°	3774
40°	1660
45°	589
50°	512
55°	382
60°	439
65°	519
70°	321
75°	424
80°	631
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 631 cd/sqm

TEST NUMBER: P1269019

CATALOG NUMBER: P3AS05R309740DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.9	33.4
10°-20°	320.8	52.0
20°-30°	74.5	12.1
30°-40°	11.6	1.9
40°-50°	2.0	0.3
50°-60°	1.0	0.2
60°-70°	0.8	0.1
70°-80°	0.5	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	601.2	97.4
0°-40°	612.8	99.3
0°-60°	615.7	99.8
0°-90°	617.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	617.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2291	
5°	2240	206
15°	1218	321
25°	128	74
35°	14	12
45°	2	2
55°	1	1
65°	1	1
75°	0	1
85°	0	0
90°	0	

TEST NUMBER: P1269019

CATALOG NUMBER: P3AS05R309740DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2291.3
1°	2289.9
2°	2283.6
3°	2272.9
4°	2259.4
5°	2239.5
6°	2214.8
7°	2177.9
8°	2127.5
9°	2053.4
10°	1959.8
11°	1839.2
12°	1703.0
13°	1551.8
14°	1385.6
15°	1217.9
17.5°	796.7
20°	449.7
22.5°	229.7
25°	128.4
27.5°	79.0
30°	48.5
32.5°	26.2
35°	14.1
37.5°	9.2
40°	5.8
42.5°	3.4
45°	1.9
47.5°	1.5
50°	1.5
52.5°	1.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1269019

CATALOG NUMBER: P3AS05R309740DE010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)