

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269073

Luminaire Tested: P3AS05R359740DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269073
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359740DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 97CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 510.0 lumens
Efficiency: N/A
Efficacy: 70.8 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269073

CATALOG NUMBER: P3AS05R359740DE010 E3DLP1WH

Luminous Intensity Polar Plot

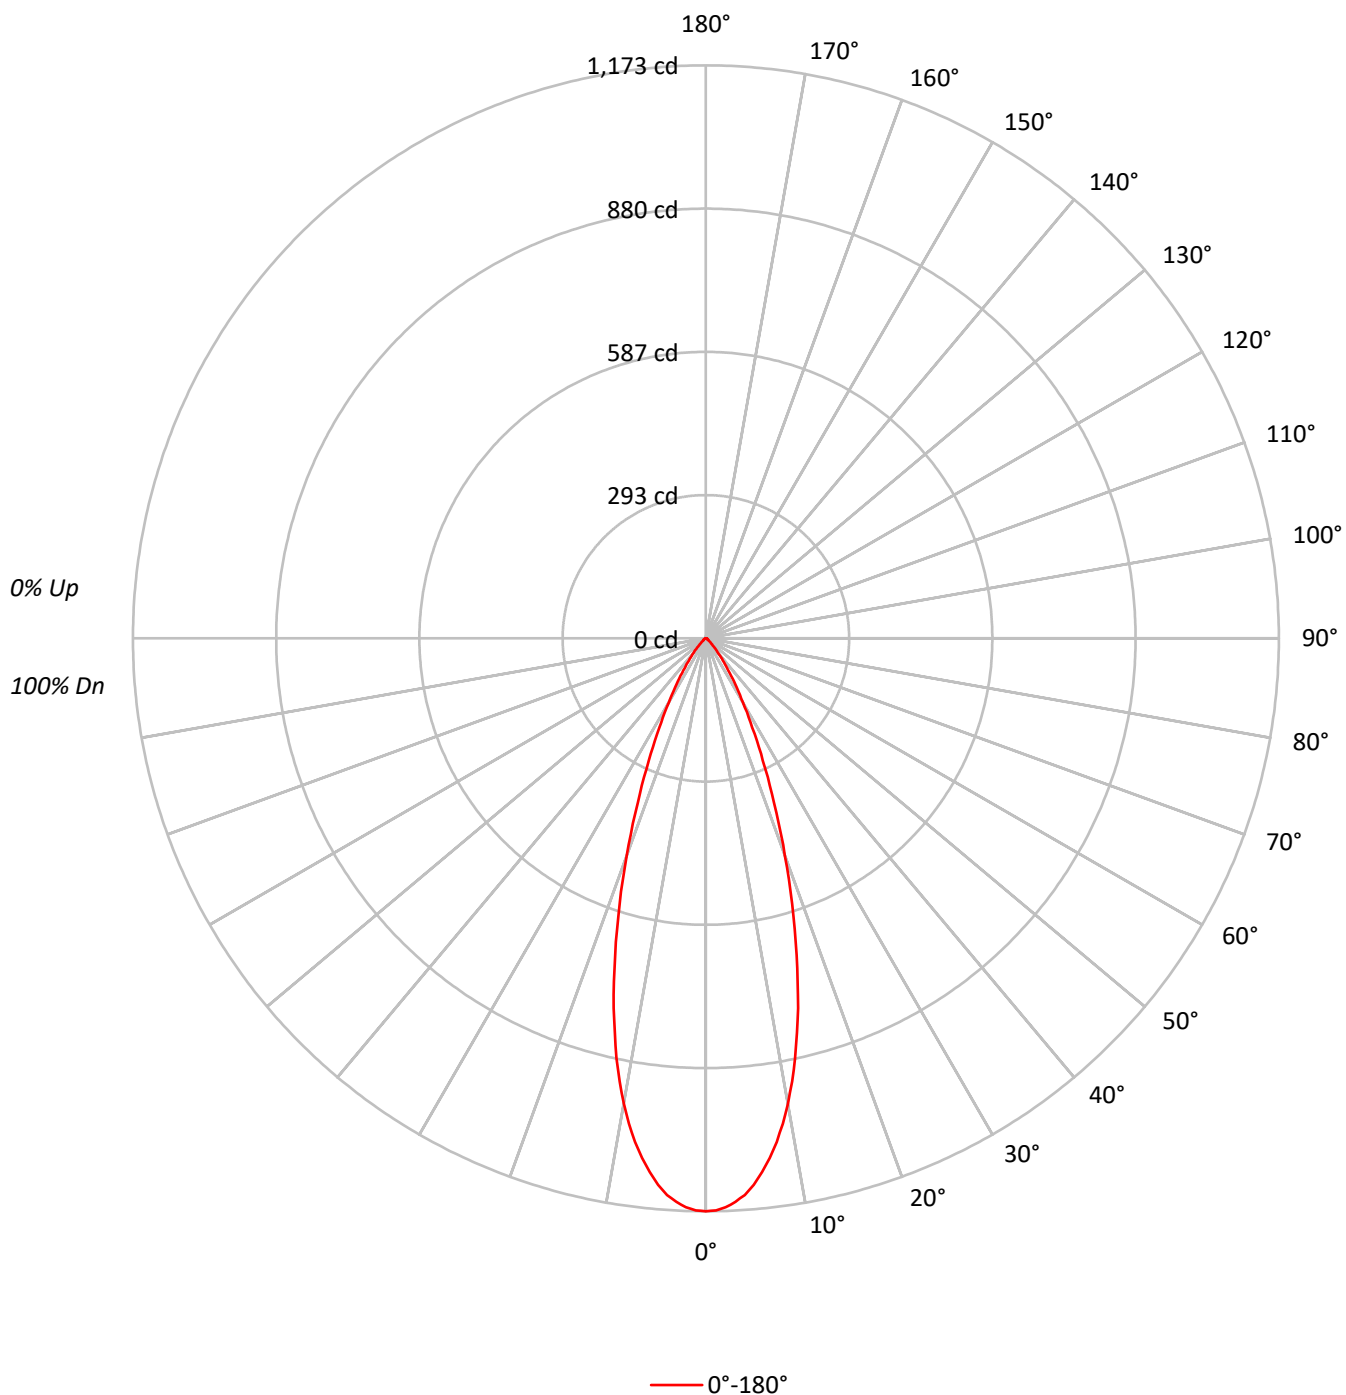

TEST NUMBER: P1269073

CATALOG NUMBER: P3AS05R359740DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	85	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	69	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	66	81	74	69	65	73	68	65		72	68	65		71
10	79	71	66	63	78	71	66	63	70	66	63		69	65	62		69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	257216
5°	247215
10°	215382
15°	164973
20°	110376
25°	66778
30°	38335
35°	21415
40°	11393
45°	5861
50°	2797
55°	2217
60°	2149
65°	1764
70°	1859
75°	1610
80°	1894
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5861 cd/sqm

TEST NUMBER: P1269073

CATALOG NUMBER: P3AS05R359740DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.2	20.0
10°-20°	198.0	38.8
20°-30°	129.6	25.4
30°-40°	52.6	10.3
40°-50°	15.8	3.1
50°-60°	5.3	1.0
60°-70°	3.6	0.7
70°-80°	2.1	0.4
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	429.8	84.3
0°-40°	482.4	94.6
0°-60°	503.6	98.7
0°-90°	510.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	510.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1173	
5°	1123	102
15°	727	198
25°	276	130
35°	80	53
45°	19	16
55°	6	5
65°	3	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1269073

CATALOG NUMBER: P3AS05R359740DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1173.0
1°	1171.1
2°	1165.7
3°	1155.1
4°	1142.5
5°	1123.1
6°	1098.8
7°	1071.6
8°	1041.1
9°	1006.1
10°	967.3
11°	924.2
12°	879.0
13°	828.6
14°	780.6
15°	726.7
17.5°	596.2
20°	473.0
22.5°	363.8
25°	276.0
27.5°	205.7
30°	151.4
32.5°	111.1
35°	80.0
37.5°	56.8
40°	39.8
42.5°	27.7
45°	18.9
47.5°	12.6
50°	8.2
52.5°	6.3
55°	5.8
57.5°	5.3
60°	4.9
62.5°	4.4
65°	3.4
67.5°	2.9
70°	2.9
72.5°	2.4
75°	1.9
77.5°	1.5
80°	1.5
82.5°	1.0
85°	0.5
87.5°	0.5



TEST NUMBER: P1269073

CATALOG NUMBER: P3AS05R359740DE010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)