

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269075

Luminaire Tested: P3AS05R359740DE010 E3PH1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269075
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359740DE010 E3PH1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 97CRI , E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 563.0 lumens
Efficiency: N/A
Efficacy: 78.2 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269075

CATALOG NUMBER: P3AS05R359740DE010 E3PH1MW

Luminous Intensity Polar Plot

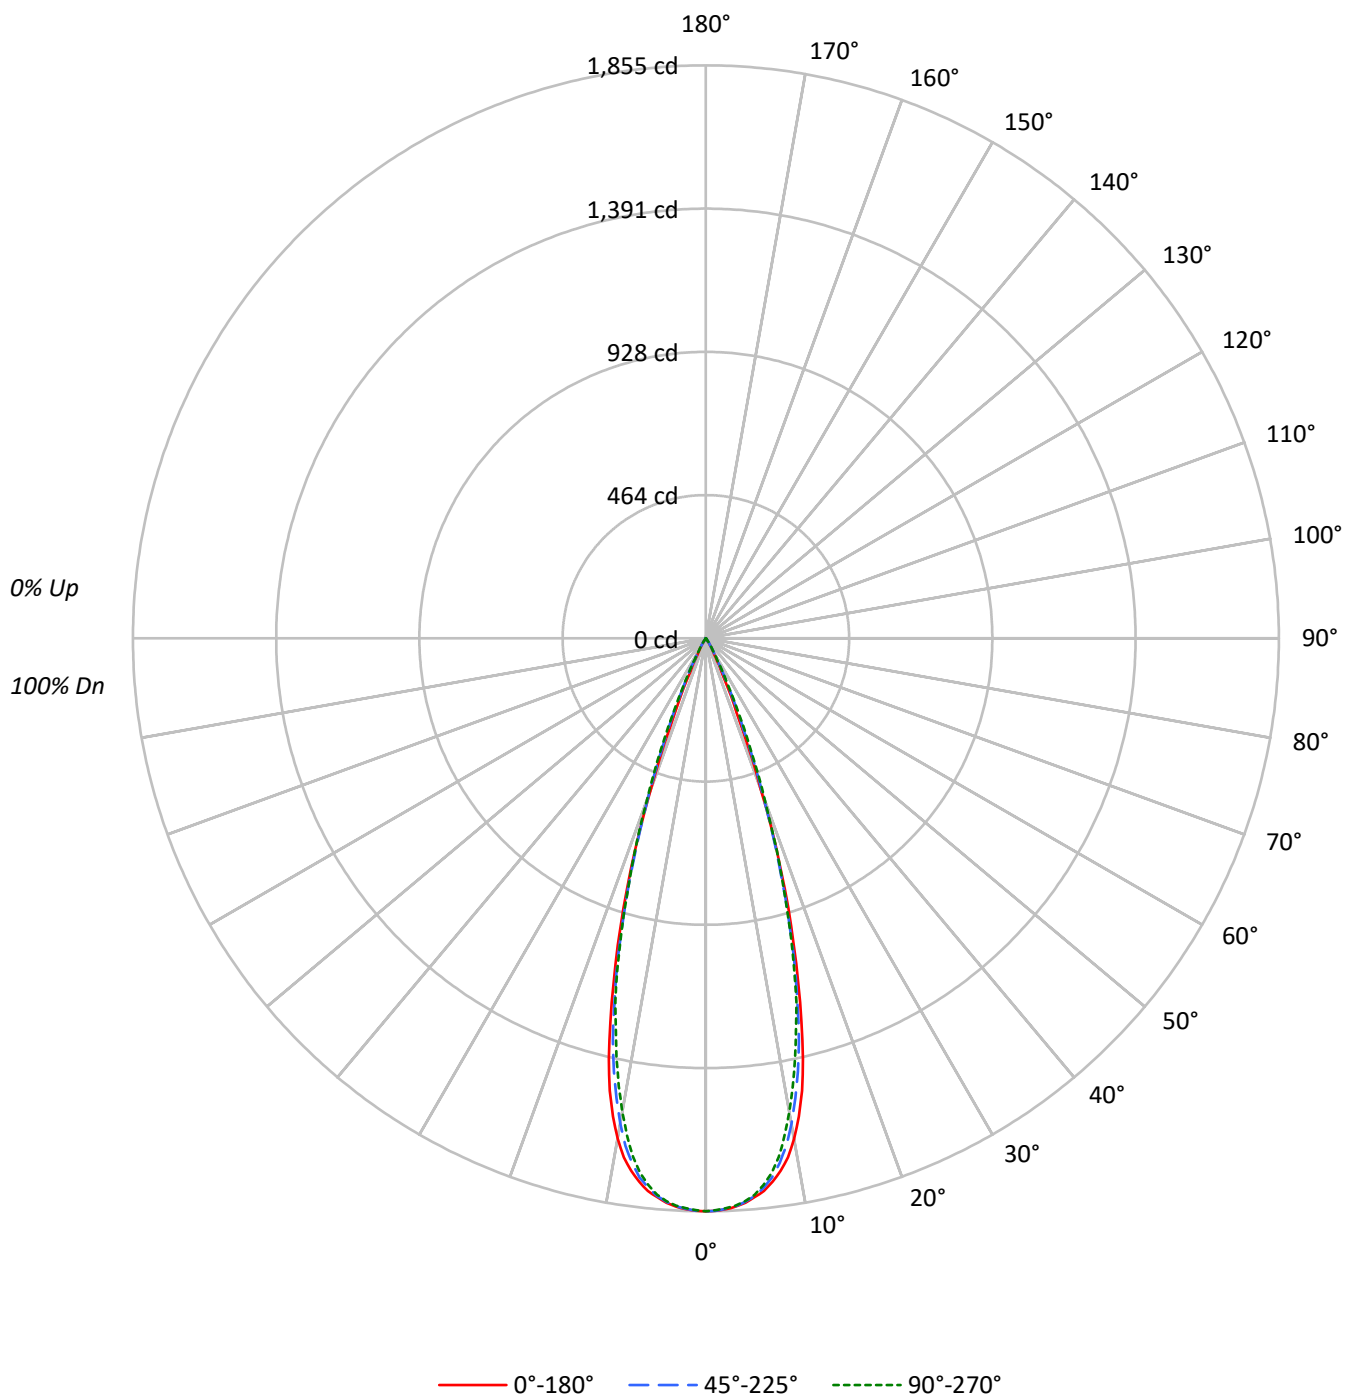

TEST NUMBER: P1269075

CATALOG NUMBER: P3AS05R359740DE010 E3PH1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93	92	91
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	90	89	87
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	87	86	85
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85	84	82
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82	81	80
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	79	78	77
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	76	75	74
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	74	73	72
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	73	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	406744	406744	406744
5°	399757	398898	398040
10°	366370	355349	346709
15°	262340	253986	250898
20°	121647	125848	130258
25°	28865	41059	42825
30°	8482	9698	10938
35°	1954	3105	2864
40°	429	830	544
45°	155	155	155
50°	171	0	171
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 180 cd/sqm

TEST NUMBER: P1269075

CATALOG NUMBER: P3AS05R359740DE010 E3PH1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.5	29.6
10°-20°	297.7	52.9
20°-30°	89.6	15.9
30°-40°	8.6	1.5
40°-50°	0.6	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	553.8	98.4
0°-40°	562.4	99.9
0°-60°	563.0	100.0
0°-90°	563.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	563.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1855	1855	1855	1855	1855	
5°	1816	1816	1812	1810	1808	168
15°	1156	1147	1119	1114	1105	305
25°	119	131	170	177	177	77
35°	7	10	12	13	11	7
45°	0	0	0	0	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1269075

CATALOG NUMBER: P3AS05R359740DE010 E3PH1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1854.9	1854.9	1854.9	1854.9	1854.9
1°	1853.9	1853.9	1853.0	1853.0	1851.0
2°	1849.6	1850.0	1848.1	1847.6	1846.2
3°	1842.8	1841.3	1841.3	1840.3	1839.4
4°	1832.1	1829.2	1828.2	1828.7	1826.8
5°	1816.1	1815.6	1812.2	1809.8	1808.3
6°	1798.6	1795.2	1788.0	1781.7	1780.2
7°	1772.5	1765.2	1758.9	1745.8	1743.8
8°	1740.4	1728.8	1715.2	1696.8	1695.8
9°	1701.2	1682.3	1663.3	1638.6	1629.9
10°	1645.4	1627.9	1595.9	1574.1	1557.1
11°	1576.1	1554.2	1516.9	1490.7	1476.6
12°	1497.5	1477.1	1433.5	1409.7	1389.8
13°	1396.6	1379.7	1338.9	1312.7	1297.2
14°	1279.8	1267.1	1228.3	1216.7	1211.4
15°	1155.6	1146.9	1118.8	1113.9	1105.2
17.5°	850.6	836.0	820.0	822.9	825.9
20°	521.3	541.7	539.3	549.9	558.2
22.5°	259.9	286.1	316.7	335.1	344.3
25°	119.3	131.4	169.7	177.0	177.0
27.5°	60.1	63.0	80.0	81.5	85.3
30°	33.5	35.9	38.3	42.7	43.2
32.5°	17.0	19.9	20.9	23.3	22.3
35°	7.3	9.7	11.6	12.6	10.7
37.5°	3.4	4.4	6.3	5.8	4.4
40°	1.5	1.9	2.9	2.4	1.9
42.5°	1.0	1.0	1.5	1.0	1.0
45°	0.5	0.5	0.5	0.5	0.5
47.5°	0.5	0.5	0.0	0.5	0.5
50°	0.5	0.0	0.0	0.0	0.5
52.5°	0.5	0.0	0.0	0.0	0.5
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1269075

CATALOG NUMBER: P3AS05R359740DE010 E3PH1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)