

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269076

Luminaire Tested: P3AS05R359740DE010 E3PHLD1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1269076  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R359740DE010 E3PHLD1MW  
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 97CRI , E3PHLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 376.0 lumens  
Efficiency: N/A  
Efficacy: 52.2 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1269076  
CATALOG NUMBER: P3AS05R359740DE010 E3PHLD1MW

### Luminous Intensity Polar Plot

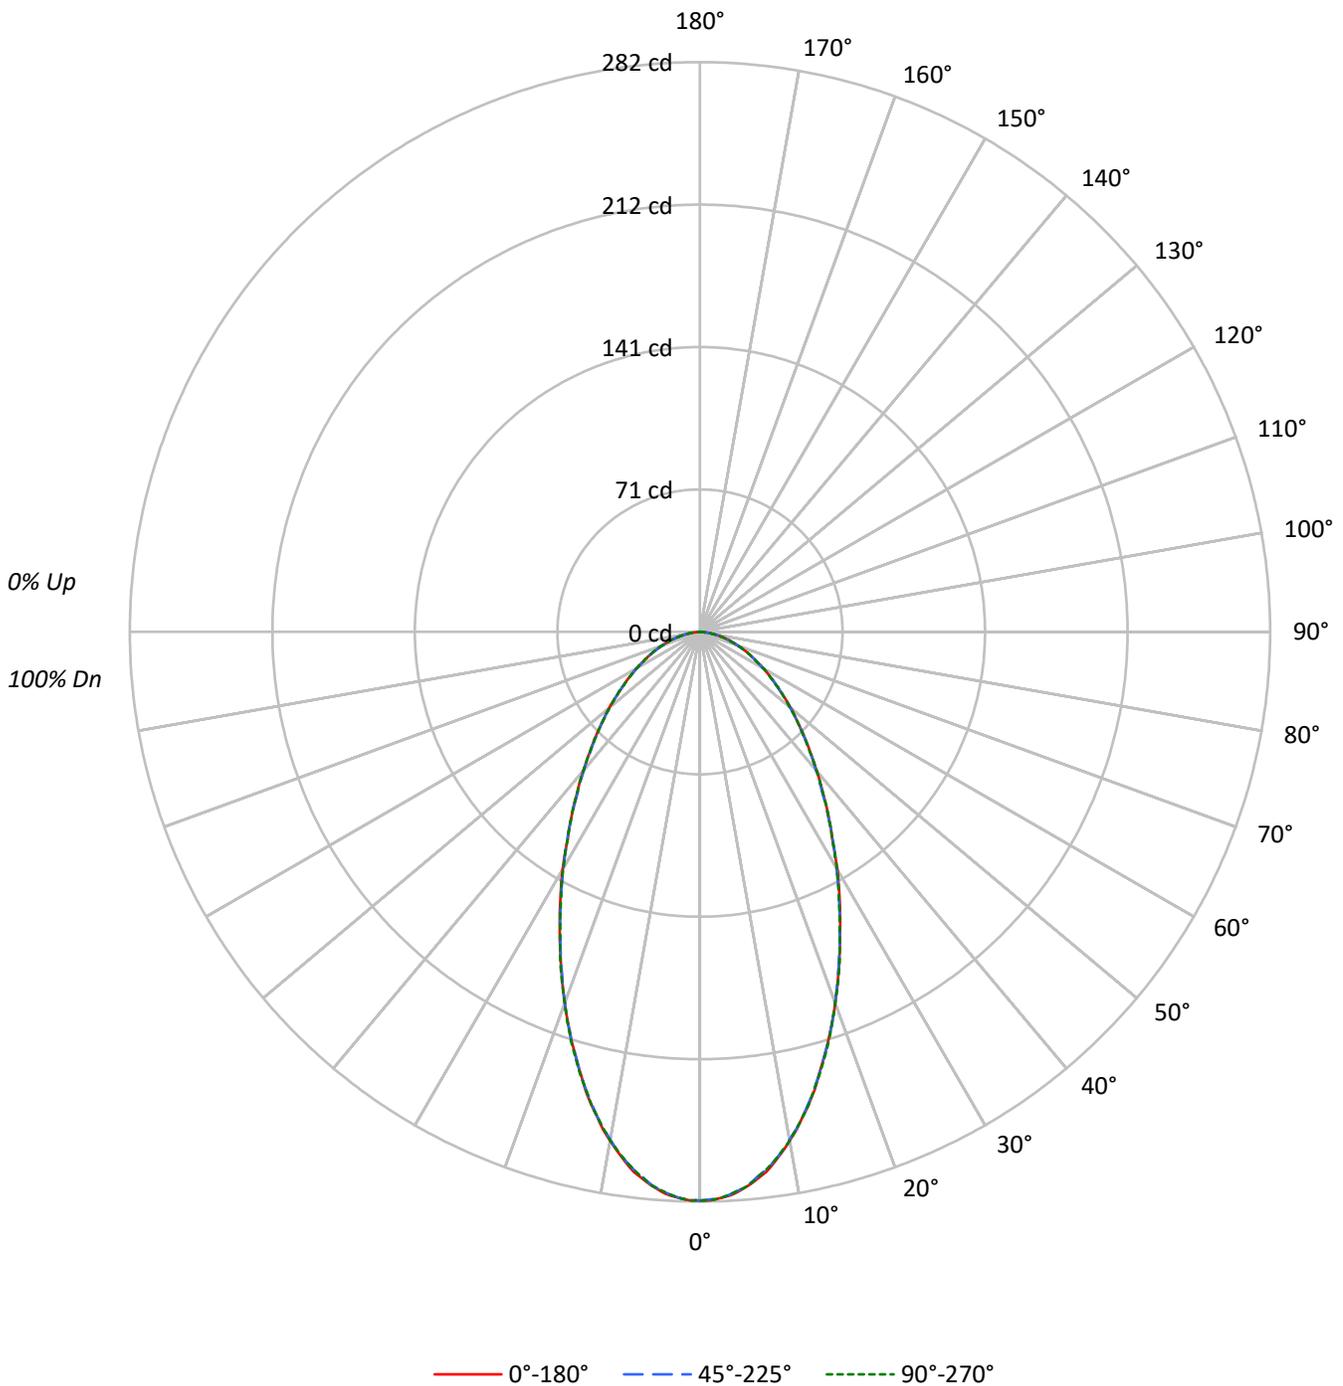



TEST NUMBER: P1269076  
 CATALOG NUMBER: P3AS05R359740DE010 E3PHLD1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	111	107	103	100	108	105	101	99	100	98	95	97	95	93	93	91	90	88	88	88
2	103	96	90	85	100	94	89	84	90	86	82	87	84	81	84	81	79	77	77	77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68	68	68
4	88	78	71	65	86	77	70	64	75	68	64	72	67	63	70	66	62	60	60	60
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54	54	54
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51	49	49	49
7	72	60	53	47	71	60	52	47	58	52	47	57	51	46	55	50	46	44	44	44
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	41	41	41
9	64	52	45	40	63	51	44	40	50	44	39	49	44	39	48	43	39	38	38	38
10	60	49	42	37	59	48	41	37	47	41	37	46	41	36	45	40	36	35	35	35

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	61728	61728	61728
5°	60555	60466	60555
10°	56935	56824	56935
15°	51555	51555	51669
20°	45644	45644	45644
25°	39680	39559	39559
30°	34410	34157	34284
35°	29607	29500	29607
40°	25705	25562	25705
45°	22576	22421	22421
50°	20025	19854	19854
55°	17624	17624	17624
60°	15964	15744	15964
65°	14372	14372	14372
70°	12759	12759	12759
75°	11522	11099	11522
80°	9850	9850	9850
85°	6038	6038	6038

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22576 cd/sqm



TEST NUMBER: P1269076

CATALOG NUMBER: P3AS05R359740DE010 E3PHLD1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.6	6.8
10°-20°	63.4	16.8
20°-30°	75.3	20.0
30°-40°	69.2	18.4
40°-50°	56.2	14.9
50°-60°	41.6	11.1
60°-70°	27.5	7.3
70°-80°	14.2	3.8
80°-90°	3.2	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	164.2	43.7
0°-40°	233.4	62.1
0°-60°	331.1	88.1
0°-90°	376.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	376.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	282	282	282	282	282	
5°	275	275	275	275	275	26
15°	227	227	227	227	228	63
25°	164	164	164	164	164	75
35°	111	110	110	111	111	69
45°	73	72	72	72	72	56
55°	46	46	46	46	46	42
65°	28	28	28	28	28	27
75°	14	14	13	14	14	14
85°	2	2	2	2	2	3
90°	0	0	0	0	0	



TEST NUMBER: P1269076

CATALOG NUMBER: P3AS05R359740DE010 E3PHLD1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	281.5	281.5	281.5	281.5	281.5
1°	281.5	281.0	281.0	281.0	281.5
2°	280.5	280.5	280.5	280.5	280.5
3°	279.5	279.0	279.0	279.0	279.0
4°	277.6	277.1	277.1	277.1	277.1
5°	275.1	274.7	274.7	274.7	275.1
6°	272.2	271.7	271.3	271.3	271.7
7°	269.3	268.3	268.3	268.3	268.3
8°	265.0	264.5	264.5	264.5	264.5
9°	260.6	259.6	260.1	260.1	260.1
10°	255.7	255.2	255.2	255.2	255.7
11°	250.9	250.4	250.4	249.9	250.4
12°	245.1	245.1	245.1	245.1	245.1
13°	239.7	239.2	239.2	239.2	239.7
14°	233.9	233.4	233.4	233.4	233.4
15°	227.1	227.1	227.1	227.1	227.6
17.5°	211.6	211.1	211.6	211.6	212.1
20°	195.6	195.1	195.6	195.6	195.6
22.5°	179.5	179.5	179.1	179.5	180.0
25°	164.0	163.5	163.5	164.0	163.5
27.5°	149.5	149.0	149.0	149.0	149.0
30°	135.9	134.9	134.9	135.4	135.4
32.5°	121.8	121.8	122.3	121.8	121.8
35°	110.6	110.2	110.2	110.6	110.6
37.5°	99.5	99.0	99.0	99.5	99.5
40°	89.8	89.8	89.3	89.8	89.8
42.5°	80.6	80.6	80.6	80.6	80.6
45°	72.8	72.3	72.3	72.3	72.3
47.5°	65.0	65.0	65.0	64.5	65.0
50°	58.7	58.2	58.2	58.2	58.2
52.5°	51.9	51.9	51.9	51.9	51.9
55°	46.1	46.1	46.1	46.1	46.1
57.5°	41.2	40.8	40.8	40.8	40.8
60°	36.4	36.4	35.9	36.4	36.4
62.5°	31.5	31.5	31.5	31.5	31.5
65°	27.7	27.7	27.7	27.7	27.7
67.5°	23.8	23.8	23.8	23.8	23.8
70°	19.9	19.9	19.9	19.9	19.9
72.5°	17.0	16.5	16.5	16.5	16.5
75°	13.6	13.6	13.1	13.6	13.6
77.5°	10.2	10.2	10.2	10.2	10.2
80°	7.8	7.8	7.8	7.3	7.8
82.5°	4.9	4.9	4.9	4.9	4.9
85°	2.4	2.4	2.4	2.4	2.4
87.5°	0.5	0.5	0.5	1.0	1.0



TEST NUMBER: P1269076  
CATALOG NUMBER: P3AS05R359740DE010 E3PHLD1MW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)