

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269131

Luminaire Tested: P3AS05R459740DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269131
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R459740DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 4000K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 350.0 lumens
Efficiency: N/A
Efficacy: 48.6 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269131

CATALOG NUMBER: P3AS05R459740DE010 E3DLP1WMH

Luminous Intensity Polar Plot

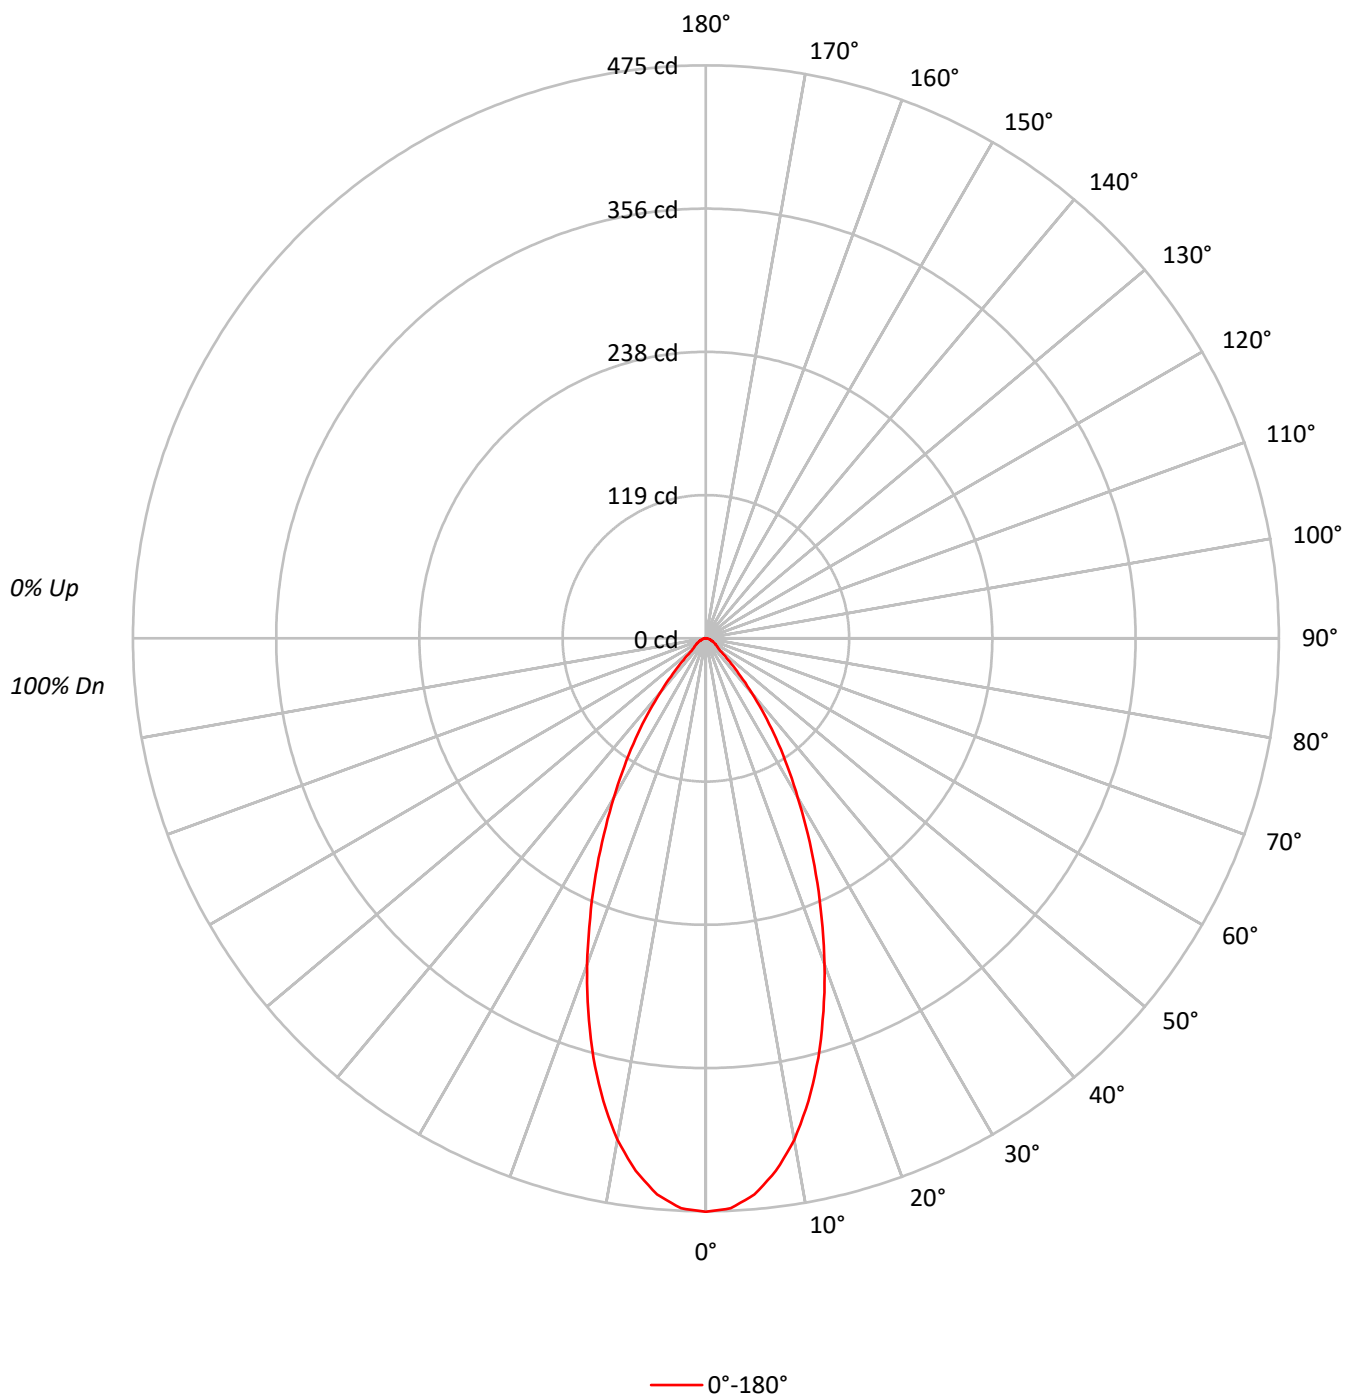

TEST NUMBER: P1269131

CATALOG NUMBER: P3AS05R459740DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	102	95	90	85	100	93	89	85	91	87	83		88	85	82		86
4	96	88	83	78	94	87	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	87	78	72	67	85	77	71	67	75	70	66		74	69	66		73
7	83	73	67	63	81	72	67	62	71	66	62		70	65	62		69
8	79	69	63	59	77	68	63	59	67	62	58		66	62	58		65
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	104246
5°	101871
10°	93986
15°	81726
20°	67136
25°	52237
30°	38563
35°	27144
40°	16946
45°	9179
50°	4981
55°	4282
60°	3815
65°	3269
70°	2821
75°	2881
80°	2399
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9179 cd/sqm

TEST NUMBER: P1269131

CATALOG NUMBER: P3AS05R459740DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.9	12.2
10°-20°	99.5	28.4
20°-30°	98.8	28.2
30°-40°	63.6	18.2
40°-50°	24.5	7.0
50°-60°	10.0	2.8
60°-70°	6.3	1.8
70°-80°	3.4	1.0
80°-90°	1.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	241.2	68.9
0°-40°	304.8	87.1
0°-60°	339.3	96.9
0°-90°	350.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	350.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	475	
5°	463	43
15°	360	100
25°	216	99
35°	101	64
45°	30	25
55°	11	10
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1269131

CATALOG NUMBER: P3AS05R459740DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	475.4
2.5°	473.0
5°	462.8
7.5°	445.3
10°	422.1
12.5°	393.0
15°	360.0
17.5°	324.1
20°	287.7
22.5°	250.8
25°	215.9
27.5°	182.9
30°	152.3
32.5°	125.6
35°	101.4
37.5°	79.6
40°	59.2
42.5°	42.7
45°	29.6
47.5°	19.9
50°	14.6
52.5°	12.1
55°	11.2
57.5°	9.7
60°	8.7
62.5°	7.3
65°	6.3
67.5°	5.3
70°	4.4
72.5°	3.9
75°	3.4
77.5°	2.4
80°	1.9
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)