

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269204

Luminaire Tested: P3AS05R609740DE010 E3DL1MW

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1269204  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R609740DE010 E3DL1MW  
Description: 3in Adjustable LED luminaire with, R60 optic, 4000K CCT AND, 97CRI , E3DL1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 510.1 lumens  
Efficiency: N/A  
Efficacy: 70.8 lumens/watt  
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1269204  
CATALOG NUMBER: P3AS05R609740DE010 E3DL1MW

### Luminous Intensity Polar Plot

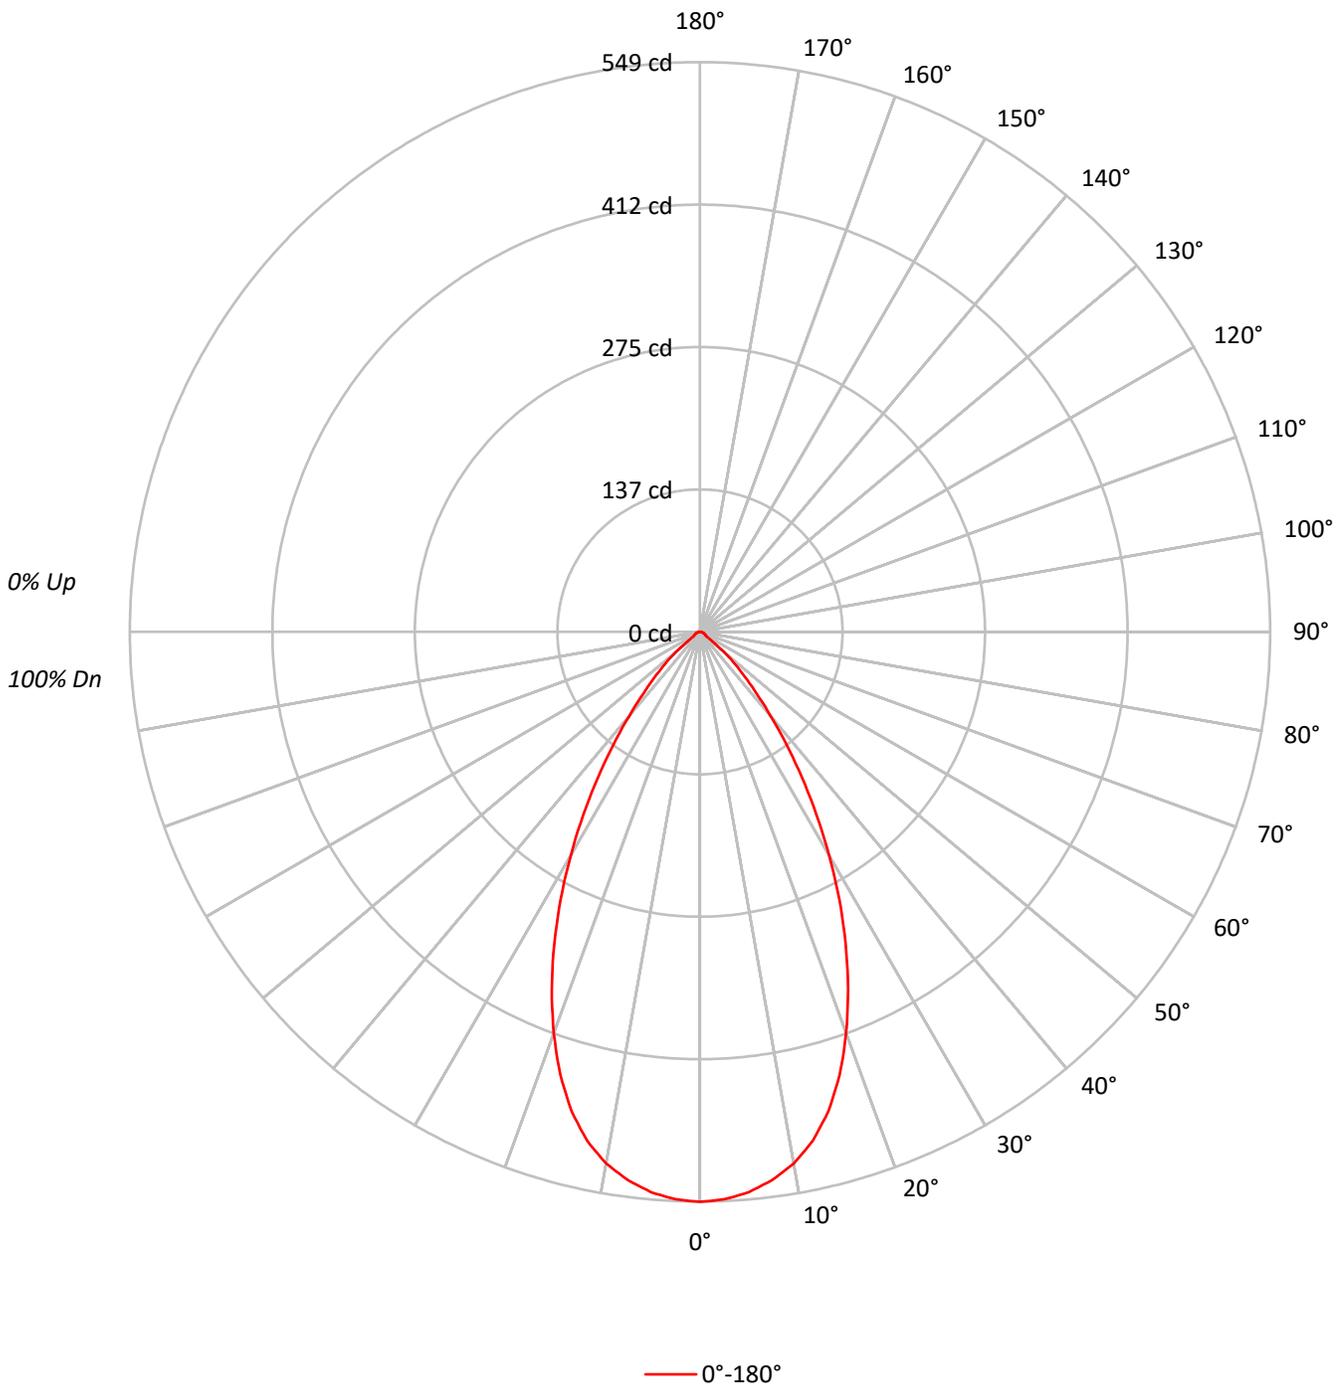



TEST NUMBER: P1269204  
 CATALOG NUMBER: P3AS05R609740DE010 E3DL1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79			
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73			
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68			
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	67	64	63			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	67	63	60	59			
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55			
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51			
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	120429
5°	119282
10°	115807
15°	108491
20°	96025
25°	80327
30°	62972
35°	45668
40°	30400
45°	18948
50°	10268
55°	2982
60°	2763
65°	2491
70°	2500
75°	2457
80°	2399
85°	2516

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 18948 cd/sqm



TEST NUMBER: P1269204  
 CATALOG NUMBER: P3AS05R609740DE010 E3DL1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.0	10.0
10°-20°	132.6	26.0
20°-30°	151.1	29.6
30°-40°	107.2	21.0
40°-50°	48.7	9.5
50°-60°	10.3	2.0
60°-70°	5.0	1.0
70°-80°	3.1	0.6
80°-90°	1.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	334.8	65.6
0°-40°	442.0	86.6
0°-60°	501.0	98.2
0°-90°	510.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	510.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	549	
5°	542	51
15°	478	133
25°	332	151
35°	171	107
45°	61	49
55°	8	10
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1269204  
CATALOG NUMBER: P3AS05R609740DE010 E3DL1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	549.2
2.5°	547.3
5°	541.9
7.5°	532.7
10°	520.1
12.5°	502.2
15°	477.9
17.5°	447.4
20°	411.5
22.5°	372.8
25°	332.0
27.5°	290.4
30°	248.7
32.5°	208.9
35°	170.6
37.5°	136.7
40°	106.2
42.5°	80.5
45°	61.1
47.5°	45.6
50°	30.1
52.5°	14.1
55°	7.8
57.5°	6.8
60°	6.3
62.5°	5.8
65°	4.8
67.5°	4.4
70°	3.9
72.5°	3.4
75°	2.9
77.5°	2.4
80°	1.9
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)