

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269231

Luminaire Tested: P3AS05R659740DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269231
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659740DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R65 optic, 4000K CCT AND, 97CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 486.0 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269231

CATALOG NUMBER: P3AS05R659740DE010 E3DL1H

Luminous Intensity Polar Plot

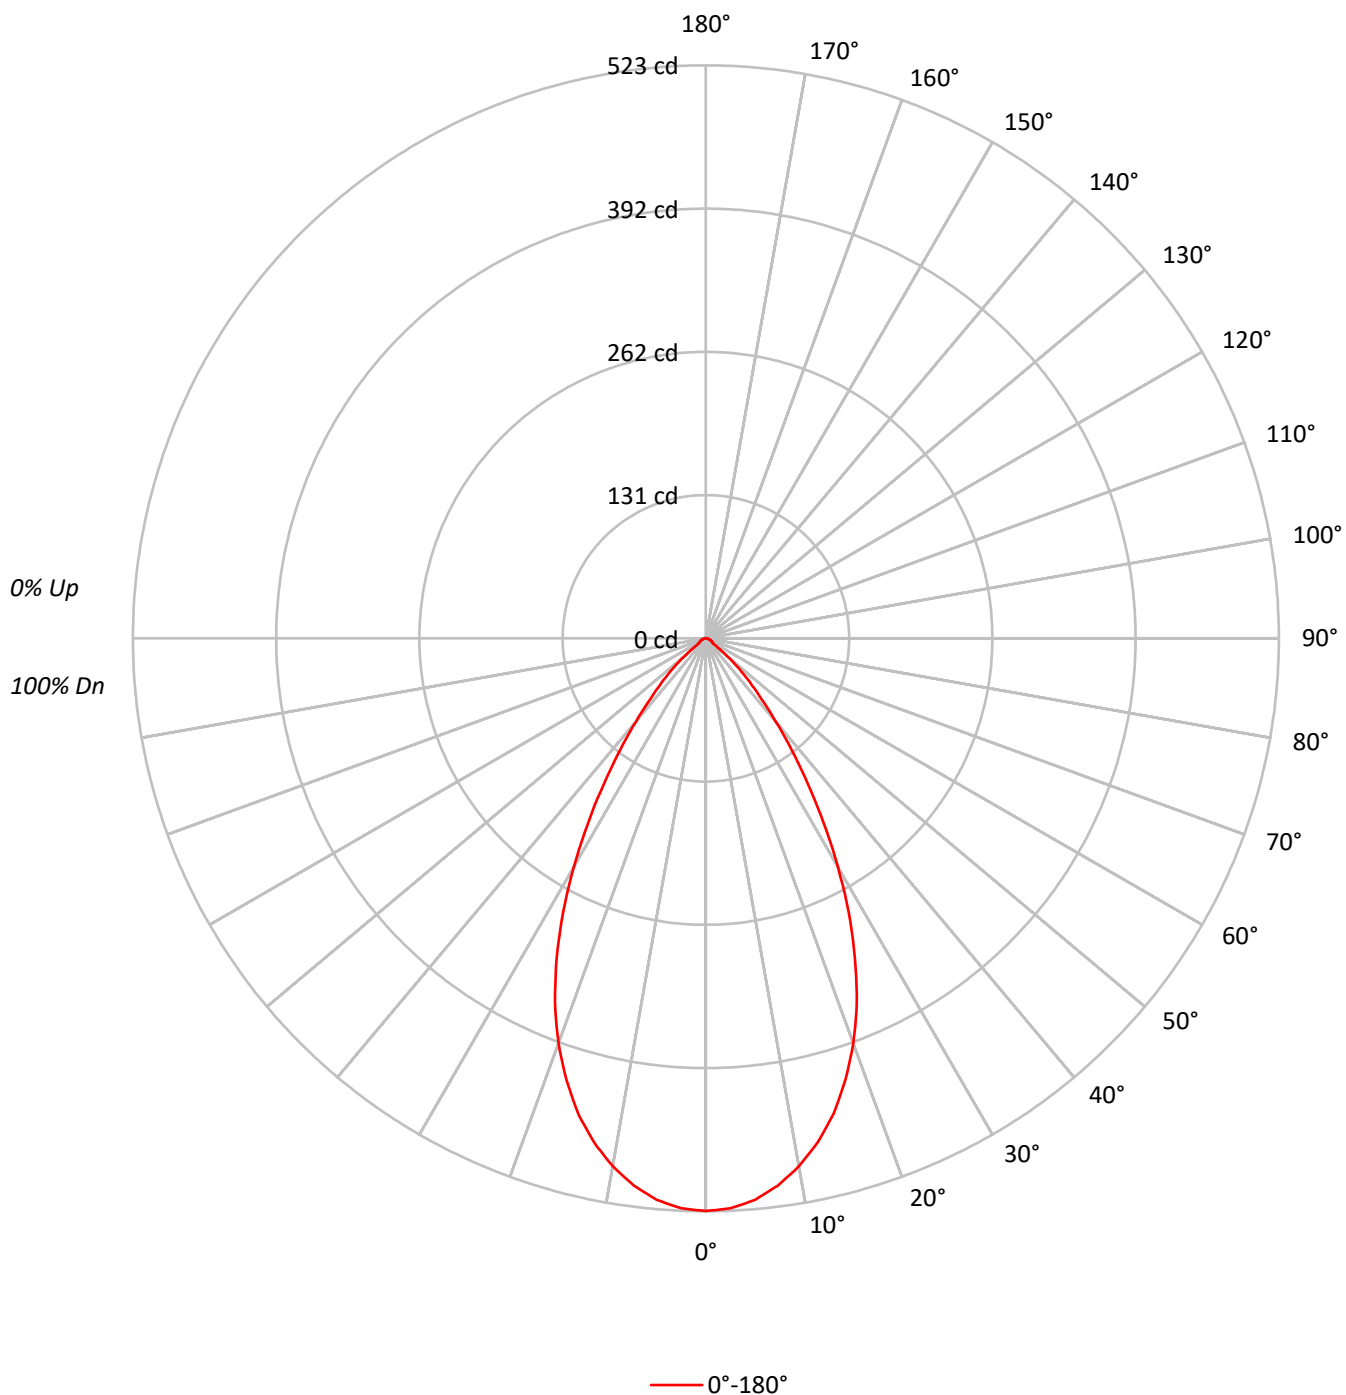

TEST NUMBER: P1269231

CATALOG NUMBER: P3AS05R659740DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		86
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	64	61		69	64	60		67
8	77	67	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	54	50	59	53	50		58	53	50		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	114618
5°	113229
10°	108949
15°	102044
20°	91778
25°	77932
30°	60971
35°	43446
40°	28425
45°	17583
50°	8938
55°	3135
60°	2763
65°	2750
70°	2500
75°	2457
80°	2399
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 17583 cd/sqm

TEST NUMBER: P1269231

CATALOG NUMBER: P3AS05R659740DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.3	9.9
10°-20°	125.1	25.7
20°-30°	146.2	30.1
30°-40°	102.2	21.0
40°-50°	45.0	9.3
50°-60°	10.0	2.1
60°-70°	5.1	1.0
70°-80°	3.1	0.6
80°-90°	1.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	319.6	65.8
0°-40°	421.8	86.8
0°-60°	476.8	98.1
0°-90°	486.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	486.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	523	
5°	514	48
15°	450	125
25°	322	146
35°	162	102
45°	57	45
55°	8	10
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1269231

CATALOG NUMBER: P3AS05R659740DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	522.7
2.5°	520.7
5°	514.4
7.5°	503.8
10°	489.3
12.5°	471.3
15°	449.5
17.5°	422.9
20°	393.3
22.5°	359.9
25°	322.1
27.5°	282.4
30°	240.8
32.5°	200.5
35°	162.3
37.5°	128.9
40°	99.3
42.5°	75.1
45°	56.7
47.5°	41.7
50°	26.2
52.5°	13.6
55°	8.2
57.5°	7.3
60°	6.3
62.5°	5.8
65°	5.3
67.5°	4.4
70°	3.9
72.5°	3.4
75°	2.9
77.5°	2.4
80°	1.9
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)