

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269435

Luminaire Tested: P3AS09R359740DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269435
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R359740DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 364.9 lumens
Efficiency: N/A
Efficacy: 32.9 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269435

CATALOG NUMBER: P3AS09R359740DE010 E3DL1GPH

Luminous Intensity Polar Plot

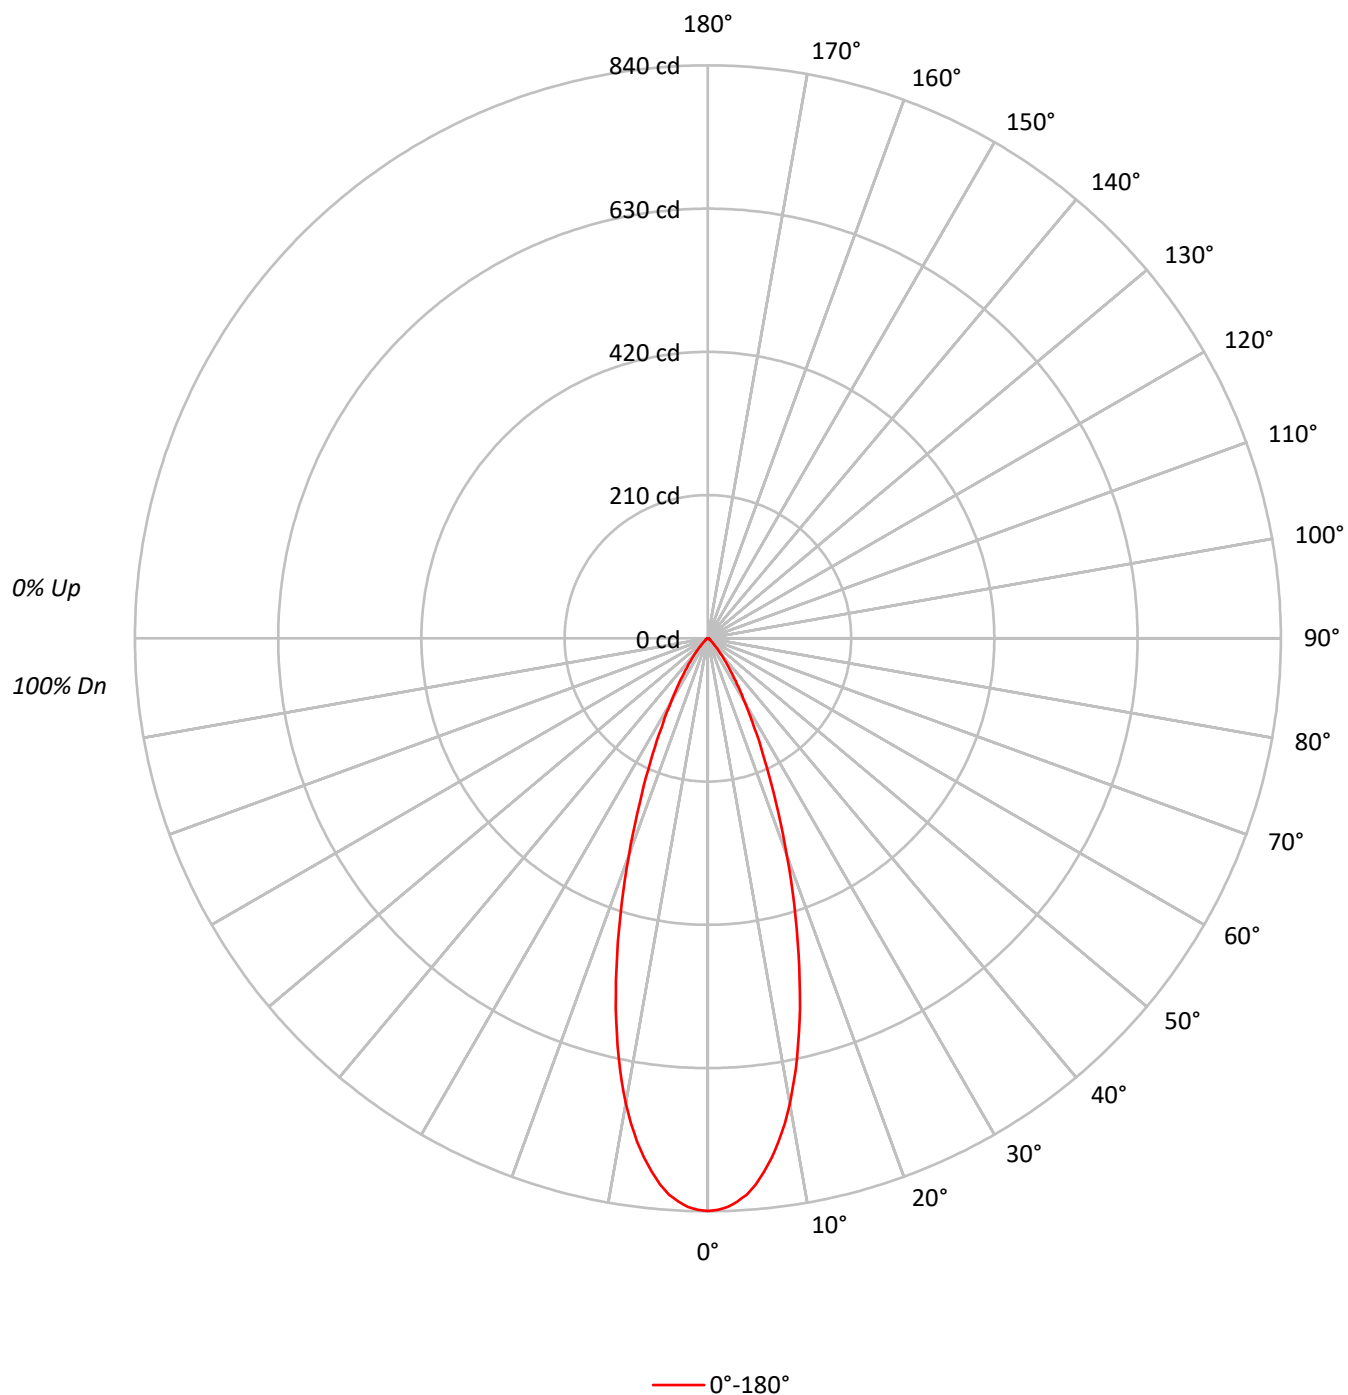

TEST NUMBER: P1269435

CATALOG NUMBER: P3AS09R359740DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	85	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	76	72	88	80	75	72	79	75	72		78	74	71		77
8	85	77	72	69	84	77	72	69	76	71	68		75	71	68		74
9	82	74	69	66	81	74	69	65	73	68	65		72	68	65		71
10	79	71	66	63	78	71	66	63	70	66	63		69	65	62		69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	184086
5°	176931
10°	154150
15°	118071
20°	78990
25°	47809
30°	27422
35°	15339
40°	8158
45°	4186
50°	2013
55°	1606
60°	1535
65°	1245
70°	1346
75°	1186
80°	1263
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4186 cd/sqm

TEST NUMBER: P1269435

CATALOG NUMBER: P3AS09R359740DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.1	20.0
10°-20°	141.7	38.8
20°-30°	92.8	25.4
30°-40°	37.6	10.3
40°-50°	11.3	3.1
50°-60°	3.8	1.1
60°-70°	2.6	0.7
70°-80°	1.5	0.4
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	307.6	84.3
0°-40°	345.3	94.6
0°-60°	360.4	98.8
0°-90°	364.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	364.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	840	
5°	804	73
15°	520	142
25°	198	93
35°	57	38
45°	14	11
55°	4	4
65°	2	3
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1269435

CATALOG NUMBER: P3AS09R359740DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	839.5
1°	838.1
2°	834.3
3°	826.7
4°	817.6
5°	803.8
6°	786.4
7°	767.0
8°	745.1
9°	720.1
10°	692.3
11°	661.4
12°	629.1
13°	593.0
14°	558.6
15°	520.1
17.5°	426.7
20°	338.5
22.5°	260.4
25°	197.6
27.5°	147.2
30°	108.3
32.5°	79.5
35°	57.3
37.5°	40.6
40°	28.5
42.5°	19.8
45°	13.5
47.5°	9.0
50°	5.9
52.5°	4.5
55°	4.2
57.5°	3.8
60°	3.5
62.5°	3.1
65°	2.4
67.5°	2.1
70°	2.1
72.5°	1.7
75°	1.4
77.5°	1.0
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3



TEST NUMBER: P1269435

CATALOG NUMBER: P3AS09R359740DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)