

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269521

Luminaire Tested: P3AS09R509740DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269521
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R509740DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R50 optic, 4000K CCT AND, 97CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 391.0 lumens
Efficiency: N/A
Efficacy: 35.2 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269521
CATALOG NUMBER: P3AS09R509740DE010 E3DL1GPH

Luminous Intensity Polar Plot

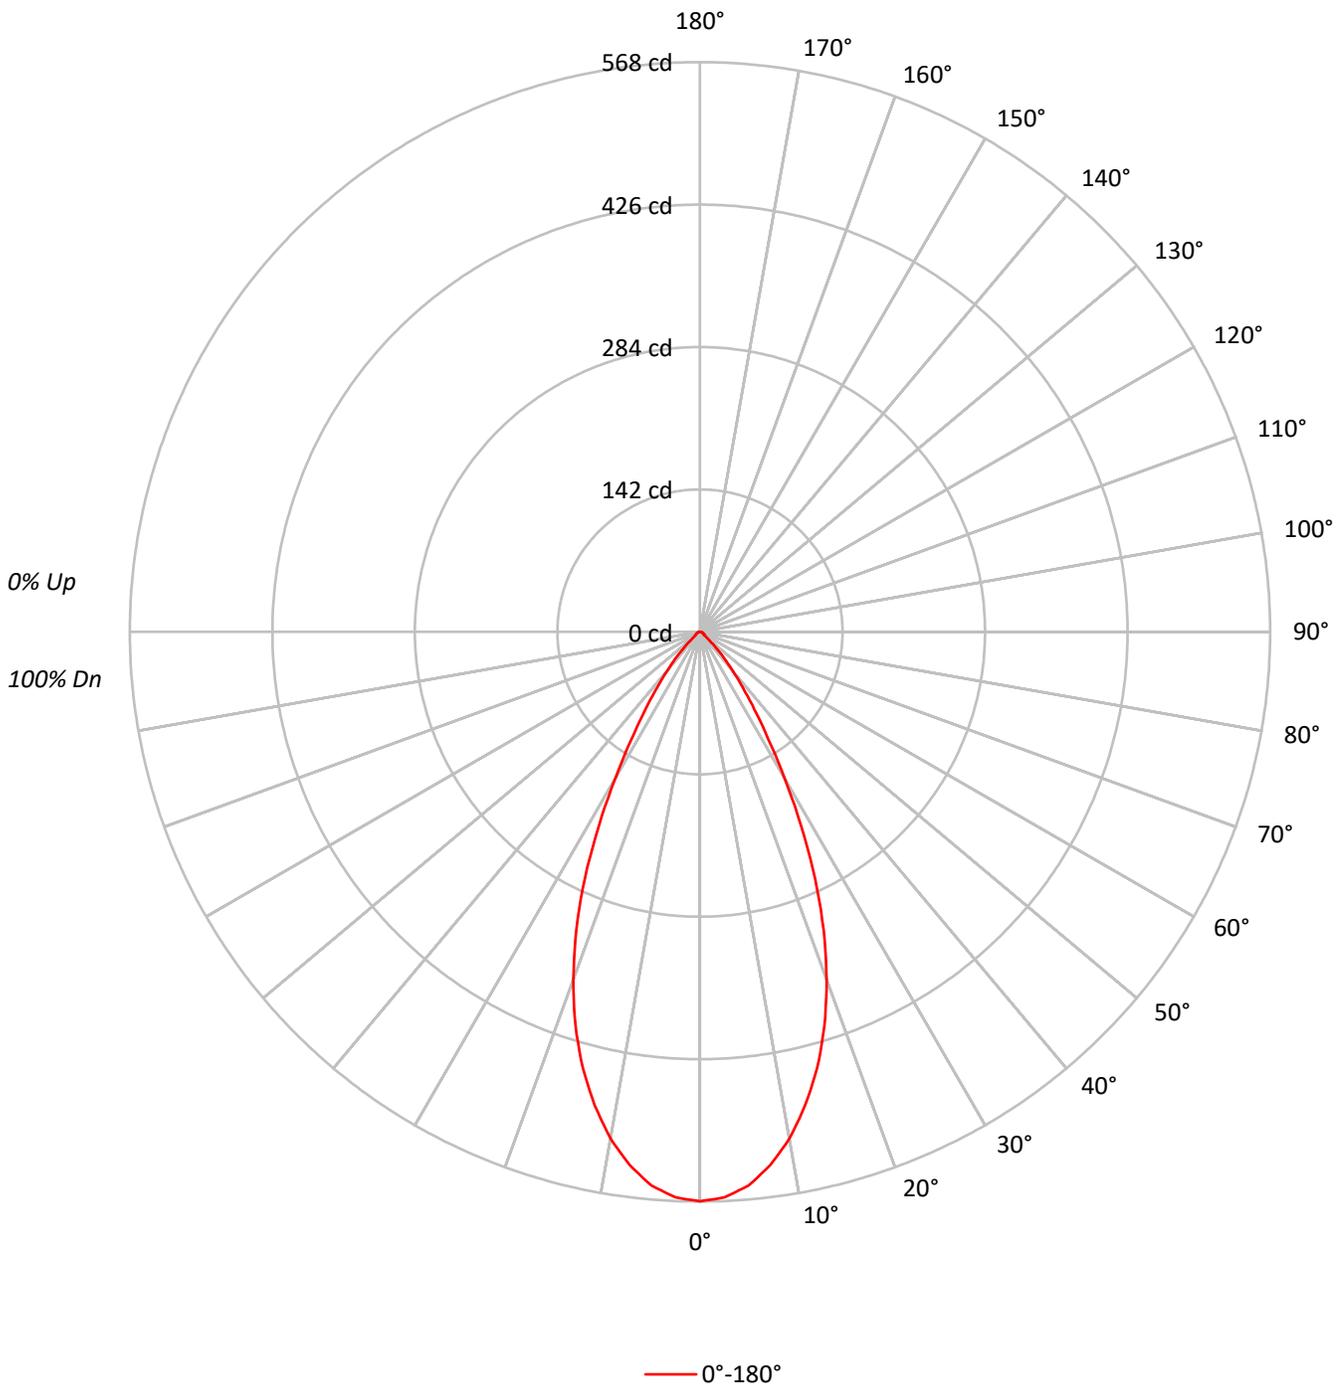



TEST NUMBER: P1269521
 CATALOG NUMBER: P3AS09R509740DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	94	94	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87	87	87	87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82	82	82	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	80	78	76	76	76	76
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72	72	72	72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	67	67	67	67
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64	64	64	64
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60	60	60	60
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57	57	57	57
10	74	65	59	56	73	65	59	56	64	59	55	63	58	55	62	58	55	54	54	54	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124486
5°	121968
10°	114249
15°	102293
20°	86084
25°	65689
30°	42690
35°	25324
40°	14627
45°	7319
50°	2729
55°	2141
60°	1974
65°	1816
70°	1795
75°	1779
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7319 cd/sqm



TEST NUMBER: P1269521
 CATALOG NUMBER: P3AS09R509740DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.6	13.2
10°-20°	124.6	31.9
20°-30°	122.2	31.3
30°-40°	61.6	15.8
40°-50°	19.5	5.0
50°-60°	5.1	1.3
60°-70°	3.6	0.9
70°-80°	2.2	0.6
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	298.4	76.3
0°-40°	360.0	92.1
0°-60°	384.5	98.3
0°-90°	391.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	391.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	568	
5°	554	52
15°	451	125
25°	272	122
35°	95	62
45°	24	19
55°	6	5
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1269521
CATALOG NUMBER: P3AS09R509740DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	567.7
2.5°	564.2
5°	554.1
7.5°	536.1
10°	513.1
12.5°	483.6
15°	450.6
17.5°	412.3
20°	368.9
22.5°	321.9
25°	271.5
27.5°	218.0
30°	168.6
32.5°	126.9
35°	94.6
37.5°	69.9
40°	51.1
42.5°	36.2
45°	23.6
47.5°	13.6
50°	8.0
52.5°	5.9
55°	5.6
57.5°	4.9
60°	4.5
62.5°	4.2
65°	3.5
67.5°	3.1
70°	2.8
72.5°	2.4
75°	2.1
77.5°	1.7
80°	1.4
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)