

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1269562

Luminaire Tested: P3AS09R559740DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1269562
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559740DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 253.0 lumens
Efficiency: N/A
Efficacy: 22.8 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1269562

CATALOG NUMBER: P3AS09R559740DE010 E3DLP1GPH

Luminous Intensity Polar Plot

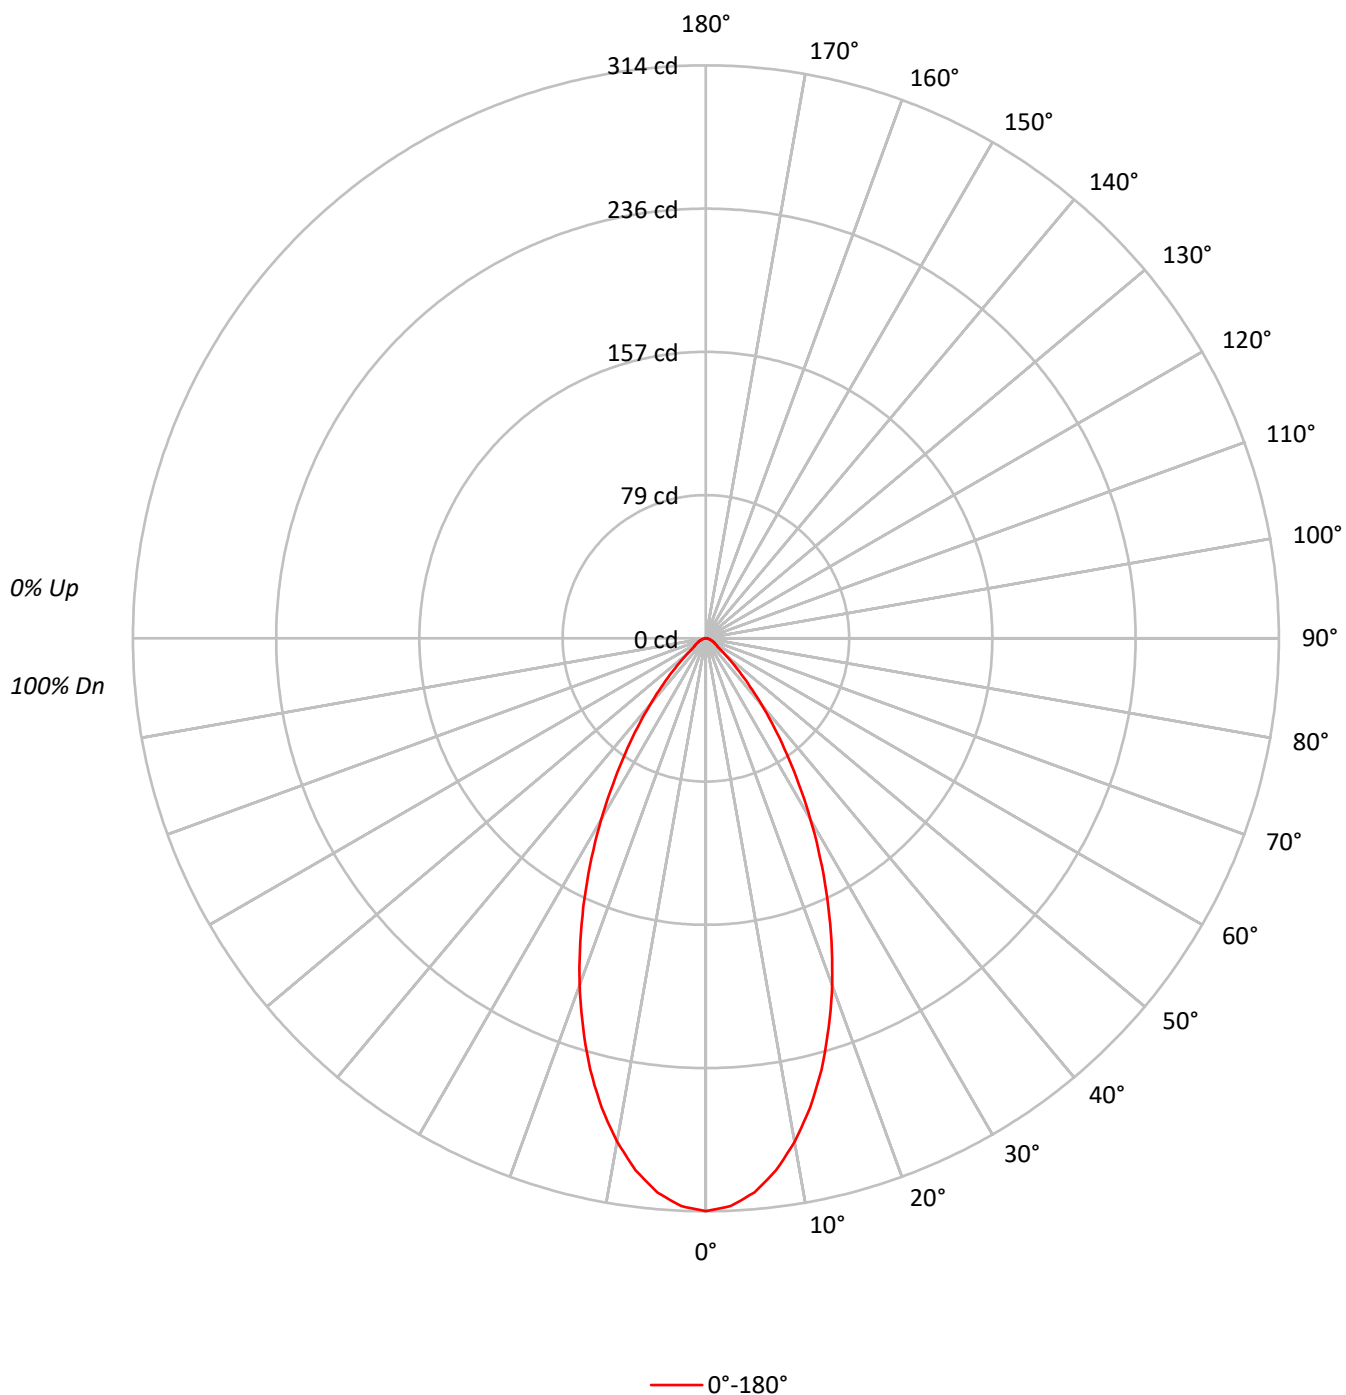

TEST NUMBER: P1269562

CATALOG NUMBER: P3AS09R559740DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		97
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		86
4	96	88	82	77	94	87	81	77	84	80	76		82	78	75		80
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61
10	70	60	55	51	69	60	54	50	59	54	50		58	54	50		58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	68832
5°	67092
10°	62368
15°	55551
20°	47207
25°	38107
30°	29042
35°	20666
40°	13626
45°	8094
50°	4742
55°	2906
60°	2588
65°	2335
70°	1988
75°	1779
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8094 cd/sqm

TEST NUMBER: P1269562

CATALOG NUMBER: P3AS09R559740DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.3	11.2
10°-20°	67.8	26.8
20°-30°	71.9	28.4
30°-40°	48.6	19.2
40°-50°	21.3	8.4
50°-60°	7.6	3.0
60°-70°	4.4	1.8
70°-80°	2.3	0.9
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	168.0	66.4
0°-40°	216.6	85.6
0°-60°	245.5	97.0
0°-90°	253.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	253.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	314	
5°	305	28
15°	245	68
25°	158	72
35°	77	49
45°	26	21
55°	8	8
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1269562

CATALOG NUMBER: P3AS09R559740DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	313.9
2.5°	311.4
5°	304.8
7.5°	294.1
10°	280.1
12.5°	263.5
15°	244.7
17.5°	223.8
20°	202.3
22.5°	179.7
25°	157.5
27.5°	135.6
30°	114.7
32.5°	94.9
35°	77.2
37.5°	61.2
40°	47.6
42.5°	35.8
45°	26.1
47.5°	19.1
50°	13.9
52.5°	9.7
55°	7.6
57.5°	7.0
60°	5.9
62.5°	5.2
65°	4.5
67.5°	3.8
70°	3.1
72.5°	2.8
75°	2.1
77.5°	1.7
80°	1.4
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)